




## AD-CJ2312 Plastic-Encapsulated MOSFET

### AD-CJ2312 N-Channel MOSFET

| $V_{(BR)DSS}$ | $R_{DS(on), max}$ | $I_D$ |
|---------------|-------------------|-------|
| 20V           | 35.6mΩ@2.5V       | 5A    |
|               | 31.8mΩ @ 4.5V     |       |
|               | 41.4mΩ@1.8V       |       |

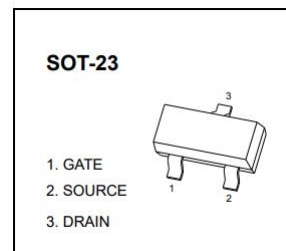


### FEATURES

- Trench FET Power MOSFET
- AEC-Q101 qualified

### APPLICATIONS


- Load switching for portable applications
- DC/DC converter

### MARKING



S12 = Device code

### EQUIVALENT CIRCUIT

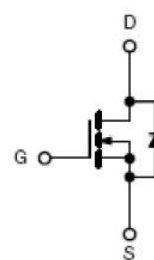

**MAXIMUM RATINGS ( $T_j = 25^\circ\text{C}$  unless otherwise specified)**

| Parameter   | Symbol                        | Value     | Unit               |
|---|-------------------------------|-----------|--------------------|
| Drain-source voltage  | $V_{DS}$                      | 20        | V                  |
| Gate-source voltage   | $V_{GS}$                      | $\pm 8$   | V                  |
| Continuous drain current                                    | $I_D$                         | 5         | A                  |
| Pulsed Drain Current <sup>1)</sup>                          | $I_{DM}$                      | 20        | A                  |
| Continuous Source-Drain Diode Current                       | $I_S$                         | 1.04      | A                  |
| Power dissipation   | $P_D$                         | 0.35      | W                  |
| Thermal resistance from junction to ambient ( $t \leq 5s$ ) | $R_{\theta JA}$ <sup>2)</sup> | 357       | $^\circ\text{C/W}$ |
| Operating junction and storage temperature range            | $T_j, T_{stg}$                | -55 ~ 150 | $^\circ\text{C}$   |

**ELECTRICAL CHARACTERISTICS ( $T_j = 25^\circ\text{C}$  unless otherwise specified)**


| Parameter                                      | Symbol               | Test condition  | Min  | Typ   | Max    | Un<br>it |
|--|----------------------|---|------|-------|--------|----------|
| Static characteristics                         |                      |   |      |       |        |          |
| Drain-source breakdown voltage                 | V <sub>(BR)DSS</sub> | V <sub>GS</sub> = 0V, I <sub>D</sub> = 250μA  | 20   | -     | -      | V        |
| Zero gate voltage drain current                | I <sub>DSS</sub>     | V <sub>DS</sub> = 20V, V <sub>GS</sub> = 0V   | -    | -     | 1      | μA       |
| Gate-body leakage current                      | I <sub>GSS</sub>     | V <sub>GS</sub> = ±8V, V <sub>DS</sub> = 0V   | -    | -     | ±100   | nA       |
| Gate threshold voltage                         | V <sub>GS(th)</sub>  | V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> = 250μA  | 0.45 | 0.7   | 1      | V        |
| Forward transconductance <sup>1)</sup>         | g <sub>fs</sub>      | V <sub>DS</sub> = 10V, I <sub>D</sub> = 5A  | -    | 6     | -      | S        |
| Diode forward voltage                          | V <sub>SD</sub>      | I <sub>S</sub> = 4A, V <sub>GS</sub> = 0V   | -    | 0.75  | 1.2    | V        |
| Drain-source on-state resistance <sup>1)</sup> | R <sub>DS(on)</sub>  | V <sub>GS</sub> = 4.5V, I <sub>D</sub> = 5A   | -    | 0.018 | 0.0318 | Ω        |
|  |                      | V <sub>GS</sub> = 2.5V, I <sub>D</sub> = 4.7A   | -    | 0.023 | 0.0356 |          |
|  |                      | V <sub>GS</sub> = 1.8V, I <sub>D</sub> = 4.3A   | -    | 0.03  | 0.0414 |          |
| Dynamic characteristics <sup>2)</sup>          |                      |   |      |       |        |          |
| Input capacitance                              | C <sub>iss</sub>     | V <sub>DS</sub> = 10V, V <sub>GS</sub> = 0V, f = 1MHz   | -    | 865   | -      | pF       |
| Output capacitance                             | C <sub>oss</sub>     |   | -    | 105   | -      |          |
| Reverse transfer capacitance                   | C <sub>rss</sub>     |   | -    | 55    | -      |          |
| Gate resistance                                | R <sub>g</sub>       | f = 1MHz  | 0.5  | -     | 4.8    | Ω        |
| Switching parameters <sup>2)</sup>             |                      |   |      |       |        |          |
| Turn-on delay time                             | t <sub>d(on)</sub>   | V <sub>DD</sub> = 10V, I <sub>D</sub> = 4A ,<br>V <sub>GEN</sub> = 5V, R <sub>G</sub> = 1Ω, R <sub>L</sub> = 2.2Ω | -    | -     | 10     | ns       |
| Turn-off delay time                            | t <sub>d(off)</sub>  |   | -    | -     | 32     |          |
| Rise time                                      | t <sub>r</sub>       |   | -    | -     | 20     |          |
| Fall time                                      | t <sub>f</sub>       |   | -    | -     | 12     |          |

1) Pulse test: Pulse width  $\leq 300\mu s$ , duty cycle  $\leq 2\%$ .





2) These parameters have no way to verify..

## TYPICAL CHARACTERISTICS


Output Characteristics

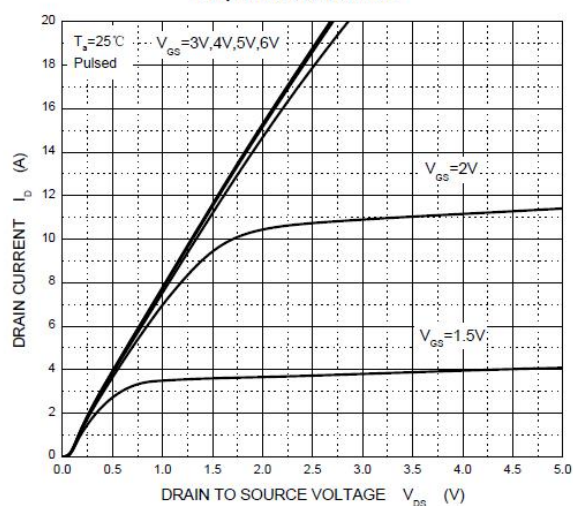


Transfer Characteristics

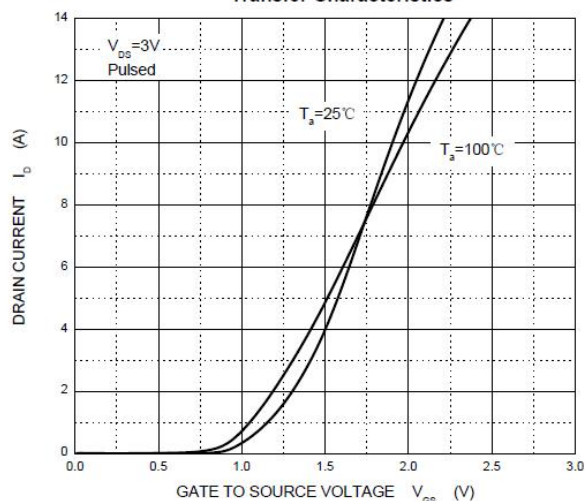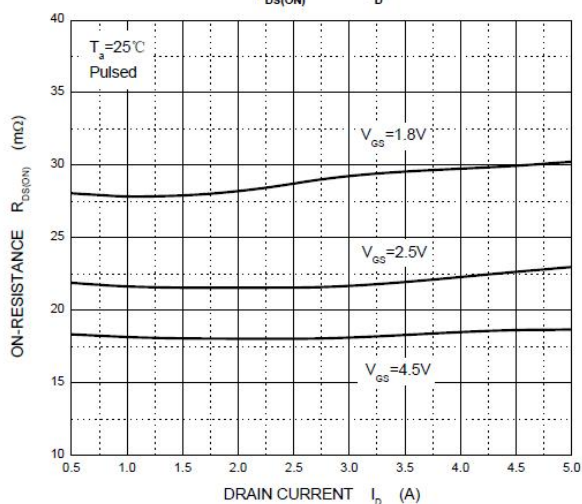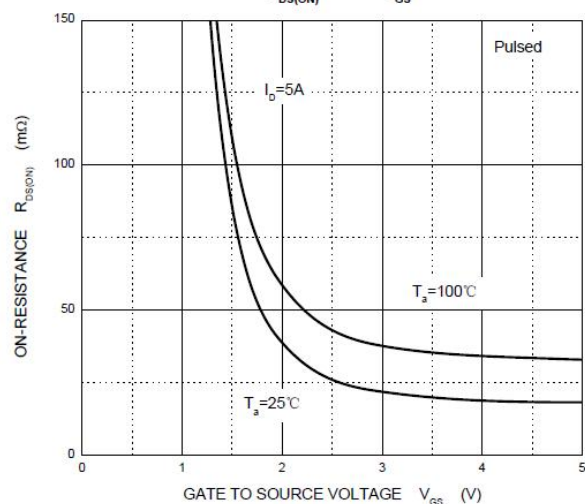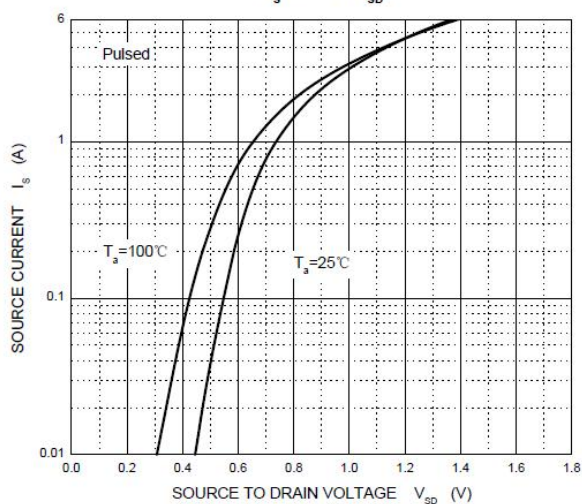
 $R_{DS(ON)}$  —  $I_D$  $R_{DS(ON)}$  —  $V_{GS}$  $I_S$  —  $V_{SD}$ 

Threshold Voltage

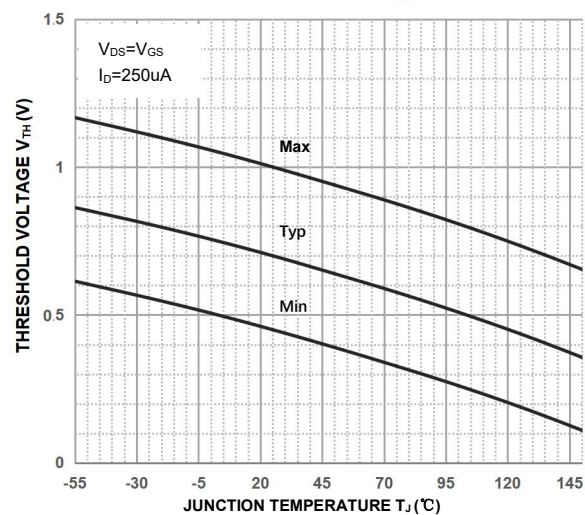

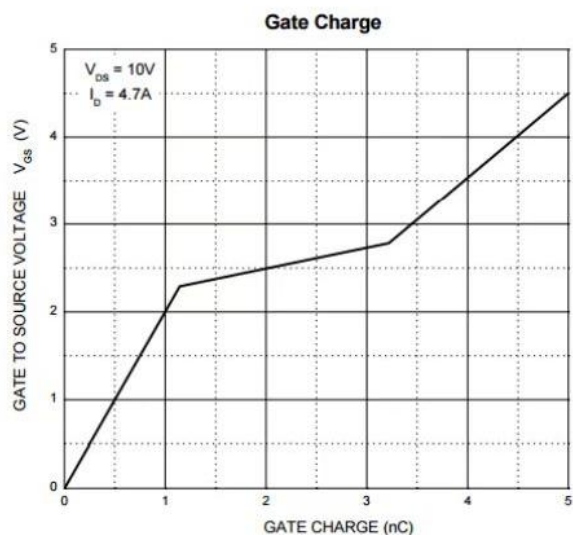


## SOT-23 PACKAGE OUTLINE DIMENSIONS

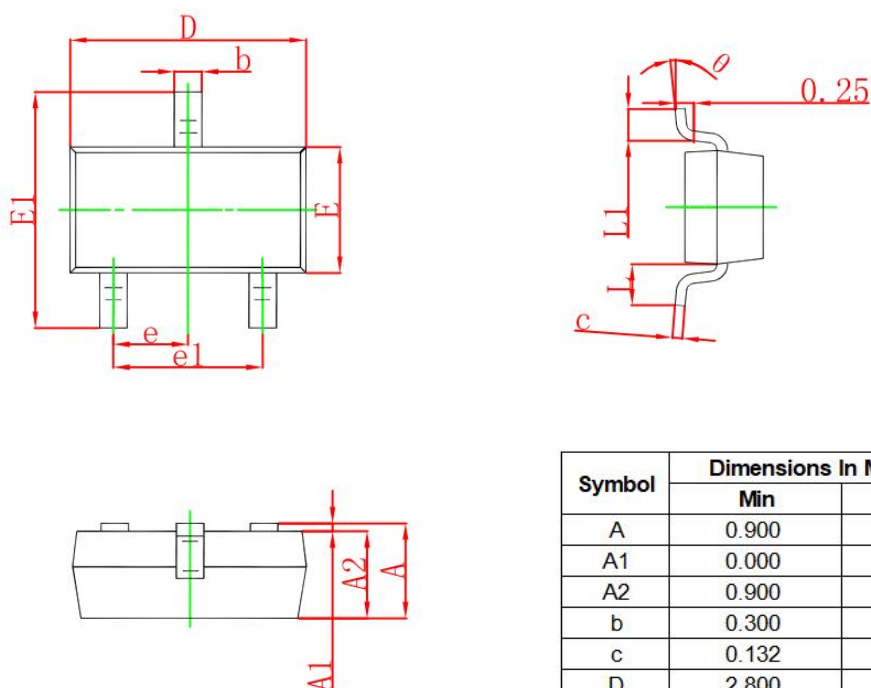

| Symbol | Dimensions In Millimeters |       | Dimensions In Inches |       |
|--------|---------------------------|-------|----------------------|-------|
|        | Min                       | Max   | Min                  | Max   |
| A      | 0.900                     | 1.150 | 0.035                | 0.045 |
| A1     | 0.000                     | 0.100 | 0.000                | 0.004 |
| A2     | 0.900                     | 1.050 | 0.035                | 0.041 |
| b      | 0.300                     | 0.500 | 0.012                | 0.020 |
| c      | 0.132                     | 0.202 | 0.005                | 0.008 |
| D      | 2.800                     | 3.000 | 0.110                | 0.118 |
| E      | 1.200                     | 1.400 | 0.047                | 0.055 |
| E1     | 2.250                     | 2.550 | 0.089                | 0.100 |
| e1     | 1.800                     | 2.000 | 0.071                | 0.079 |
| L      | 0.55REF                   |       | 0.022 REF            |       |
| L1     | 0.300                     | 0.500 | 0.012                | 0.020 |
| θ      | 0°                        | 8°    | 0°                   | 8°    |

## SOT-23 SUGGESTED PAD LAYOUT

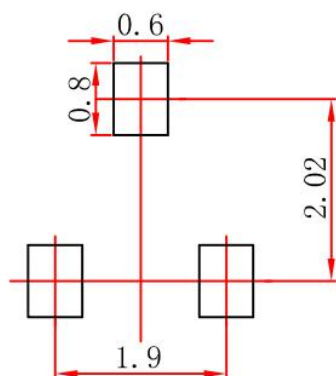


## Note:

1. Controlling dimension in millimeters.
2. General tolerance:  $\pm 0.05\text{mm}$ .
3. The pad layout is for reference purpose only.

## SOT-23 TAPE AND REEL

### SOT-23 Embossed Carrier Tape

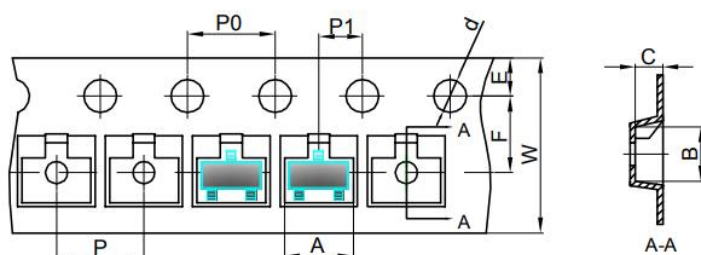


#### Packaging Description:


SOT-23 parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 3,000 units per 7" or 17.8cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

| Dimensions are in millimeter |      |      |      |       |      |      |      |      |      |      |
|------------------------------|------|------|------|-------|------|------|------|------|------|------|
| Pkg type                     | A    | B    | C    | d     | E    | F    | P0   | P    | P1   | W    |
| SOT-23                       | 3.15 | 2.77 | 1.22 | Ø1.50 | 1.75 | 3.50 | 4.00 | 4.00 | 2.00 | 8.00 |

### SOT-23 Tape Leader and Trailer

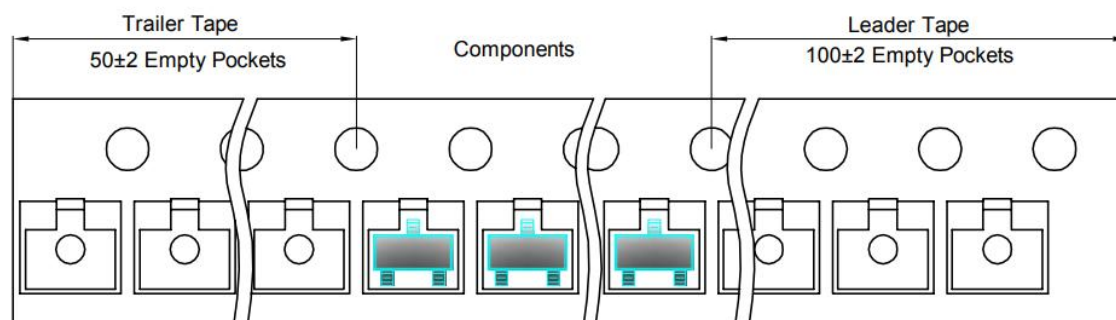

### SOT-23 Reel

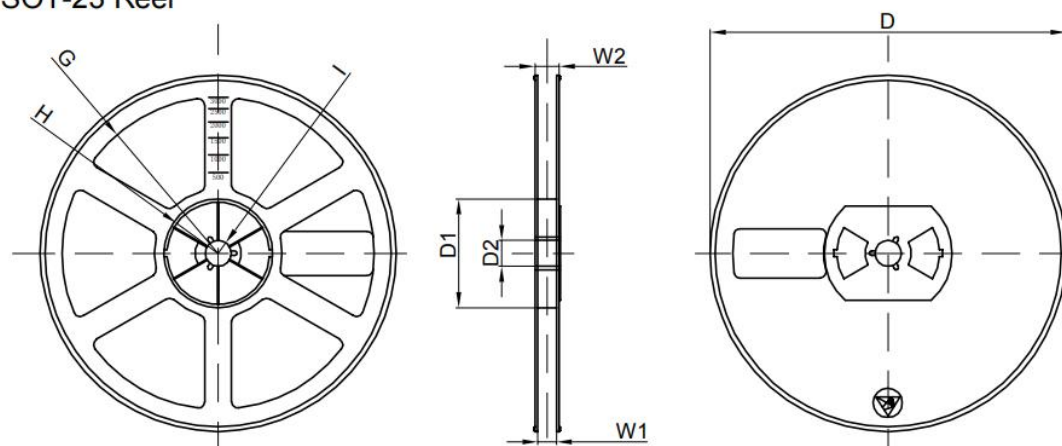

| Dimensions are in millimeter |         |       |       |        |        |       |      |       |
|------------------------------|---------|-------|-------|--------|--------|-------|------|-------|
| Reel Option                  | D       | D1    | D2    | G      | H      | I     | W1   | W2    |
| 7"Dia                        | Ø178.00 | 54.40 | 13.00 | R78.00 | R25.60 | R6.50 | 9.50 | 12.30 |

| REEL     | Reel Size | Box        | Box Size(mm) | Carton      | Carton Size(mm) | G.W.(kg) |
|----------|-----------|------------|--------------|-------------|-----------------|----------|
| 3000 pcs | 7 inch    | 30,000 pcs | 203×203×195  | 120,000 pcs | 438×438×220     |          |

**PUBLISHED BY****JIANGSU CHANGJING ELECTRONICS TECHNOLOGY CO., LTD.****13th Floor, C Block, Tengfei Building, Yan Chuang Yuan, Nanjing Jiangbei New Area, China****LEGAL DISCLAIMER**

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples, hints or typical values stated herein and/or any information regarding the application of the device, JSCJ hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of JSCJ in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

**INFORMATION**

For further information on technology, delivery terms and conditions as well as prices, please contact your nearest JSCJ office ([www.jscj-elec.com](http://www.jscj-elec.com)).

**WARNINGS**

Due to technical requirements, products may contain dangerous substances. For information on the types in question, please contact your nearest JSCJ office.

Except as otherwise explicitly approved by JSCJ in a written document signed by authorized representatives of JSCJ, JSCJ's products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.