


DC Brushless FAN 120x120x25-A Type




轴承结构：双滚珠、含油、液压、其他
Bearing: two ball、sleeve、HY、other
框外材质: 塑胶(等级:UL94V-0)
Frame: Plastic(Flammability:UL94V-0)
扇叶材质: 塑胶:(等级:UL94V-0)
Impeller: Plastic:(Flammability:UL94V-0)
风扇单重: 150g(Weight: 150g)

P@Q CURVE(AT RATED VOLTAGE)

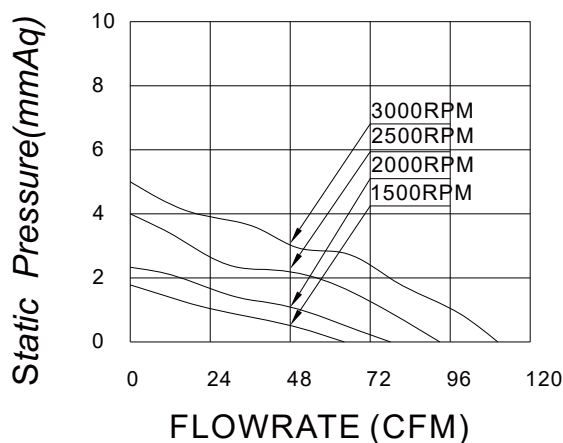

DIMENSIONS DRAWING(unit:mm)

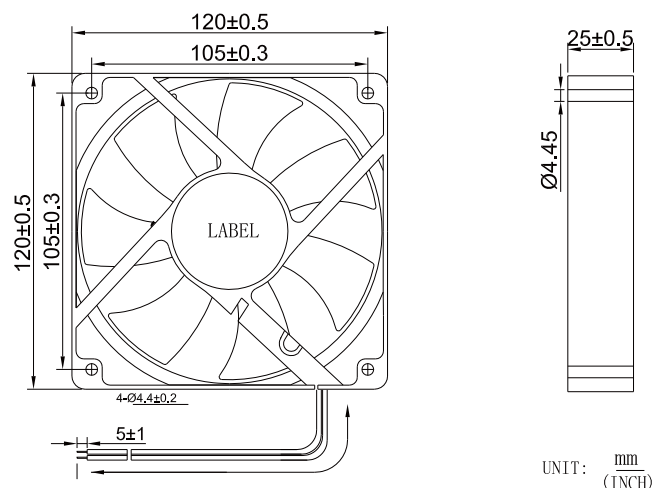

UNIT: $\frac{\text{mm}}{(\text{INCH})}$

编码规则 Code Rule

例子 Example 12038H12B-1701
12038H12X-AY

Model No. is 12038H12X; Extro P/N code is AY

X means bearing type, can be S(sleeve bearing), can be B(ball bearing), can be Y(HY bearing), can be SU(sleeve with UL), can be BU(ball with UL), can be YU(HY with UL)

Y means special function code, it will be used for a certain parts no. or client.

产品型号 12038H12X; 附加代码 AY. X是一个不确定值, 它代表了不同的轴承类型, S(含油轴承), B(滚珠轴承), Y(液压轴承), SU(含油轴承带UL), BU(滚珠轴承带UL), YU(液压轴承带UL)

Y是一个不确定的值, 它代表不同特殊风机功能, 由具体客户或者料号来确定

Model	P/N Code	Rated Voltage	Operationg Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Noise
型号	P/N 附加码	额定电压	工作电压范围	额定电流	额定输入功率	转速	最大风量		最大风压		噪音
PART.NO.		VDC	VDC	Amp	Watt	R.P.M	M³/min	CFM	mmH2O	InH2O	dB-A
MG12025L12X	AY	12	8~13.5	0.18	2.16	1500	1.820	64.2	1.76	0.069	30.5
MG12025M12X		12	8~13.5	0.25	3.0	2000	2.171	76.6	2.43	0.096	36.5
MG12025H12X		12	8~13.5	0.31	3.72	2500	2.617	92.4	3.98	0.157	42.1
MG12025HH12X		12	8~13.5	0.45	5.4	3000	3.041	107.	5.04	0.198	47.4
MG12025L24X		24	18~26.5	0.09	2.16	1500	1.820	64.2	1.76	0.069	30.5
MG12025M 24X		24	18~26.5	0.125	3.0	2000	2.171	76.6	2.43	0.096	36.5
MG12025H24X		24	18~26.5	0.155	3.72	2500	2.617	92.4	3.98	0.157	42.1
MG12025HH24X		24	18~26.5	0.225	5.4	3000	3.041	107.	5.04	0.198	47.4
MG12025L48X		48	36~54	0.045	2.16	1500	1.820	64.2	1.76	0.069	30.5
MG12025M48X		48	36~54	0.063	3.0	2000	2.171	76.6	2.43	0.096	36.5
MG12025H48X		48	36~54	0.078	3.72	2500	2.617	92.4	3.98	0.157	42.1
MG12025HH48X		48	36~54	0.112	5.4	3000	3.041	107.	5.04	0.198	47.4