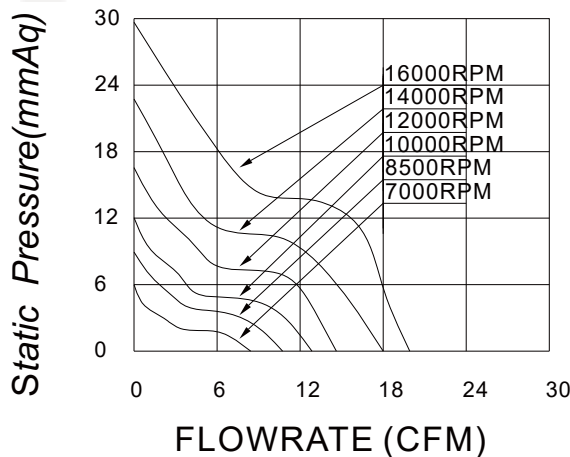
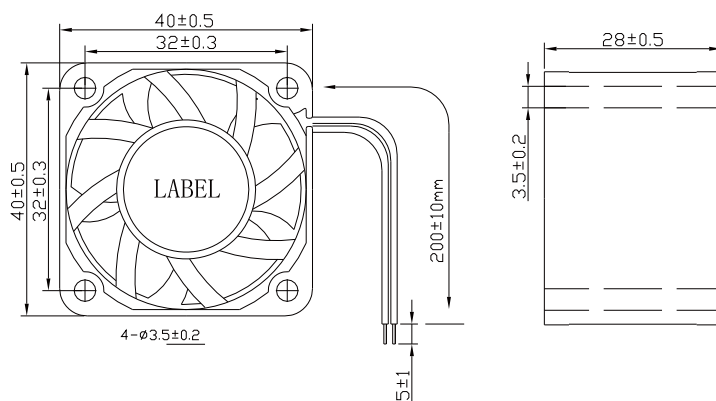


**DC Brushless FAN
40x40x28mm-A Type**

轴承结构：双滚珠、含油、液压、其他
Bearing: two ball、sleeve、HY、other
框外材质: 塑胶(等级:UL94V-0)
Frame:Plastic(Flammability:UL94V-0)
扇叶材质:塑胶:(等级:UL94V-0)
Impeller:Plastic:(Flammability:UL94V-0)
风扇单重:35g(Weight:35g)

P@Q CURVE(AT RATEDVOLTAGE)**DIMENSIONS DRAWING(unit:mm)****编码规则 Code Rule**

例子 Example 12038H12B-1701
12038H12X-AY

Model No. is 12038H12 X; Extro P/N code is AY

X means bearing type, can be S(sleeve bearing), can be B(ball bearing), can be Y(HY bearing), can be SU(sleeve with UL), can be BU(ball with UL), can be YU(HY with UL)

Y means special function code, it will be used for a certain parts no. or client.

产品型号 12038H12X; 附加代码 AY. X是一个不确定值, 它代表了不同的轴承类型,

S(含油轴承), B(滚珠轴承), Y(液压轴承), SU(含油轴承带UL), BU(滚珠轴承带UL), YU(液压轴承带UL)

Y是一个不确定的值, 它代表不同特殊风机功能, 由具体客户或者料号来确定

Model	P/N Code	Rated Voltage	Operationg Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Noise
型号	P/N 附加码	额定电压	工作电压范围	额定电流	额定输入功率	转速	最大风量		最大风压		噪音
PART.NO.	AY	VDC	VDC	Amp	Watt	R.P.M	M³/min	CFM	mmH2O	InH2O	dB-A
MG4028M12X		12	7~13.5	0.15	1.8	7000	0.247	8.73	6.07	0.239	36.6
MG4028H12X		12	7~13.5	0.23	2.76	8500	0.302	10.6	8.70	0.343	37.3
MG4028HH12X		12	7~13.5	0.31	3.72	10000	0.358	12.6	12.05	0.474	41.1
MG4028HV12X		12	7~13.5	0.40	4.8	12000	0.427	15.0	16.84	0.663	47.3
MG4028UH12X		12	7~13.5	0.48	5.76	14000	0.507	17.9	22.74	0.895	50.9
MG4028VH12X		12	7~13.5	0.6	7.2	16000	0.579	20.4	29.62	1.166	52.6
MG4028M24X		24	18~26.5	0.08	1.8	7000	0.247	8.73	6.07	0.239	36.6
MG4028H24X		24	18~26.5	0.115	2.76	8500	0.302	10.6	8.70	0.343	37.3
MG4028HH24X		24	18~26.5	0.16	3.72	10000	0.358	12.6	12.05	0.474	41.1
MG4028HV24X		24	18~26.5	0.2	4.8	12000	0.427	15.0	16.84	0.663	47.3
MG4028UH24X		24	18~26.5	0.24	5.76	14000	0.507	17.9	22.74	0.895	50.9
MG4028VH24X		24	18~26.5	0.3	7.2	16000	0.579	20.4	29.62	1.166	52.6