


TO-126 Plastic-Encapsulate Transistors

BD433 / BD435 / BD437 TRANSISTOR (NPN)

FEATURES

- Amplifier and Switching Applications
- Complement To BD434, BD436 And BD438

MARKING

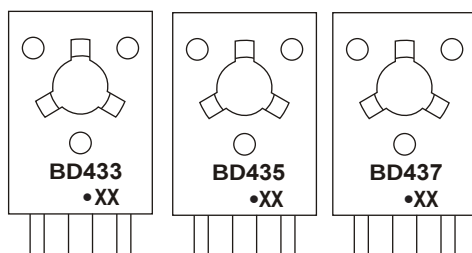


BD433,BD435,BD437=Device code

Solid dot = Green molding compound device, if none, the normal device


XX=Code

TO - 126

1. EMITTER
2. COLLECTOR
3. BASE



Equivalent Circuit



ORDERING INFORMATION

Part Number	Package	Packing Method	Pack Quantity
BD433	TO-126	Bulk	200pcs/Bag
BD435	TO-126	Bulk	200pcs/Bag
BD437	TO-126	Bulk	200pcs/Bag
BD433-TU	TO-126	Tube	60pcs/Tube
BD435-TU	TO-126	Tube	60pcs/Tube
BD437-TU	TO-126	Tube	60pcs/Tube

MAXIMUM RATINGS (T_a=25°C unless otherwise noted)

Symbol	Parameter	Value	Unit
V _{CBO}	Collector-Base Voltage	BD433	22
		BD435	32
		BD437	45
V _{CEO}	Collector-Emitter Voltage	BD433	22
		BD435	32
		BD437	45
V _{EBO}	Emitter-Base Voltage	5	V
I _C	Collector Current –Continuous	4	A
P _C	Collector Power Dissipation	1.25	W
T _J ,T _{stg}	Operation Junction and Storage Temperature Range	-55-150	°C


ELECTRICAL CHARACTERISTICS

$T_a=25\text{ }^{\circ}\text{C}$ unless otherwise specified

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=100\mu A, I_E=0$ BD433 BD435 BD437	22 32 45			V
Collector-emitter breakdown voltage	$V_{CE(SUS)}^{(1)}$	$I_C=100mA, I_B=0$ BD433 BD435 BD437	22 32 45			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=100\mu A, I_C=0$	5			V
Collector cut-off current	I_{CBO}	$V_{CB}=22V, I_E=0$ BD433 $V_{CB}=32V, I_E=0$ BD435 $V_{CB}=45V, I_E=0$ BD437			100	μA
Collector cut-off current	I_{CEO}	$V_{CE}=22V, I_E=0$ BD433 $V_{CE}=32V, I_E=0$ BD435 $V_{CE}=45V, I_E=0$ BD437			100	μA
Emitter cut-off current	I_{EBO}	$V_{EB}=5V, I_E=0$			1	mA
DC current gain	$h_{FE(1)}^{(1)}$	$V_{CE}=1V, I_C=500mA$	85		375	
	$h_{FE(2)}^{(1)}$	$V_{CE}=5V, I_C=10mA$ BD433/BD435 BD437	40 30			
	$h_{FE(3)}^{(1)}$	$V_{CE}=1V, I_C=2A$ BD433/BD435 BD437	50 40			
Collector-emitter saturation voltage	$V_{CE(sat)}^{(1)}$	$I_C=2A, I_B=0.2A$ BD433/BD435 BD437			0.5 0.6	V
Base-emitter voltage	$V_{BE}^{(1)}$	$V_{CE}=1V, I_C=2A$ BD433/BD435 BD437			1.1 1.2	V
Transition frequency	f_T	$V_{CE}=1V, I_C=250mA$	3			MHz

⁽¹⁾Pulse test.

TO-126 Package Outline Dimensions

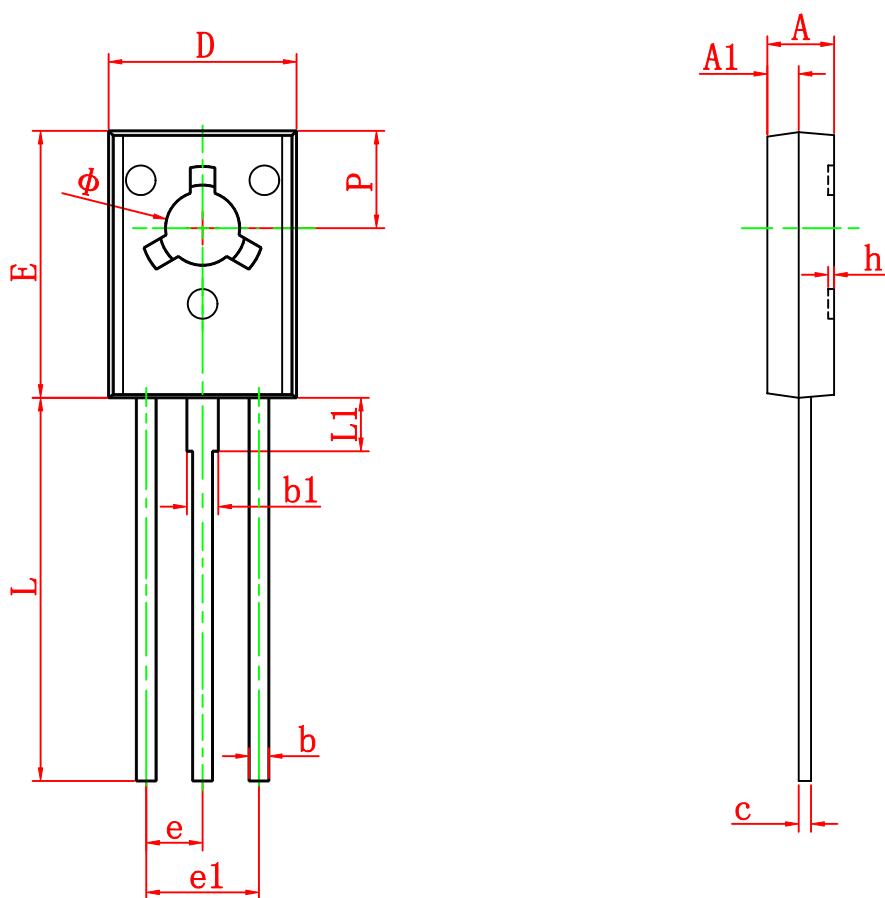

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	2.500	2.900	0.098	0.114
A1	1.100	1.500	0.043	0.059
b	0.660	0.860	0.026	0.034
b1	1.170	1.370	0.046	0.054
c	0.450	0.600	0.018	0.024
D	7.400	7.800	0.291	0.307
E	10.600	11.000	0.417	0.433
e	2.290 TYP		0.090 TYP	
e1	4.480	4.680	0.176	0.184
h	0.000	0.300	0.000	0.012
L	15.300	15.700	0.602	0.618
L1	2.100	2.300	0.083	0.091
P	3.900	4.100	0.154	0.161
Φ	3.000	3.200	0.118	0.126