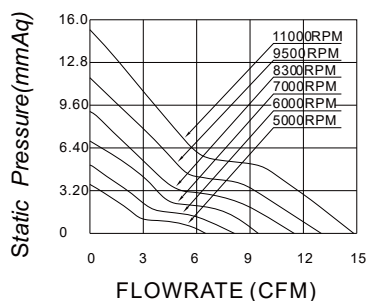
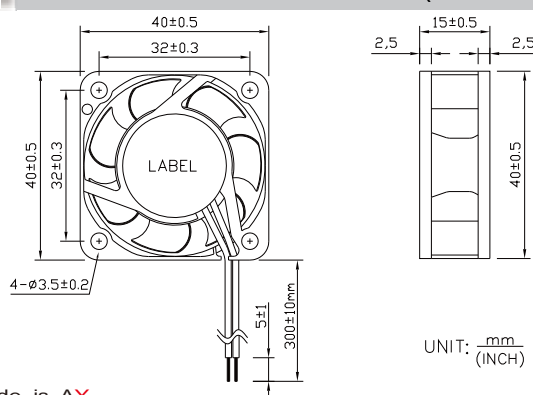


广州美嘉科技有限公司

c  US  RoHS**DC Brushless FAN
40x40x15mm-A Type**

轴承结构：双滚珠、含油、液压、其他
 Bearing: two ball、sleeve、HY、other
 框外材质: 塑胶(等级:UL94V-0)
 Frame:Plastic(Flammability:UL94V-0)
 扇叶材质:塑胶:(等级:UL94V-0)
 Impeller:Plastic:(Flammability:UL94V-0)
 风扇单重:25g(Weight:25g)

P@Q CURVE(AT RATEDVOLTAGE)**DIMENSIONS DRAWING(unit:mm)****编码规则 Code Rule**

例子 Example 12038H12B-1701
 12038H12X-AY

Model No. is 12038H12X; Extro P/N code is AY

X means bearing type, can be S(sleeve bearing), can be B(ball bearing), can be Y(HY bearing), can be SU(sleeve with UL), can be BU(ball with UL), can be YU(HY with UL)

Y means special function code, it will be used for a certain parts no. or client.

产品型号 12038H12X;附加代码 AY. X是一个不确定值,它代表了不同的轴承类型,

S(含油轴承), B(滚珠轴承), Y(液压轴承), SU(含油轴承带UL), BU(滚珠轴承带UL), YU(液压轴承带UL)

Y是一个不确定的值, 它代表不同特殊风机功能, 由具体客户或者料号来确定

Model	P/N Code	Rated Voltage	Operationg Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Noise
型号	P/N 附加码	额定电压	工作电压范围	额定电流	额定输入功率	转速	最大风量		最大风压		噪音
PART.NO.	AY	VDC	VDC	Amp	Watt	R.P.M	M³/min	CFM	mmH2O	InH2O	dB-A
MG4015L05X		5	1.8~3~6	0.15	0.75	5000	0.184	6.50	3.67	0.144	18.5
MG4015LM05X		5	1.8~3~6	0.22	1.10	6000	0.230	8.12	5.12	0.202	24.5
MG4015M05X		5	1.8~3~6	0.24	1.20	7000	0.268	9.46	6.92	0.272	28.5
MG4015H05X		5	1.8~3~6	0.32	1.60	8300	0.325	11.48	9.13	0.359	32.0
MG4015HH05X		5	1.8~3~6	0.38	1.90	9500	0.368	13.00	11.66	0.459	36.5
MG4015L12X		12	7.5~13.5	0.06	0.72	5000	0.184	6.50	3.67	0.144	18.5
MG4015LM12X		12	7.5~13.5	0.09	1.08	6000	0.230	8.12	5.12	0.202	24.5
MG4015M12X		12	7.5~13.5	0.10	1.20	7000	0.268	9.46	6.92	0.272	28.5
MG4015H12X		12	7.5~13.5	0.13	1.56	8300	0.325	11.48	9.13	0.359	32.0
MG4015HH12X		12	7.5~13.5	0.16	1.92	9500	0.368	13.00	11.66	0.459	36.5
MG4015VH12X		12	7.5~13.5	0.25	3.00	11000	0.420	14.83	15.26	0.601	41.5
MG4015L24X		24	18~26.5	0.05	1.20	5000	0.184	6.50	3.67	0.144	18.5
MG4015LM24X		24	18~26.5	0.06	1.44	6000	0.230	8.12	5.12	0.202	24.5
MG4015M24X		24	18~26.5	0.08	1.92	7000	0.268	9.46	6.92	0.272	28.5
MG4015H24X		24	18~26.5	0.09	2.16	8300	0.325	11.48	9.13	0.359	32.0
MG4015HH24X		24	18~26.5	0.10	2.40	9500	0.368	13.00	11.66	0.459	36.5
MG4015VH24X		24	18~26.5	0.12	2.88	11000	0.420	14.83	15.26	0.601	41.5