


DC Brushless FAN 120x120x38-B Type




轴承结构：双滚珠、含油、液压、其他
Bearing: two ball、sleeve、HY、other
框外材质: 塑胶(等级:UL94V-0)
Frame: Plastic(Flammability:UL94V-0)
扇叶材质: 塑胶:(等级:UL94V-0)
Impeller: Plastic:(Flammability:UL94V-0)
风扇单重: 302g (Weight: 302g)

P@Q CURVE (AT RATED VOLTAGE)

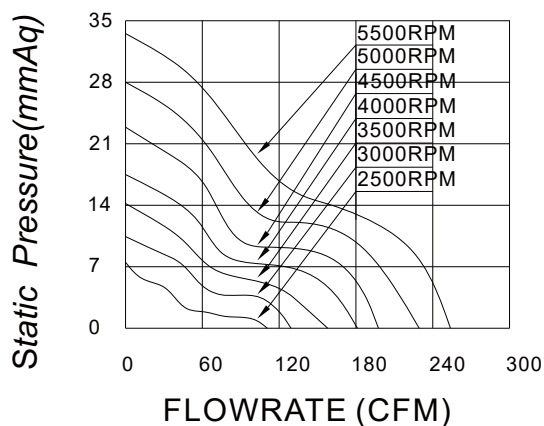

DIMENSIONS DRAWING (unit:mm)

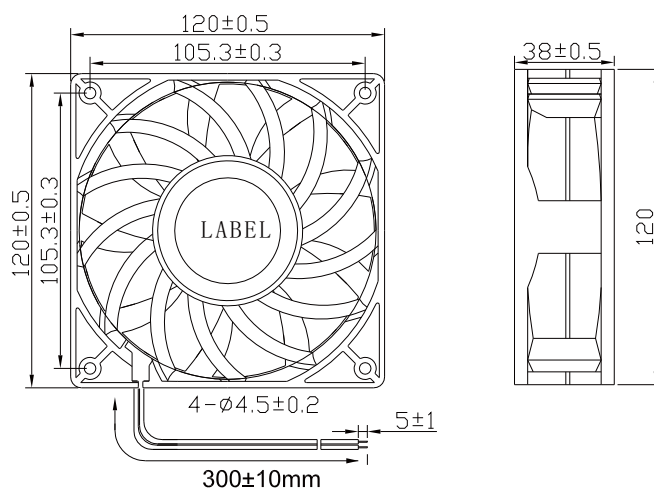

编码规则 Code Rule

例子 Example 12038H12B-1701
12038H12X-AY

Model No. is 12038H12X; Extno P/N code is AY

X means bearing type, can be S (sleeve bearing), can be B (ball bearing), can be Y (HY bearing), can be SU (sleeve with UL), can be BU (ball with UL), can be YU (HY with UL)

Y means special function code, it will be used for a certain parts no. or client.

产品型号 12038H12X; 附加代码 AY. X 是一个不确定值, 它代表了不同的轴承类型,

S (含油轴承), B (滚珠轴承), Y (液压轴承), SU (含油轴承带UL), BU (滚珠轴承带UL), YU (液压轴承带UL)

Y 是一个不确定的值, 它代表不同特殊风机功能, 由具体客户或者料号来确定

Model	P/N Code	Rated Voltage	Operationg Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Noise
型号	P/N 附加码	额定电压	工作电压范围	额定电流	额定输入功率	转速	最大风量		最大风压		噪音
PART.NO.		VDC	VDC	Amp	Watt	R.P.M	M³/min	CFM	mmH2O	InH2O	dB-A
MG12038L12X	BY	12	8~13.5	0.35	4.2	2500	3.067	108.28	7.16	0.282	52.4
MG12038M12X		12	8~13.5	0.85	10.2	3000	3.728	131.62	10.43	0.411	56.0
MG12038VM12X		12	8~13.5	1.38	16.6	3500	4.458	157.40	14.20	0.559	57.6
MG12038H12X		12	8~13.5	1.9	22.8	4000	5.092	179.80	18.15	0.715	62.4
MG12038HH12X		12	8~13.5	2.4	28.8	4500	5.686	200.78	22.96	0.904	66.7
MG12038VH12X		12	8~13.5	2.8	33.6	5000	6.389	225.59	28.02	1.103	69.8
MG12038HV12X		12	8~13.5	3.0	36.0	5500	7.037	248.46	33.14	1.305	71.9
MG12038L24X		24	18~26.5	0.175	4.2	2500	3.067	108.28	7.16	0.282	52.4
MG12038M24X		24	18~26.5	0.425	10.2	3000	3.728	131.62	10.43	0.411	56.0
MG12038VM24X		24	18~26.5	0.7	16.6	3500	4.458	157.40	14.20	0.559	57.6
MG12038H24X		24	18~26.5	0.95	22.8	4000	5.092	179.80	18.15	0.715	62.4
MG12038HH24X		24	18~26.5	1.2	28.8	4500	5.686	200.78	22.96	0.904	66.7
MG12038VH24X		24	18~26.5	1.4	33.6	5000	6.389	225.59	28.02	1.103	69.8

Model	P/N Code	Rated Voltage	Operations Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Noise
型号	P/N 附加码	额定电压	工作电压范围	额定电流	额定输入功率	转速	最大风量		最大风压		噪音
PART.NO.	BY	VDC	VDC	Amp	Watt	R.P.M	M³/min	CFM	mmH2O	InH2O	dB-A
MG12038HV24X		24	18~26.5	1.5	36.0	5500	7.037	248.46	33.14	1.305	71.9
MG12038L48X		48	36~54	0.09	4.2	2500	3.067	108.28	7.16	0.282	52.4
MG12038M48X		48	36~54	0.21	10.2	3000	3.728	131.62	10.43	0.411	56.0
MG12038VM48X		48	36~54	0.345	16.6	3500	4.458	157.40	14.20	0.559	57.6
MG12038H48X		48	36~54	0.475	22.8	4000	5.092	179.80	18.15	0.715	62.4
MG12038HH48X		48	36~54	0.6	28.8	4500	5.686	200.78	22.96	0.904	66.7
MG12038VH48X		48	36~54	0.7	33.6	5000	6.389	225.59	28.02	1.103	69.8
MG12038HV48X		48	36~54	0.75	36.0	5500	7.037	248.46	33.14	1.305	71.9