



Amphenol Global ID	Product Group	Product Type	Function	Additional Information	Color
2CMA167464R1000	Tough&Safe	463RAU6W	Panel mounted socket	3P+N+E	Red

Rated Current	Rated Voltage	Clock position	Frequency	Degree of Protection	Housing Material
63 A	200/346 - 240/415 V	6 h	50 Hz 60 Hz	IP67 IP69	Thermoplastic (PBT)

Cable Cross Section	Wire Size	ConnectionType	Mounting Holes	Plug Angle	Product Weight
6 - 25 mm ²	8 - 4 AWG	Screw	84x80	Angled	0.63 Kg

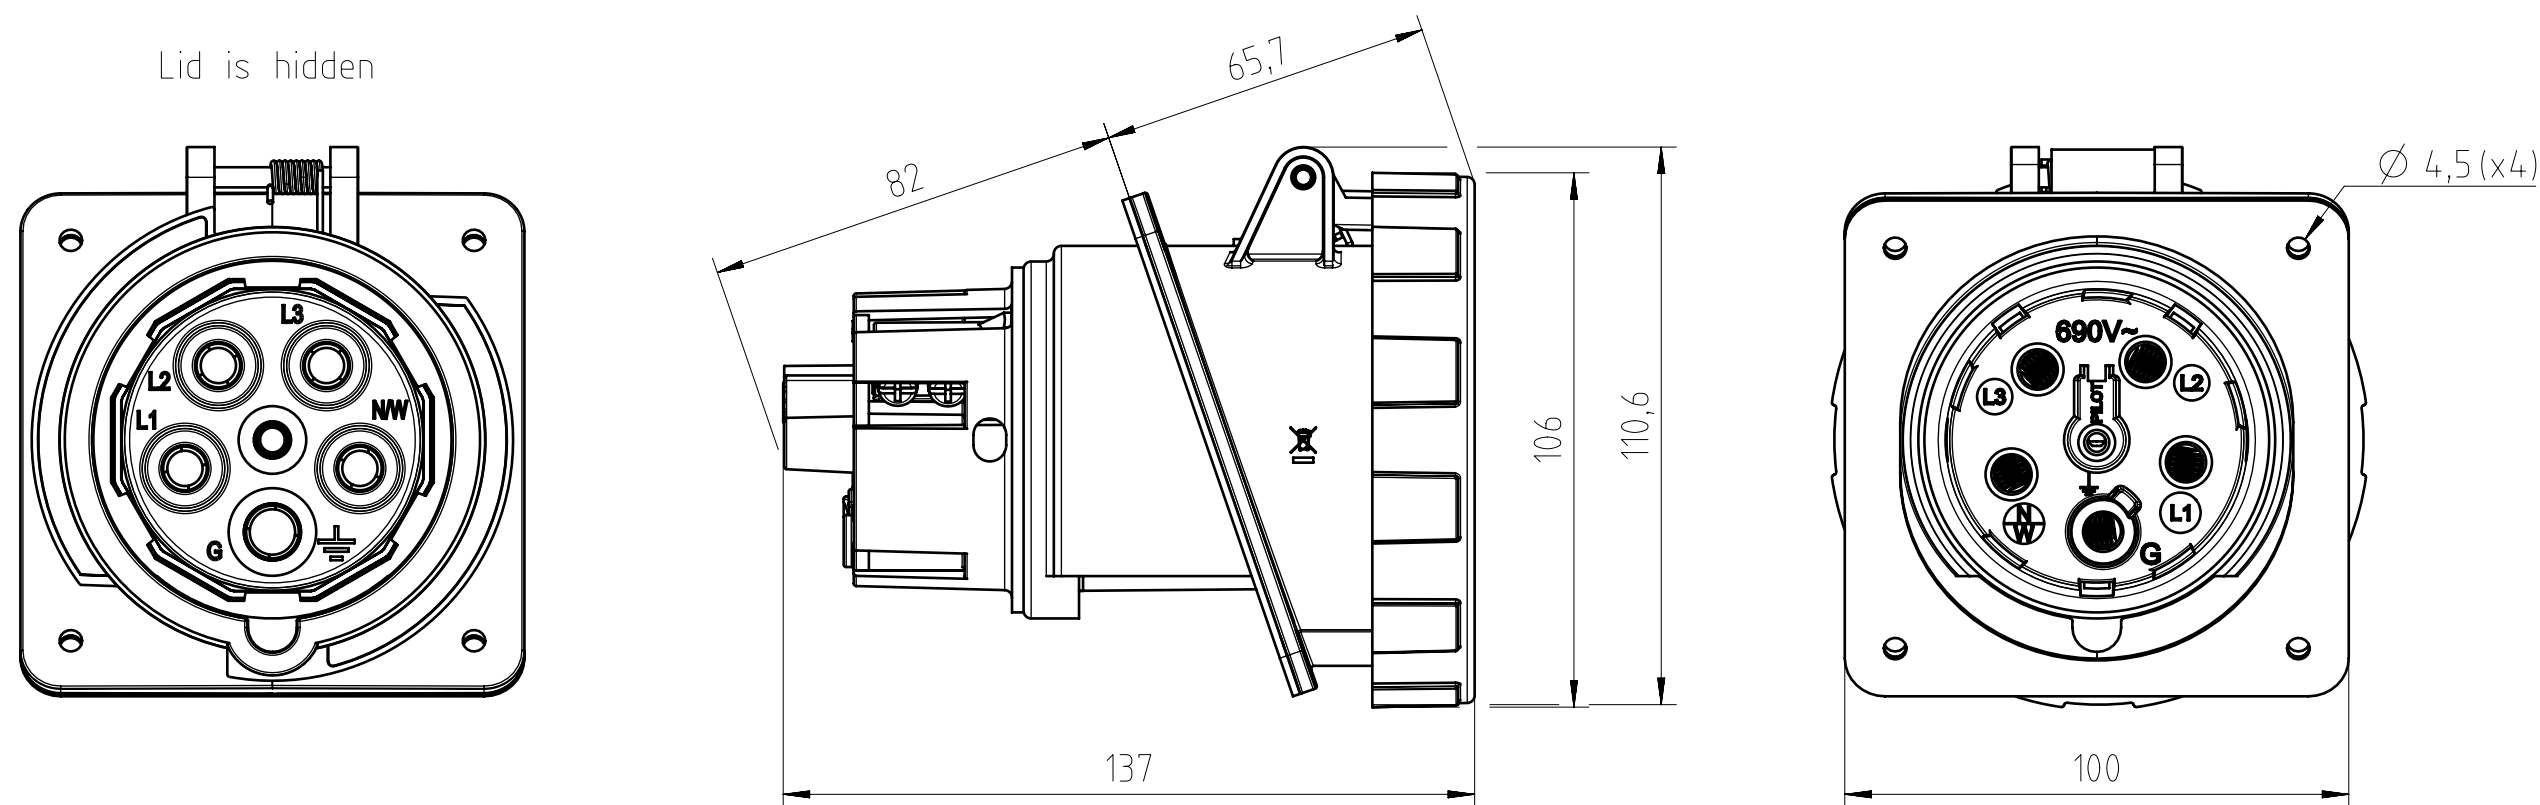

FOR REFERENCE - NOT TO SCALE

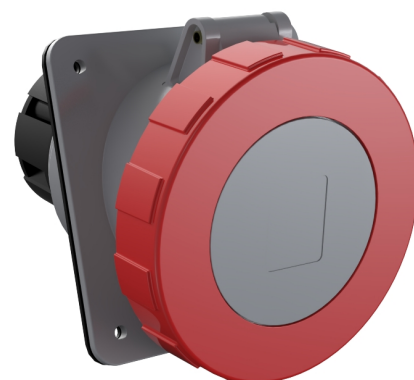

CE
IEC 60309

All dimensions are in mm.

Gewicht (errechnet) / Calc WT : 630 g				Zul. Abw./Tolerances : ISO 2768-m		Maßstab / Scale : 2:3		A3		
Prüfmaß / Testdimension						CUSTOMER DRAWING				
Teileindex / Partindexnumber:										
minor change:										
				Gez.	23.05.2025	463RAU6W Panel mounted socket				
				Drawn	WBENHASSINE					
				Status	Released					
				Gepr.	23.03.2026					
				Checked	HBENMANAA	M 2CMA167464R1000				
				Amphenol Tuchel Industrial GmbH						
01	202500075	19.03.2026	WBEN							
Index	Änderung/Description	Datum/Date	Name			Ers. f. / Replacement for :				
						Blatt/ Sheet 1				
						1 Bl.				