

# UL2651 PVC Flat Cable Flat Ribbon Cable 105°C 300V




## UL4384 FLAT RIBBON WIRE

File No.: E214500

Construction:

构造:

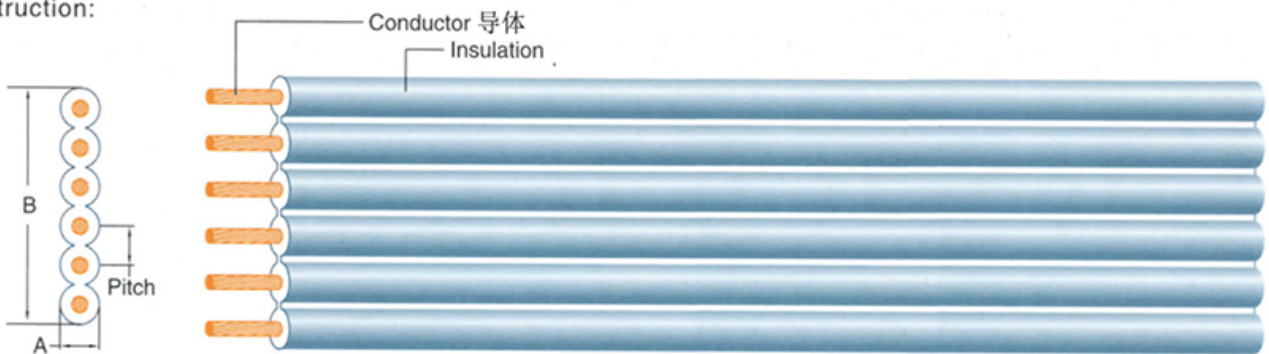

-- Tinned, annealed, stranded or solid copper conductor, Top-coated.

-- Rated temperature: 105°C.

-- Rated voltage: 300Volts.

-- Passes UL&CUL, HORIZONTAL flamt test.

Internal wiring of appliances Computers.

UL Style& CUL Type	AWG	Conductor attribute			Pitch	Cores	Insulation Thickness	Overall Diameter	Co Res
		attrib	mm	NO					
		ute			mm	mm	Ω/KM		
UL4384 CUL AWM I/A	24	7/0.20 or 11/0.16			2.54	2	0.38	1.5×4.0	
						3		1.5×6.5	
						4		1.5×9	
						5		1.5×11.5	
						6		1.5×14	

				7		1.5×16.5
				8		1.5×19
				9		1.5×21.5
				10		1.5×24
				11		1.5×26.5
				12		1.5×29
				13		1.5×31.5
				14		1.5×34
				15		1.5×36.5
				16		1.5×39
UL4384 CUL AWM I/A	26	7/0.16	1.5 or 1.4	2	0.38	1.4×2.9/2.8
				3		1.4×4.4/4.2
				4		1.4×5.9/5.0
				5		1.4×7.4/7.0
				6		1.4×8.9/8.4
				7		1.4×10.4/9.8
				8		1.4×11.9/11.2
				9		1.4×13.4/12.6
				10		1.4×14.9/14
				11		1.4×16.4/15.4
				12		1.4×17.9/16.8
				13		1.4×19.4/18.2
				14		1.4×20.9/19.6
				15		1.4×22.4/21
				UL4384 CUL AWM I/A		26
3	1.4×5.4					
4	1.4×7.4					
5	1.4×9.4					
6	1.4×11.4					
7	1.4×13.4					
8	1.4×15.4					
9	1.4×17.4					
10	1.4×19.4					
11	1.4×21.4					
12	1.4×23.4					
13	1.4×25.4					
14	1.4×27.4					
15	1.4×29.4					
16	1.4×31.4					
17	1.4×33.4					
UL4384 CUL AWM I/A	26	7/0.16	2.54	2	0.38	1.4×3.9
				3		1.4×6.4
				4		1.4×8.9
				5		1.4×11.4
				6		1.4×13.9
				7		1.4×16.4
				8		1.4×18.9
				9		1.4×21.4
				10		1.4×23.9
				11		1.4×26.4

---

				12		1.4×28.9	
				13		1.4×31.4	
				14		1.4×33.9	
				15		1.4×36.4	
				16		1.4×38.9	
				17		1.4×41.4	

Product

link :

<https://www.wenchangcable.com/ul2651-pvc-flat-cable-flat-ribbon-cable-105%E2%84%83-300v.html>