


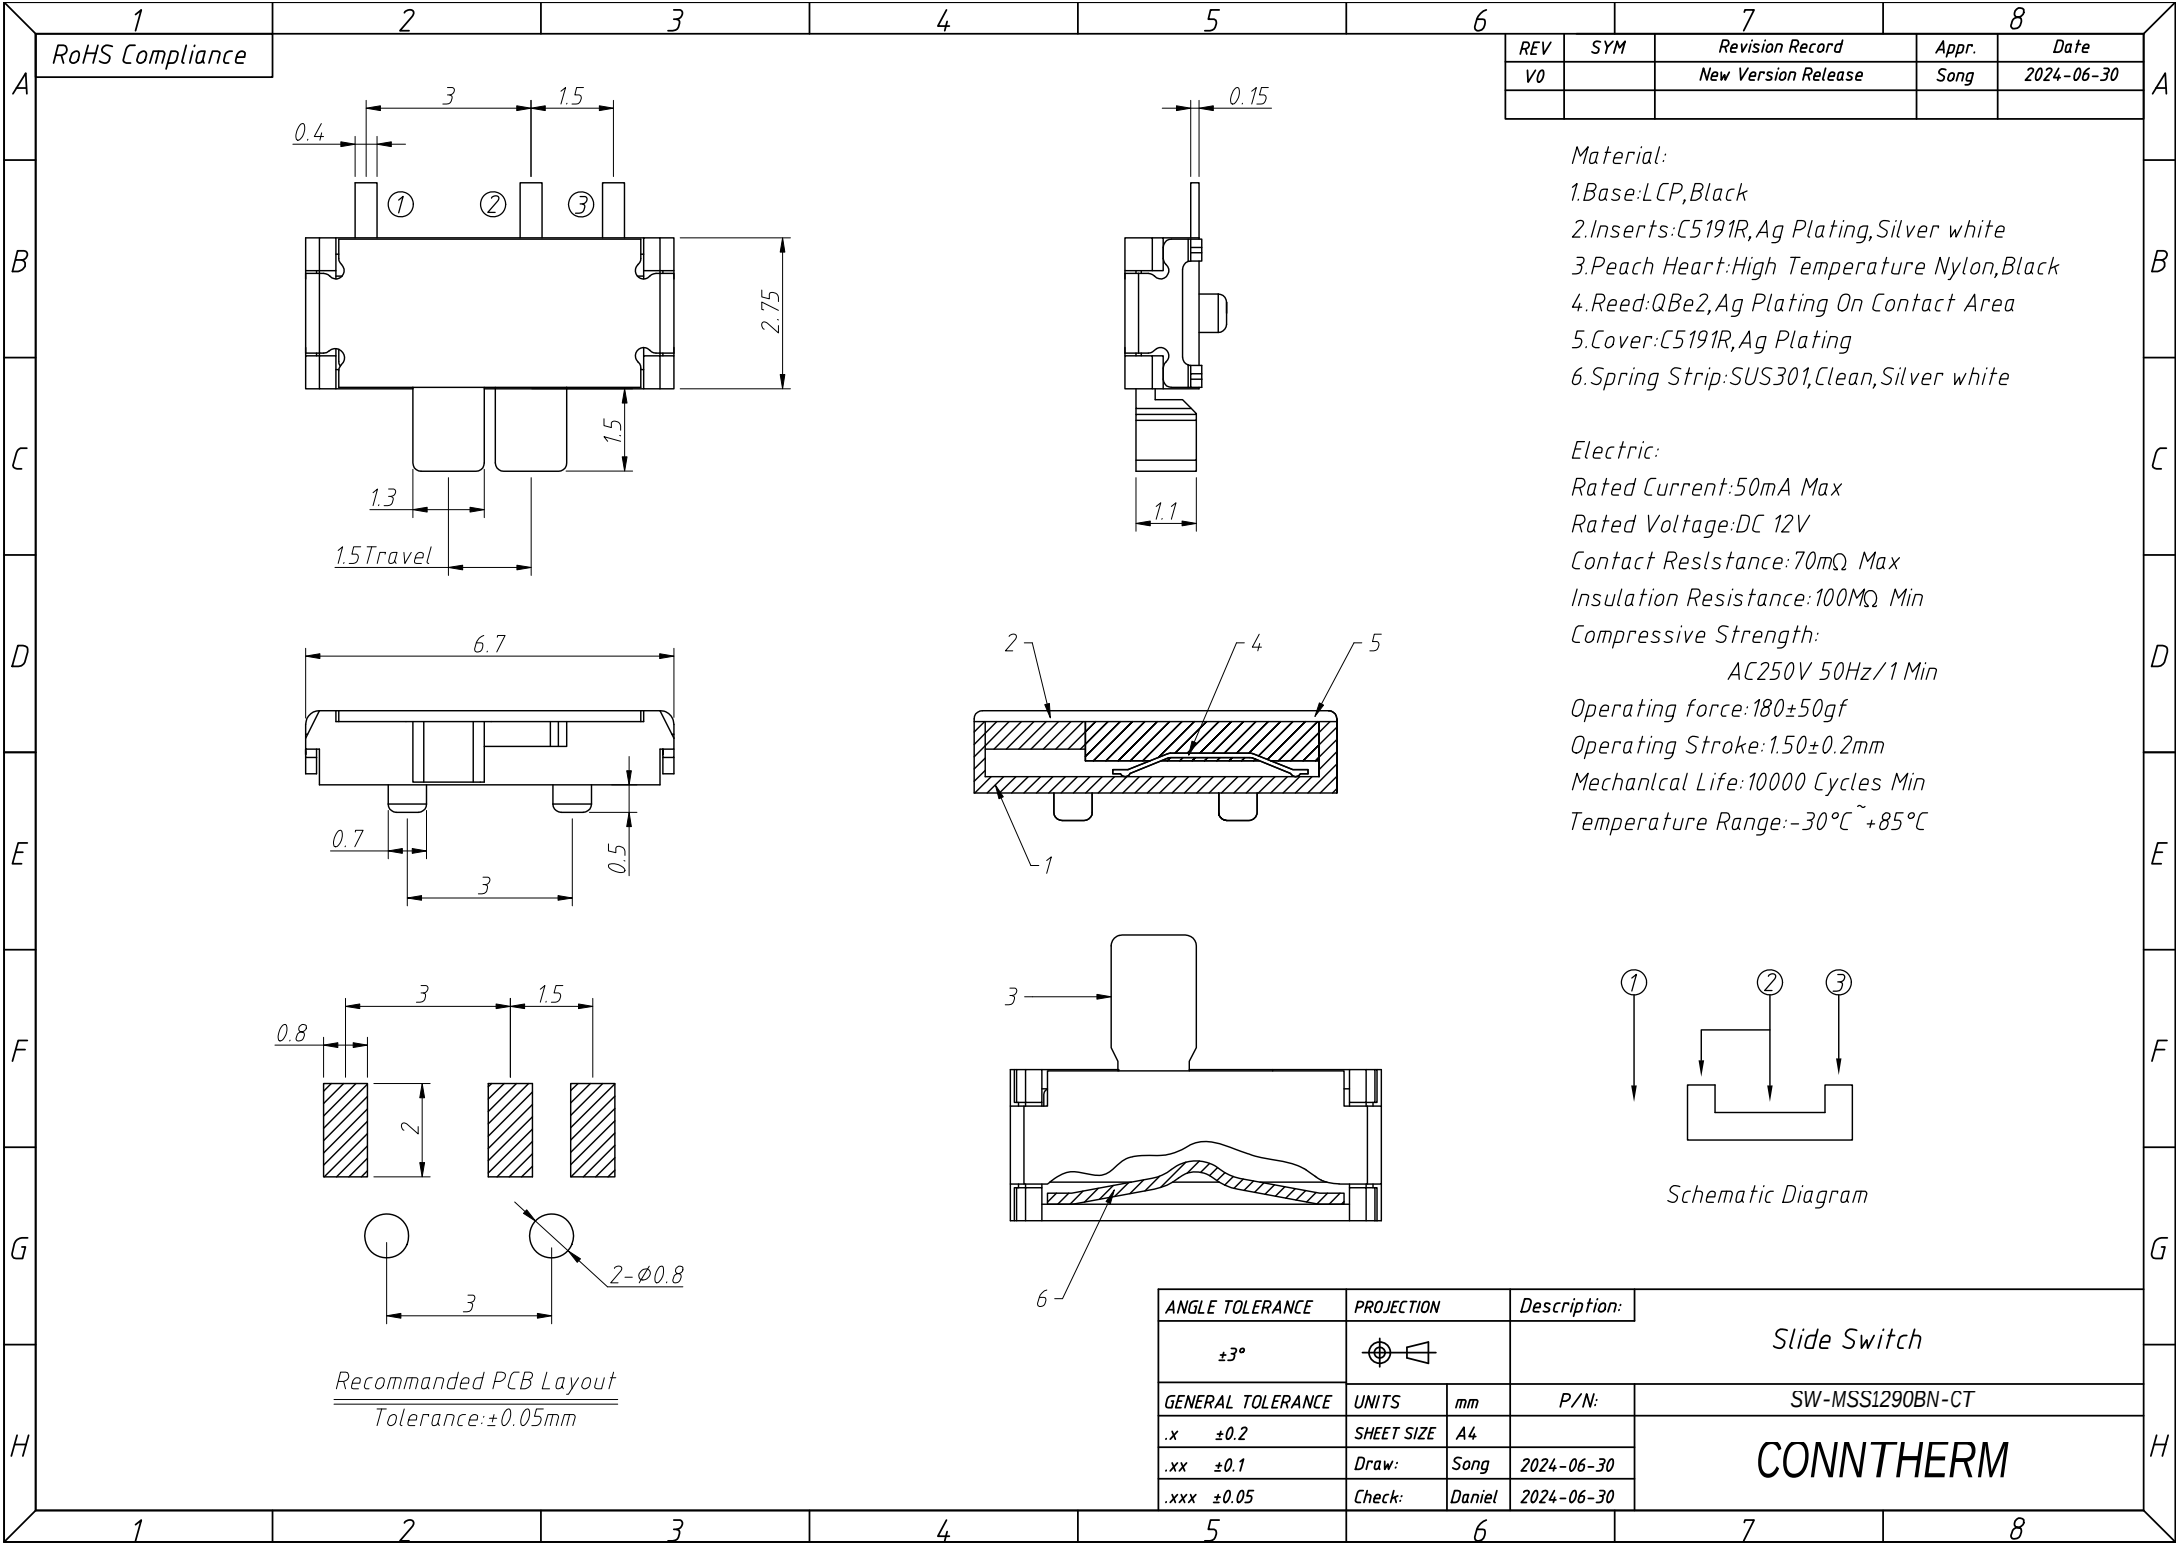

RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0		New Version Release	Song	2024-06-30

Material:

1.Base:LCP,Black
2.Inserts:C5191R,Ag Plating,Silver white
3.Peach Heart:High Temperature Nylon,Black
4.Reed:QBe2,Ag Plating On Contact Area
5.Cover:C5191R,Ag Plating
6.Spring Strip:SUS301,Clean,Silver white

Electric:

Rated Current:50mA Max
Rated Voltage:DC 12V
Contact Reslstance:70mΩ Max
Insulation Resistance:100MΩ Min
Compressive Strength:
AC250V 50Hz/1 Min
Operating force:180±50gf
Operating Stroke:1.50±0.2mm
Mechanical Life:10000 Cycles Min
Temperature Range:-30℃~+85℃

Recommended PCB Layout
Tolerance:±0.05mm

ANGLE TOLERANCE		PROJECTION	Description:	
±3°			Slide Switch	
GENERAL TOLERANCE		UNITS	mm	P/N:
.x	±0.2	SHEET SIZE	A4	
.xx	±0.1	Draw:	Song	2024-06-30
.xxx	±0.05	Check:	Daniel	2024-06-30

SW-MSS1290BN-CT

CONN THERM