

	Part name	Voice speaker40MM, 4R3W	Date	2026-01-17
	Part number	S-40-4R3W-CY03C	Edition	V1
	Department		Page	1 / 5

1.TEST CONDITION（测试条件）

Unless otherwise specified,The standard of range atmospheric conditions for making measurementsand tests as follows（无特定要求时如下述测试条件）：17°C~25°C，45%~85%RH，860HPA~1060HPA.

If there is no doubt about results,measurement shall be made with in the following limits.



（当判断有疑问的场合如下述测试条件）：20°C±3°C，60%~70%RH，860HPA~1060HPA.

2. SPECIFICATION OF SPEAKER MODE（喇叭模式规格）

2.1	Rated IMPEDANCE 额定阻抗	4Ω±15%	At 1.0KHz 0.89V
2.2	RESONANCE FREQUENCY 最低共振周波数	650±20%Hz	At 0.89V
2.3	Rated Power 额定功率	3.0W	At 346V
2.4	MAX POWER 最大功率	3.0W	At 3.46V
2.5	Outerput S.P.L 出力音压	97±3dB at 0.1W/0.1M	At 600.800.1000.1200.1500.2000Hz average
2.6	Frequency response curve 实效频宽	F0 ~ 20KHz	Deviation -10db from average S.P.L
2.7	Rattle & Buzz 异常音检查	should not be audible buzz and rattle (无异常声音)	Sine WAVE(正弦波入力) at 3.46V /350 ~ 2kHz
2.8	Dostortion 失真	≤5%THD	At 1kHz 0.1M/0.1W
2.9	Polarity 极性	When a positive D.C current is applied to the voice coil terminal marked +,the diaphragm shall move forward.(端子板的正极通入电 流，振膜向前运动)	
2.1	Magnet Size 磁铁	NdFeB (Φ12.5*1.5)	
2.11	Net Weight 重量	±10%	


	Part name	Voice speaker40MM, 4R3W	Date	2026-01-17
	Part number	S-40-4R3W-CY03C	Edition	V1
	Department		Page	2 / 5

3.ENVIRONMENTAL CHARACTERISTICS（信赖性试验）

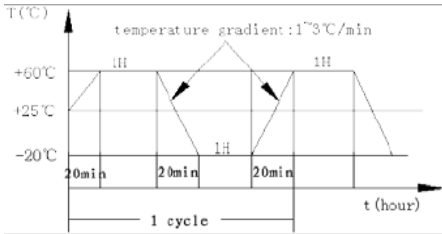
3.1	High temperature test 耐热试验	+ 60±3℃ duration48 hours ,then removal back to normal temperature for 2 hours（+60±3℃，48小时实验后，常温放置2小时）	
3.2	LOW temperature test 低温实验	- 25±3℃ duration 48 hours ,then removal back to normal temperature for 2 hours（-25±3℃，48小时实验后，常温放置2小时）	
3.3	Humidity test 耐湿试验	Temperature +40±3℃，relative humidity 90～95%, duration ,96 hours ,then removal back to normal temperature for 2 hours（温度+40±3℃，相对湿度90～95%，96小时实验后，常温放置2小时）	
3.4	Load test 连续负荷试验	The products shall not be no sound/Buzz&Rattle/different volume/exceptional diversification of frequency response curve in testing and after testing process for a continuous working of 96H at a rated 3.0W white noise 。 3.0W的白噪声下连续工作96小时,测试中和试验后不能出现任何无声/杂音/音量大小不均/频率响应曲线等异常变化。	
3.5	Temperature cycle test 温度周期试验	Temperature: -20℃to +60±3℃ Duration : 2 hours Cycl :2cycle 温度-20℃ 2小时转高温，+60℃±3℃ 2小时为一周期 共试验2周期	
3.6	Drop test 跌落试验	The speaker shall be dorp 5 times as shown in the figure and Cacophony must be normal （如图所示5次跌落实验后外 观和声音无异常）	
3.7	Insulation resistance 绝缘阻抗	A VOLTAGEOF 100V.d.c shall be applited for 1 min between a terminal and a frame ,after which measurement shall be made ,2MΩ OR MORE （D. C. 100V，1分钟后端子与支架间2MΩ以上）	
3.8	Vibration test 振动试验（捆包状态）	10-55Hz/min Amplitude: 1.5mm Duration: 2hours each axes	
3.9	Operating temperature 工作温度	- 25℃ TO+60℃	
3.10	Storage temperature 储存温度	- 30℃ TO+60℃	

	Part name	Voice speaker40MM, 4R3W	Date	2026-01-17
	Part number	S-40-4R3W-CY03C	Edition	V1
	Department		Page	3 / 5

4.MEASURING CIRCUIT (SPEAKER) 测试回路（喇叭模式）

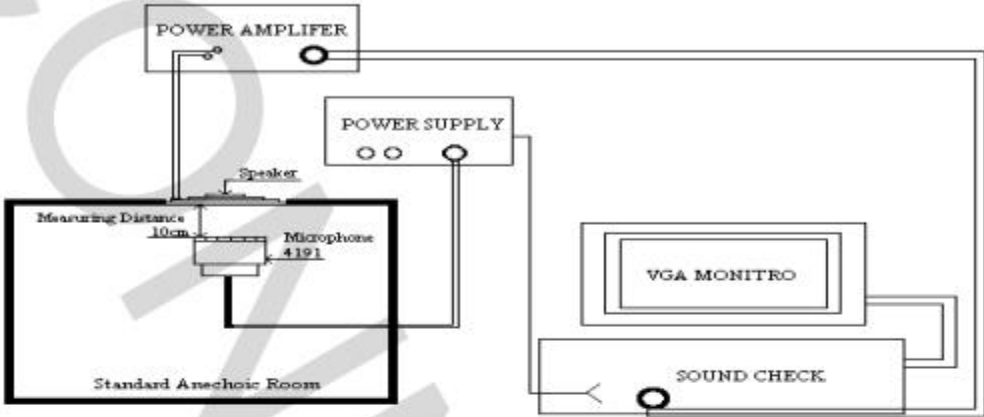


5.FREQUENCY CURVE (频响曲线图)

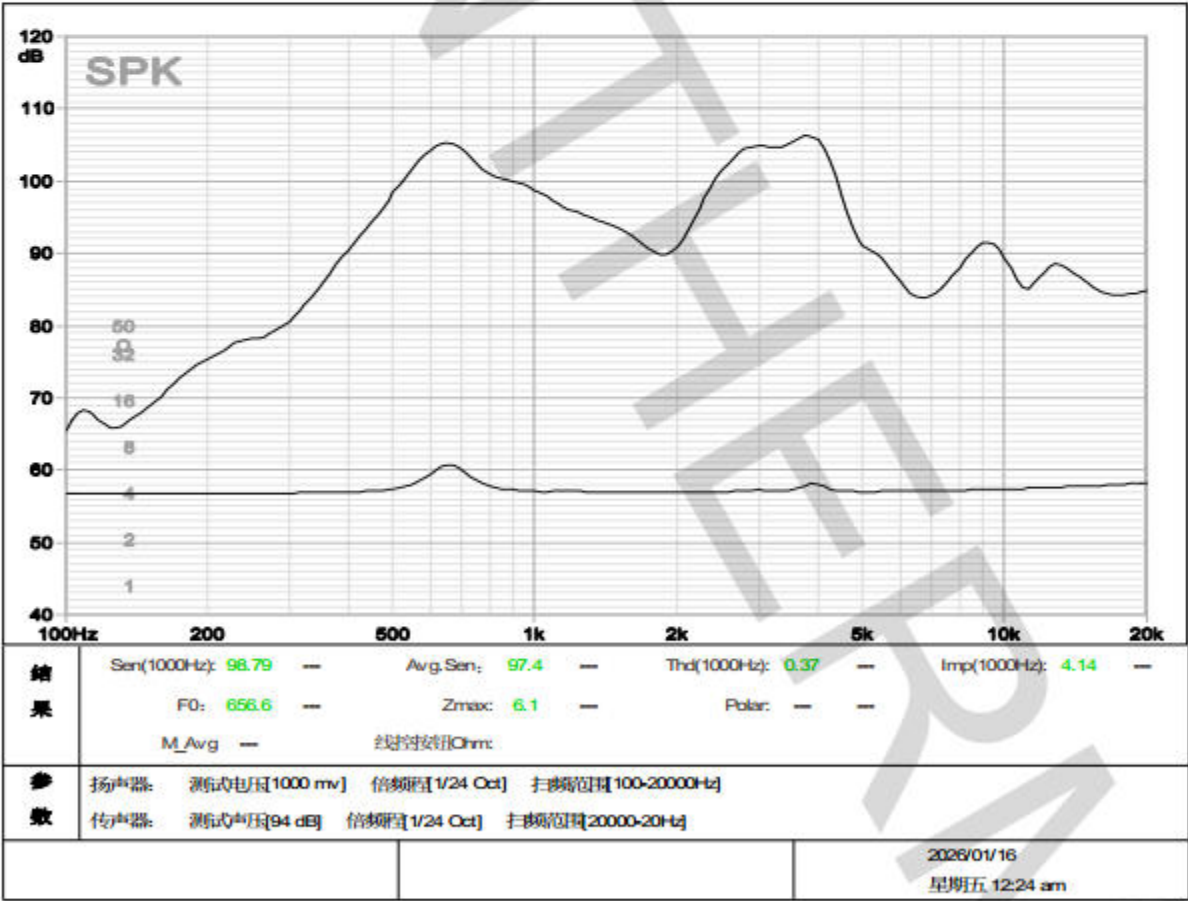

	Part name	Voice speaker40MM, 4R3W	Date	2026-01-17
	Part number	S-40-4R3W-CY03C	Edition	V1
	Department		Page	4 / 5

6.DIMENSIONS (尺寸)

Unless otherwise specified, tolerance: ± 0.3 (unit: mm)

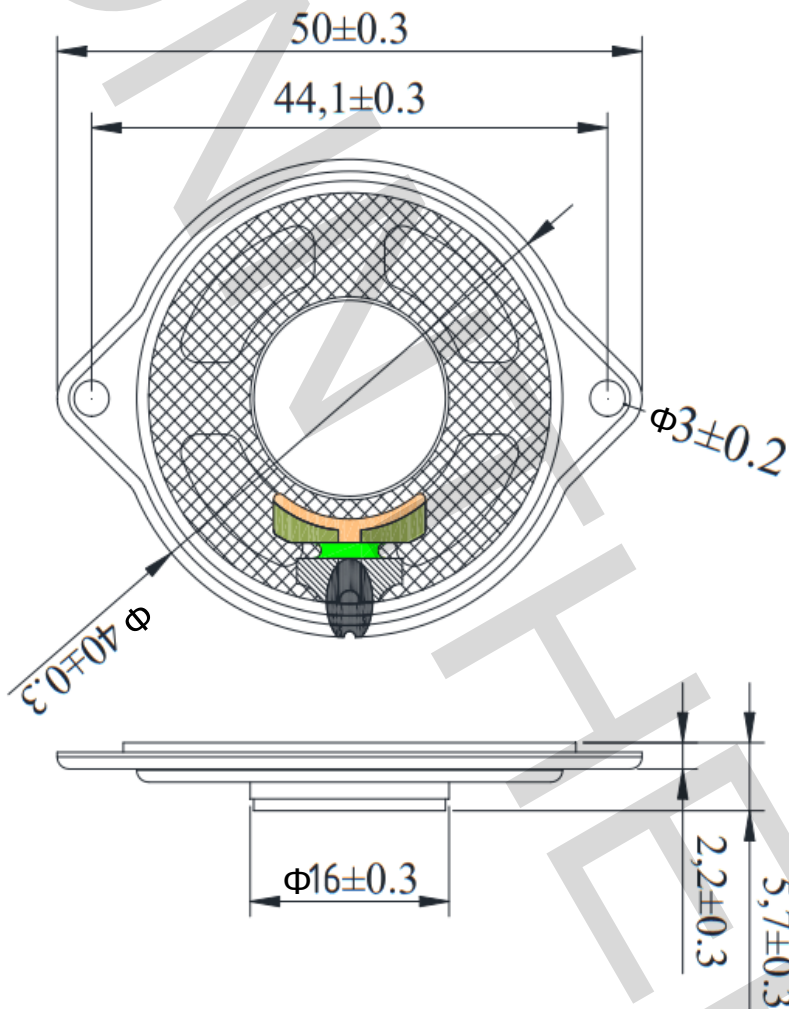

	Part name	Voice speaker40MM, 4R3W	Date	2026-01-17
	Part number	S-40-4R3W-CY03C	Edition	V1
	Department		Page	5 / 5

7.PACKAGING PARAMETERS（包装参数）

