





Amphenol PCD SZ
ORIGINAL
PDF Format
R&D

安费诺精密连接器(深圳)有限公司
Amphenol PCD Shenzhen

受控文件
2018年10月11日



SECTION A-A

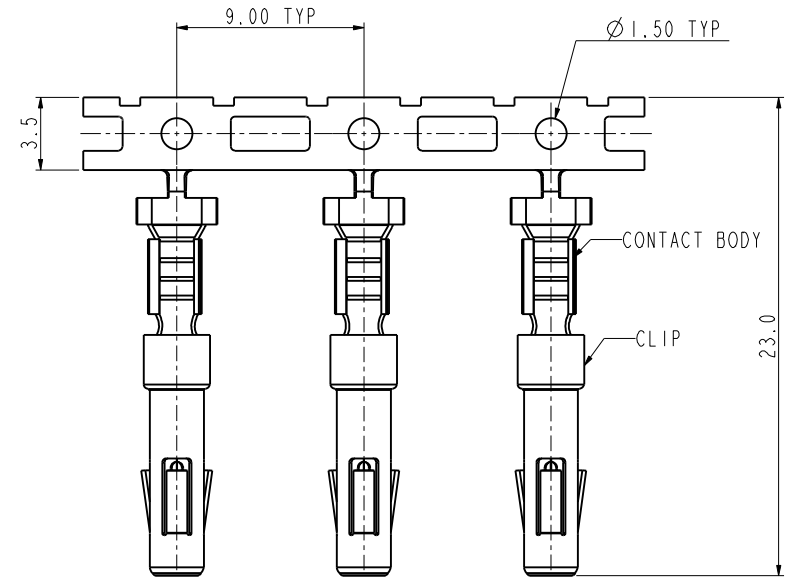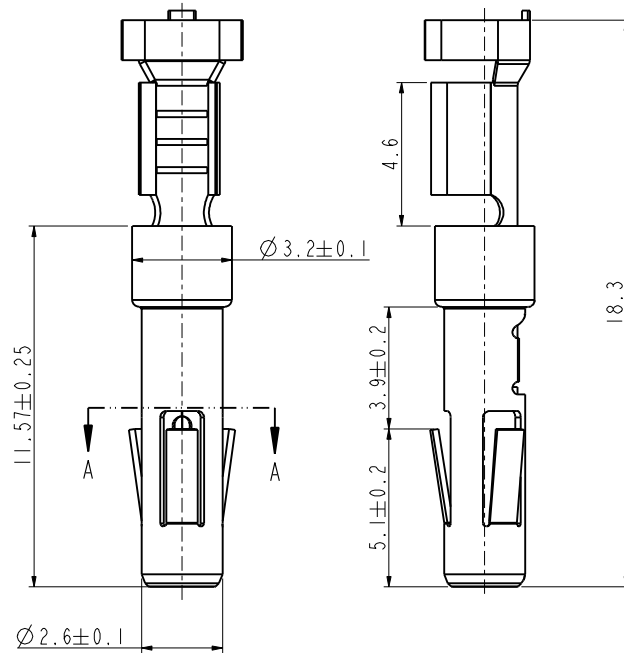

SCALE 4:1

✦: IS CRITICAL CHARACTERISTIC SYMBOL, ◎: IS IMPORTANT CHARACTERISTIC SYMBOL.
NOTES:

- ✦ 1. MATERIAL: CONTACT BODY: COPPER ALLOY; T=0.3mm,
CLIP: STAINLESS STEEL, T=0.15mm.
2. CONTACT BODY PLATING: TIN PLATING.
- ◎ 3. WIRE RANGE: 18~14AWG(0.75~2.0 SQ MM),
WIRE INSULATION OD RANGE: FROM 2.2MM TO 3.0MM.
- ✦ 4. ROHS COMPLIANCE.
5. REEL PACKING 3000PCS PER REEL.

DIMENSIONS		TOLERANCES		PROJECTION	TITLE					
ANSI Y14.5M		.X ±0.5			Amphenol Pcd Shenzhen					
UNITS: MM		.XX ±0.05			ENGR					
Pro/E FILE		ANGLES ±3.0°			LUIK.PENG Mar-23-18					
ORIGINAL		THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD SHENZHEN			CHKD	SIZE		DWG NO.		REV
					APPD	A3		C-LVRC16PC01S		A
					CODE: 58982		SCALE: 6:1	SHEET 1 OF 1		