
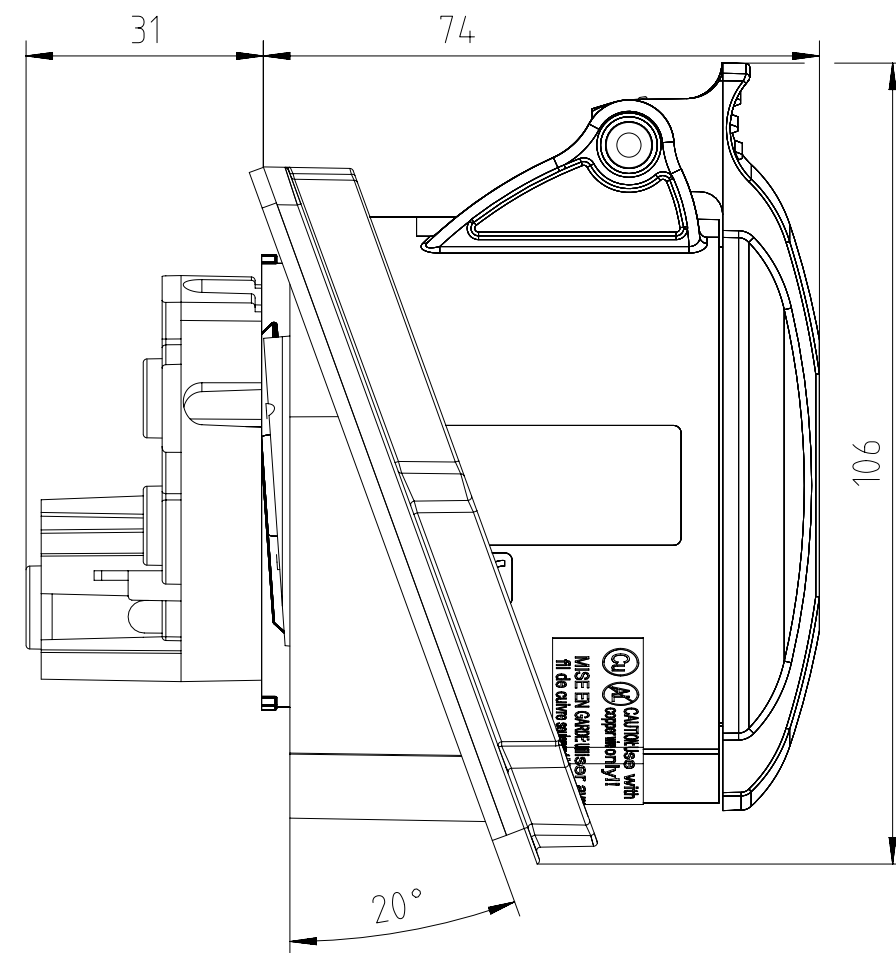


Amphenol Global ID	Product Group	Product Type	Function	Additional Information	Color
2CMA170044R1000	Easy&Safe	432RAM6	Panel mounted socket	3P+N+E	Red

Rated Current	Rated Voltage	Clock position	Frequency	Degree of Protection	Housing Material
32 A	200/346 - 240/415 V	6 h	50 Hz 60 Hz	IP44	Plastic (PA)

Cable Cross Section	Wire Size	ConnectionType	Mounting Holes	Plug Angle	Product Weight
2.5 - 10 mm ²	12 - 10 AWG	Screw	75x75	Angled	0.24 Kg

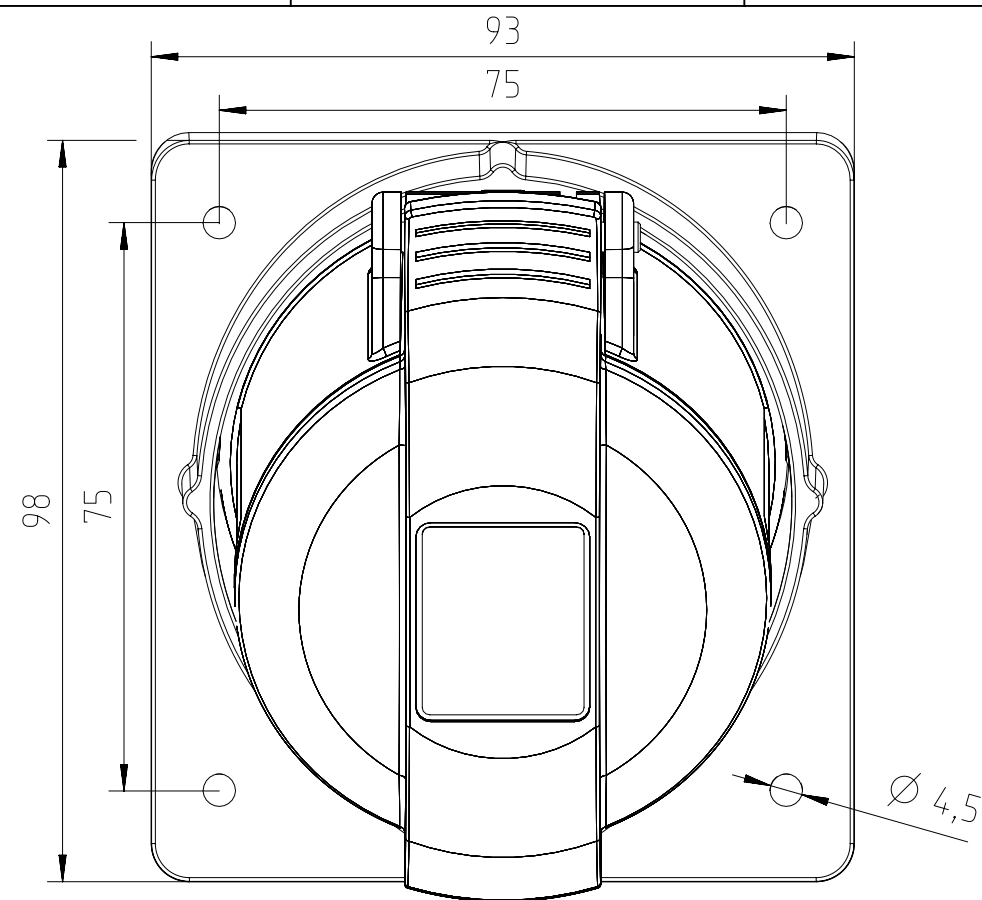

CE
IEC 60309

All dimensions are in mm.

Gewicht (errechnet) / Calc WT: 240 g				Zul. Abw./Tolerances :		Maßstab / Scale : 1:1		A3			
 Prüfmaß / Testdimension				ISO 2768-m		 DIN / ISO 13715		CUSTOMER DRAWING			
Teileindex / Partindexnumber:											
Bagatelle change:								432RAM6 Panel mounted socket Panel mounted socket			
				Gez.	08.12.2024						
				Drawn	WBNHASSINE						
				Status	Released						
				Gepr.	02.01.2025						
				Checked	MCARLE			M 2CMA170044R1000			
				Amphenol Tuchel Industrial GmbH							
01	202400052	10.12.2024	WBN						Blatt/ Sheet 1		
Index	Änderung/Description	Datum/Date	Name				Ers. f. / Replacement for :		1 Bl.		