



LED Modules MOD-2x12R147x46.2-JR5050CE are LED module based on the CREE LED[®] J Series[®] JR5050 E class optimized for cost effective and high efficacy applications and for LEDIL's STRADA IP 24 optics. LED Modules MOD-2x12R147x46.2-JR5050CE are providing optimized and easy integration, with excellent quality, reliability and precision.

A wide range of modules versions are available, offering the flexibility to choose the best combination of price and lumens output while maintaining consistent reliability and accuracy for a variety of applications.

For lighting applications where both high efficiency and durability are a priority, such as streets, squares, avenues, gardens and public spaces lighting.

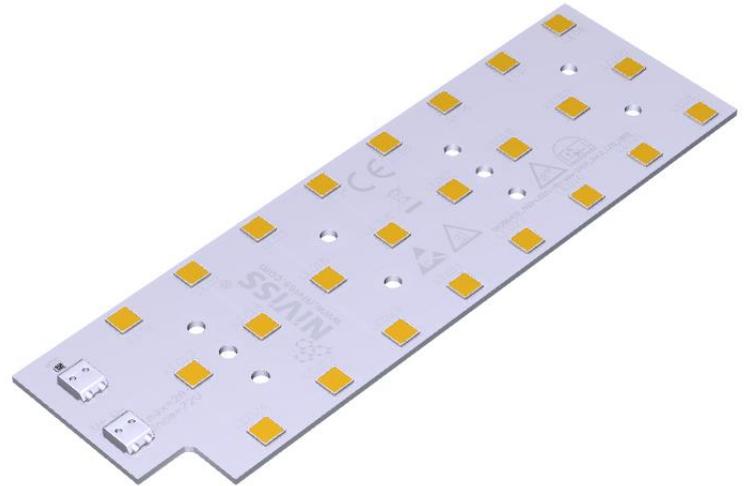

- High efficacy **207 lm/W** and up to **25577 lm**.
- LM-80 lifetime projections (IEC 62717) **> 87700 (L70)¹**
- Quick and effective heat dissipation due to the using MCPCB 1.0 mm with thermal conductivity 2.2 W/mK, or standard FR4 1.6mm, Lead Free HASL.
- EPREL registered product.
- Available CCT 2200K, 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.
- Available CRI 70, 80.

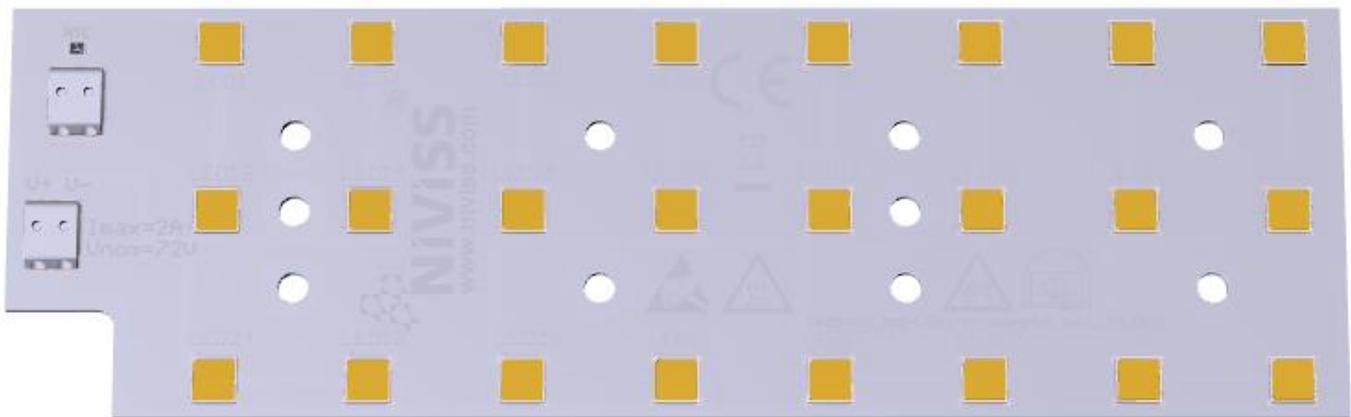

➤ **SPECIFICATION**

LED FAMILY	MOD-2x12R147x46.2-JR5050CE							
CCT/SDCM	2200K 3-STEP	2700K 3-STEP	3000K 3-STEP	3500K 3-STEP	4000K 3-STEP	5000K 3-STEP	5700K 3-STEP	6500K 3-STEP
Viewing Angle	120°							
Nominal Module Lumen Output ²	CRI 70							
	8776 lm	10093 lm	10647 lm	10739 lm	11086 lm	11086 lm	11086 lm	10901 lm
	CRI 80							
Nominal Efficacy ²	8083 lm	9423 lm	9792 lm	10069 lm	10347 lm	10347 lm	10347 lm	10231 lm
	CRI 70							
	164 lm/W	188 lm/W	199 lm/W	201 lm/W	207 lm/W	207 lm/W	207 lm/W	204 lm/W
CRI	CRI 80							
	151 lm/W	176 lm/W	183 lm/W	188 lm/W	193 lm/W	193 lm/W	193 lm/W	191 lm/W
Nominal Driving Current	70; 80							
Voltage DC (typ.) ²	800 mA							
Power Consumption ²	72 V							
Max. LED module working current ³	50.5 W							
Voltage DC (max) ³	2000 mA / module							
Max power ³	73.9 V							
Max. LED module lumen output ³	146 W							
	CRI 70							
	20248	23286	24564	24778	25577	25577	25577	25151
Number of LEDs	CRI 80							
	18650	21740	22593	23232	23872	23872	23872	23605
Power Supply Type	24							
Risk Group Classification ⁴	Constant Current							
Energy Class	RG-1 below 365 mA per LED, RG-2 Moderate Risk above 365 mA per LED							
	J class CRI 80							
	C	B	B	B	B	B	B	B
Operating Temperature	J class CRI 90							
	D	C	C	B	B	B	B	B
Tc max.	-30°C + +60°C							
Lifetime ¹ /Tc life	85°C							
	>60 000 h @ 55°C/85 °C, 400 mA							

¹ Lifetime of LEDs as declared by the manufacturer [CREE LED®](#) according to [IES LM-80-2015 Testing Results Revision:34 :2025](#).

² Source performance in real-life conditions at Tc=55°C, 800 mA without heatsink.

³ External heatsink required.

⁴ According to [Eye safety Cree document](#)

➤ **FEATURES**



Application:

- ❖ Task lighting
- ❖ Accent lighting
- ❖ Decorative lighting
- ❖ General lighting
- ❖ Road and park lighting
- ❖ Parking area lighting


Features:

- ❖ The module is dimmable by current set (0-100%)
- ❖ Long Lifetime
- ❖ Energy Saving


EPREL Database link

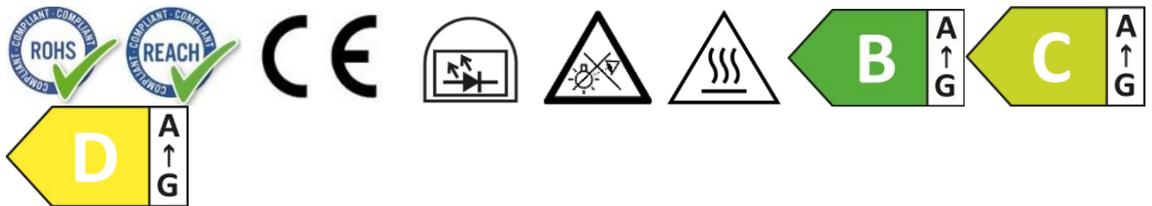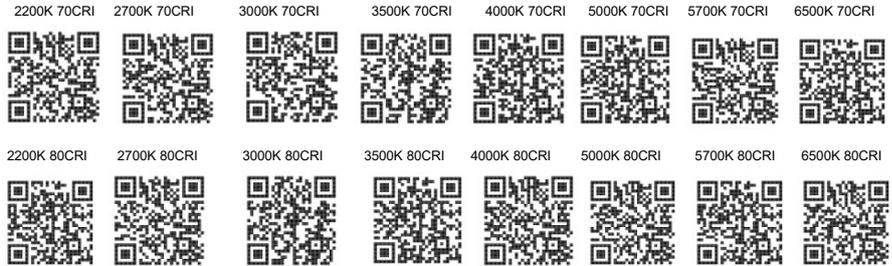


➤ **TYPICAL SPATIAL DISTRIBUTION**

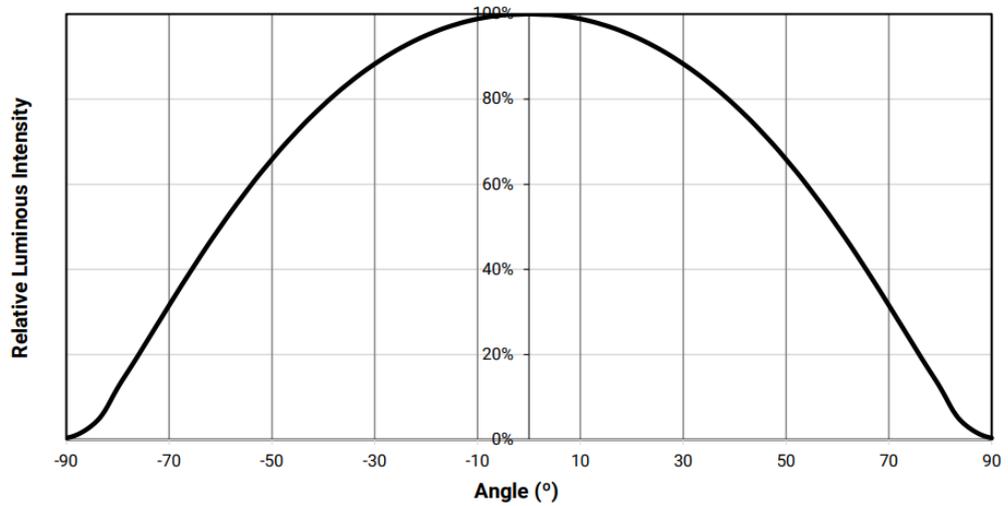


➤ **RELATIVE LUMINOUS FLUX VS. FORWARD CURRENT (mA)**

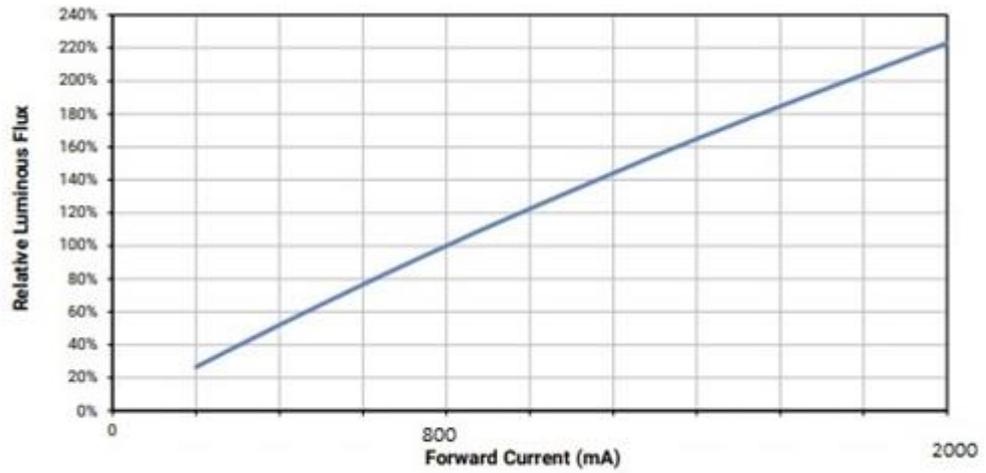


➤ **LUMINOUS EFFICACY (lm/W) VS. MODULE LED POWER (W)**

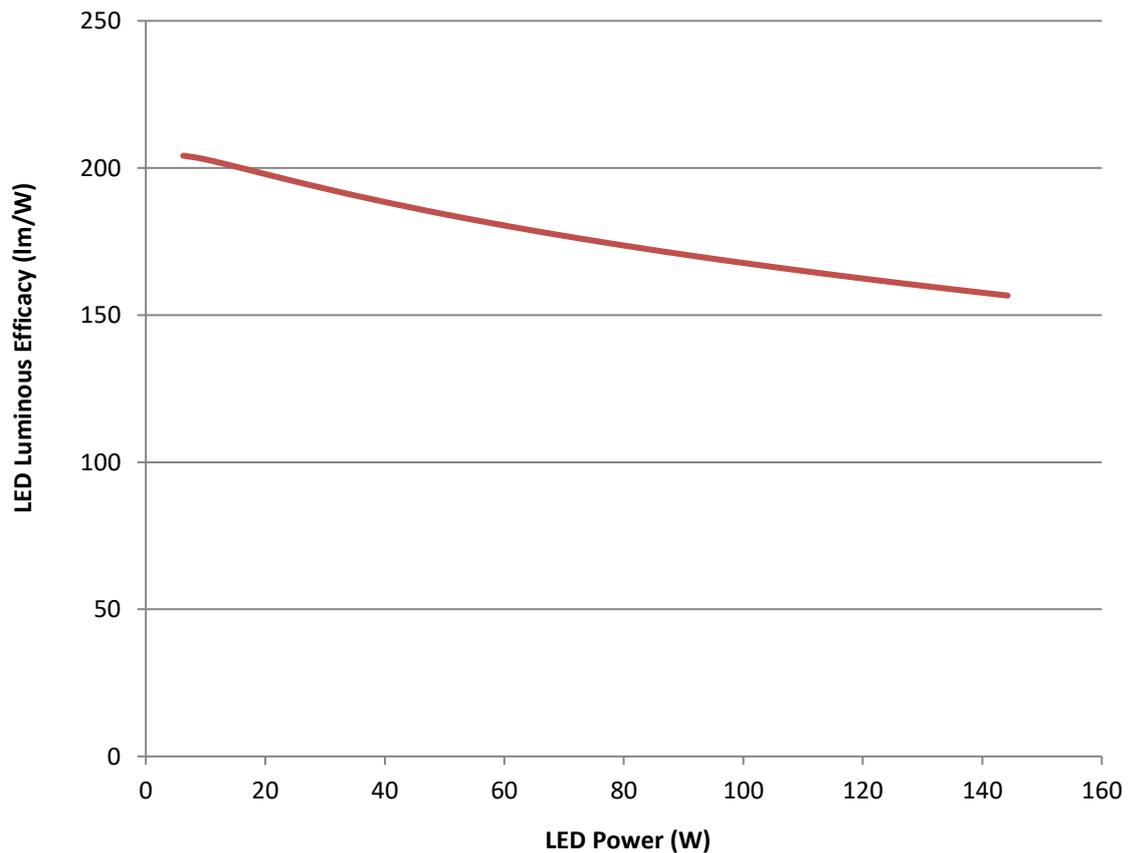


➤ **RELATIVE LUMINOUS FLUX VS. JUNCTION TEMPERATURE**

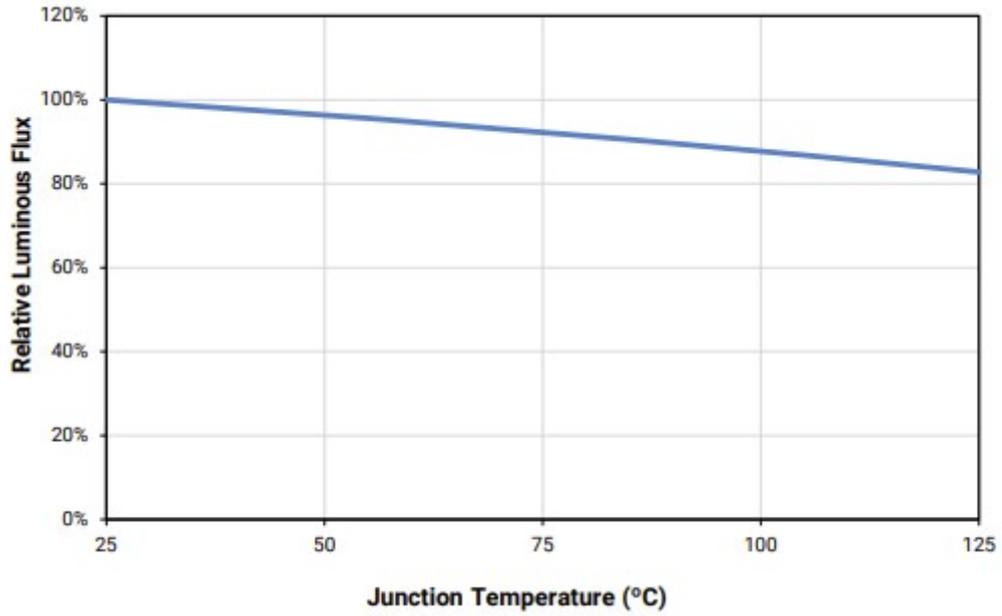


➤ **RELATIVE CHROMATICITY VS. TEMPERATURE**

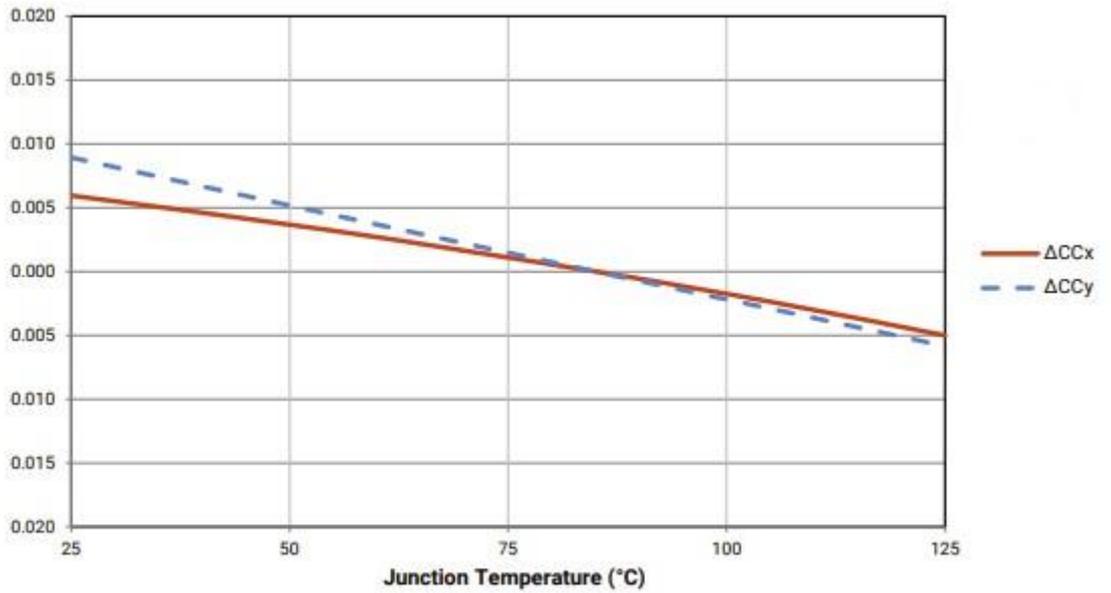

➤ RELATIVE CHROMATICITY VS. CURRENT

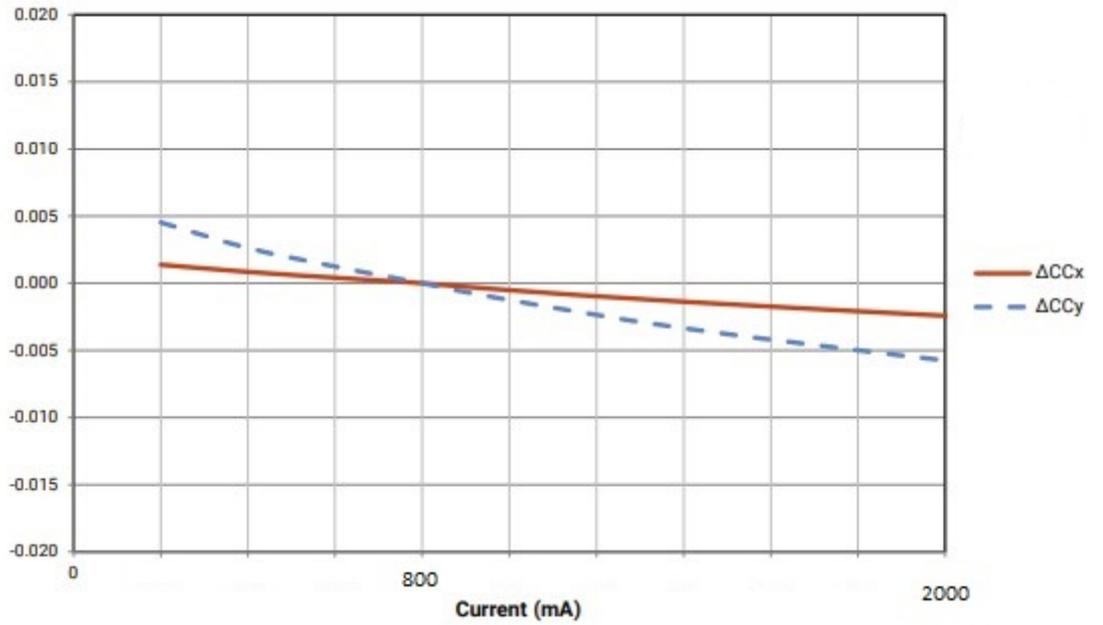

➤ **DIMENSIONS**

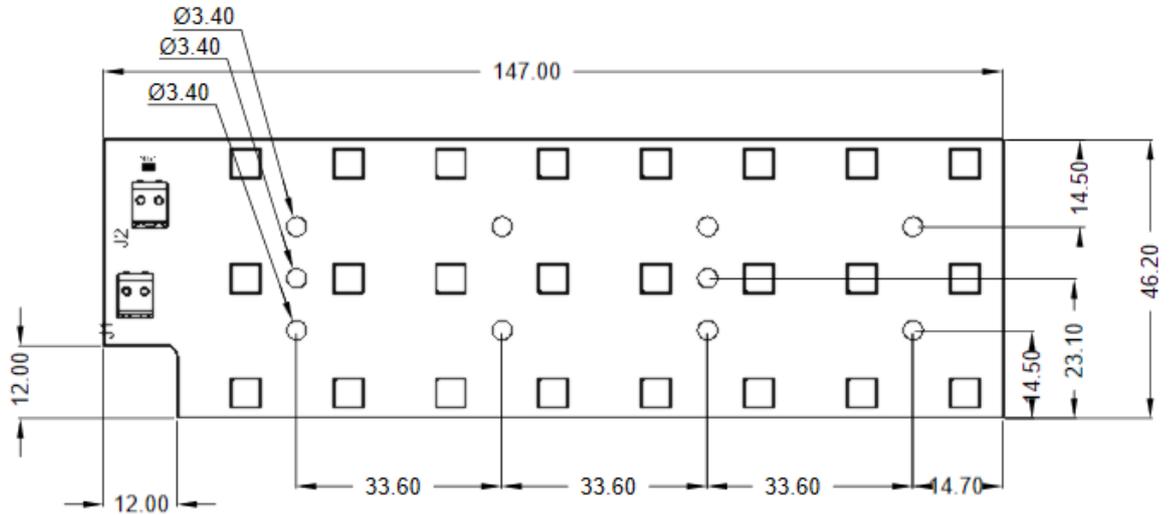

Notes:
Drawing is not to scale.
All dimensions are in millimeters.

MECHANICAL SPECIFICATION		
Dimensions	147 x 46.2 mm	
Board Thickness	1.0 mm	1.6 mm
Board Material	MCPCB, 5052 Alloy, 2.2W/(m²K); high reflectivity white soldermask	FR4; high reflectivity white soldermask
Shape	Rectangular	


➤ **CONNECTION**




Inserting solid conductors via push-in termination.

Easy conductor removal, e.g., via 206-859 operating tool.

➤ **ELECTRICAL SCHEMA**

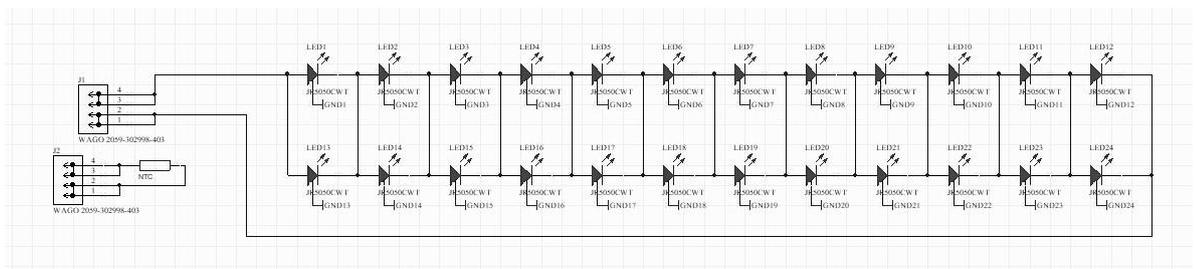

➤ **ELECTRICAL INSTALLATION**

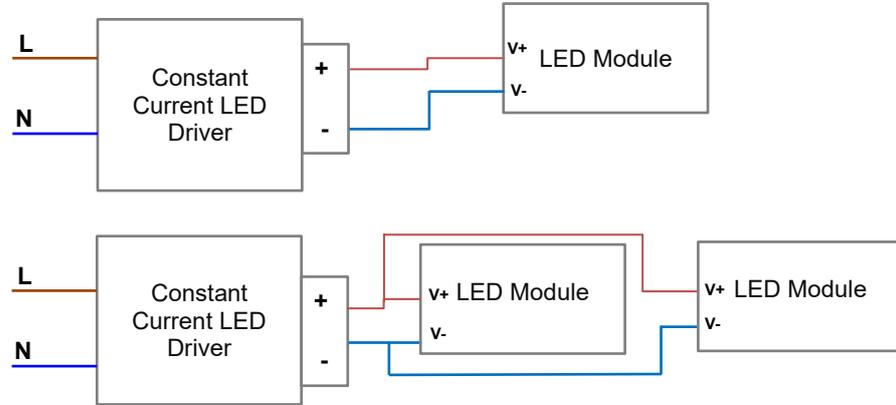

➤ **ORDERING CODE**

ORDERING CODE / ARTICLE CODE	DESCRIPTION
MOD-2x12R147x46.2-JR5050CE-2270-VA01	LED Module 147x46.2 mm, High Efficacy, High Reflectivity White Soldermask, 24 LED, JR5050C class E, 2200K, CRI 70, 1.0 mm MCPCB
MOD-2x12R147x46.2-JR5050CE-2770-VA01	LED Module 147x46.2 mm, High Efficacy, High Reflectivity White Soldermask, 24 LED, JR5050C class E, 2700K, CRI 70, 1.0 mm MCPCB
MOD-2x12R147x46.2-JR5050CE-3070-VA01	LED Module 147x46.2 mm, High Efficacy, High Reflectivity White Soldermask, 24 LED, JR5050C class E, 3000K, CRI 70, 1.0 mm MCPCB
MOD-2x12R147x46.2-JR5050CE-3570-VA01	LED Module 147x46.2 mm, High Efficacy, High Reflectivity White Soldermask, 24 LED, JR5050C class E, 3500K, CRI 70, 1.0 mm MCPCB
MOD-2x12R147x46.2-JR5050CE-4070-VA01	LED Module 147x46.2 mm, High Efficacy, High Reflectivity White Soldermask, 24 LED, JR5050C class E, 4000K, CRI 70, 1.0 mm MCPCB
MOD-2x12R147x46.2-JR5050CE-5070-VA01	LED Module 147x46.2 mm, High Efficacy, High Reflectivity White Soldermask, 24 LED, JR5050C class E, 5000K, CRI 70, 1.6 mm MCPCB
MOD-2x12R147x46.2-JR5050CE-5770-VA01	LED Module 147x46.2 mm, High Efficacy, High Reflectivity White Soldermask, 24 LED, JR5050C class E, 5700K, CRI 70, 1.6 mm MCPCB
MOD-2x12R147x46.2-JR5050CE-6570-VA01	LED Module 147x46.2 mm, High Efficacy, High Reflectivity White Soldermask, 24 LED, JR5050C class E, 6500K, CRI 70, 1.6 mm MCPCB
MOD-2x12R147x46.2-JR5050CE-2280-VA01	LED Module 147x46.2 mm, High Efficacy, High Reflectivity White Soldermask, 24 LED, JR5050C class E, 2200K, CRI 80, 1.6 mm MCPCB
MOD-2x12R147x46.2-JR5050CE-2780-VA01	LED Module 147x46.2 mm, High Efficacy, High Reflectivity White Soldermask, 24 LED, JR5050C class E, 2700K, CRI 80, 1.6 mm MCPCB
MOD-2x12R147x46.2-JR5050CE-3080-VA01	LED Module 147x46.2 mm, High Efficacy, High Reflectivity White Soldermask, 24 LED, JR5050C class E, 3000K, CRI 80, 1.0 mm MCPCB
MOD-2x12R147x46.2-JR5050CE-3580-VA01	LED Module 147x46.2 mm, High Efficacy, High Reflectivity White Soldermask, 24 LED, JR5050C class E, 3500K, CRI 80, 1.0 mm MCPCB
MOD-2x12R147x46.2-JR5050CE-4080-VA01	LED Module 147x46.2 mm, High Efficacy, High Reflectivity White Soldermask, 24 LED, JR5050C class E, 4000K, CRI 80, 1.0 mm MCPCB
MOD-2x12R147x46.2-JR5050CE-5080-VA01	LED Module 147x46.2 mm, High Efficacy, High Reflectivity White Soldermask, 24 LED, JR5050C class E, 5000K, CRI 80, 1.0 mm MCPCB
MOD-2x12R147x46.2-JR5050CE-5780-VA01	LED Module 147x46.2 mm, High Efficacy, High Reflectivity White Soldermask, 24 LED, JR5050C class E, 5700K, CRI 80, 1.0 mm MCPCB
MOD-2x12R147x46.2-JR5050CE-6580-VA01	LED Module 147x46.2 mm, High Efficacy, High Reflectivity White Soldermask, 24 LED, JR5050C class E, 6500K, CRI 80, 1.6 mm MCPCB

➤ **COMMERCIAL INFORMATION**

COMMERCIAL INFORMATION	
Connector	WAGO 2059
Available Lenses	LEDIL STRADA-IP-24
Minimum Order Quantity	10 pcs.
Warranty	2 years
Power Supply	PS-ELG-200-C2100B PS-LCM-40DA Xi FP 75W 0.3-1.0A SNLDAE

➤ **GENERAL TERMS OF USE**

1. The range of acceptable input voltages must include the expected voltage dropout across the LED string check on CREE LED [Website J Series[®] 5050C](#)
2. Connecting to the power supply should be done when the power supply is off.
3. Modules should be connected to heatsink to dissipate heat from LED module. Temperature on the module shouldn't be higher than recommended by Cree[®]. Due to power of the module, appropriate heatsink should be used with thermal conductive tape or paste. The lower temperature on LED module causes longer lifetime.
4. During installation of the LED module it is absolutely necessary to use ESD protection. Luminaire design should protect the module from ESD. Installation of the LED module should be done by qualified person.
5. Lenses, diodes and other components on the module must be protected against mechanical damage and exposure to liquids and dirt.
6. The modules shouldn't have contact with hazardous and corrosive substances or aromatic organic compounds such as toluene, acetone, xylene, benzene.
7. For installation of modules use substances recommended and tested by the CREE LED[®]. List of substances available on the manufacturer's website: cree-led.com

**Niviss is not responsible for any damage or failure due to not comply with above rules.
Otherwise, the complaint will not be taken into account.**

➤ **ENVIRONMENTAL CAUTION**



Caution!

It is prohibited to dispose of obsolete and waste electrical and electronic equipment together with regular household wastes. They should be properly sorted and recycled. Old electrical and electronic equipment should be returned to a waste collection point established by a waste-management service. Waste electrical and electronic equipment can be broken down to base materials and then recycled. For more information regarding waste management please contact your local authorities, waste-management service or the seller of electrical and electronic devices.

➤ **DATA DOWNLOAD**

- [3D PDF FILE](#)
- [STEP FILE](#)
- [EU DECLARATION OF CONFORMITY \(CE\)](#)