



Amphenol Global ID	Product Group	Product Type	Function	Additional Information	Color
2CMA100585R1000	Tough&Safe	ABB416P6W	Plug	3P+E	Red
Rated Current	Rated Voltage	Clock position	Frequency	Degree of Protection	Housing Material
16A 20A	380 - 415 V	6 h	50 Hz 60 Hz	IP67 IP69	Thermoplastic (PBT)
Cable Cross Section	Wire Size	ConnectionType	Mounting Holes	Plug Angle	Product Weight
1 - 4 mm ²	14 - 12 AWG	Screw		Straight	0,24 Kg

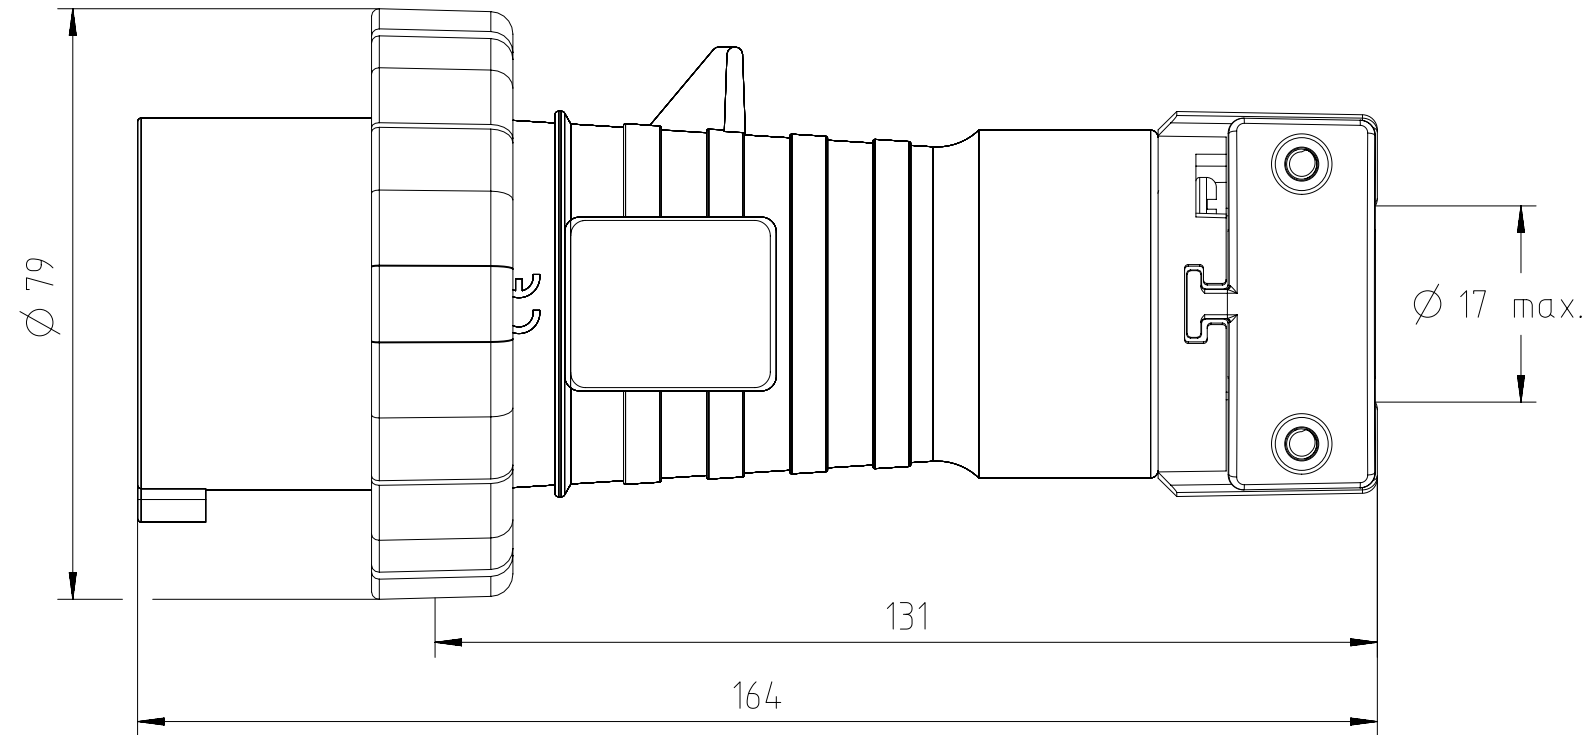

All dimensions are in mm.

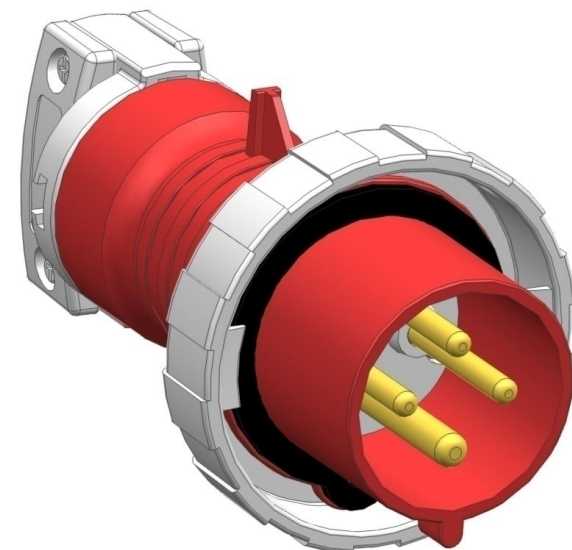

Gewicht (errechnet) / Calc WT: 240 g				Zul. Abw./Tolerances:		Maßstab / Scale: 1:1		A3			
Prüfmaß / Testdimension						CUSTOMER DRAWING					
Teileindex / Partindexnumber:				ISO 2768-m							
minor change:											
				Gez.	19.08.2024		ABB416P6W Industrial Plug				
				Drawn	WBENHASSINE						
				Status	Released						
				Gepr.	13.02.2025						
				Checked	HBENMANAA		M 2CMA100585R1000				
				Amphenol Tuchel Industrial GmbH							
01	2024-00052	19.09.2025	WBEN				Blatt/Sheet 1				
Index	Änderung/Description	Datum/Date	Name				Ers. f. / Replacement for:				
							1 Bl.				

Copying of this document and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of a patent or the registration of the utility model or design.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten.