
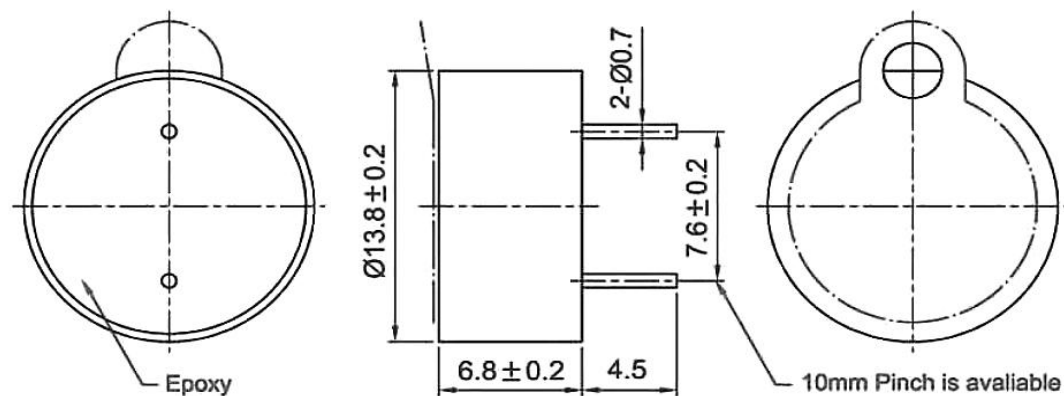


SPECIFICATION		
1	Model No.	CFDP20-E
2	Rated Voltage (Vp-p)	12
3	Resonance Frequency (KHz)	4.0±0.5
4	Max Input Voltage (Vp-p)	25
5	Rated Current (mA)	≤3
6	Capacitance at 120Hz (pF)	15000±30%
7	Sound Output at 10cm (dB)	≥85
8	Operating Temperature (°C)	-20~+70
9	Storage Temperature (°C)	-30~+80
10	Weight (g)	0.8
11	RoHS	Yes


REVISION HISTORY			
LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	9/23/2003	Y M
A			
B			
C			

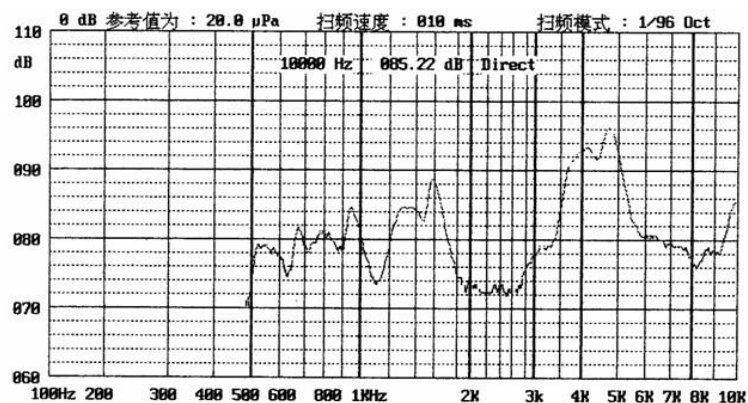

#### NOTES:

1.ALL DIMENSIONS ARE IN MILLIMETERS

2.SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

SIZE	Designed by	Date	Checked by	Date	Approved by	Date	Drawed date
							
A4				CFDP20-E			
				TRANSDUCER	Edition	Sheet	