


DC Brushless FAN 120x120x38-A Type




轴承结构：双滚珠、含油、液压、其他
Bearing: two ball、sleeve、HY、other
框外材质: 塑胶(等级:UL94V-0)
Frame: Plastic(Flammability:UL94V-0)
扇叶材质: 塑胶:(等级:UL94V-0)
Impeller: Plastic:(Flammability:UL94V-0)
风扇单重: 300g(Weight: 300g)

P@Q CURVE(AT RATED VOLTAGE)

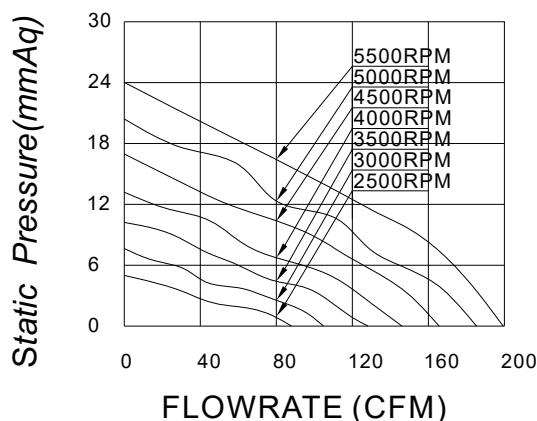

DIMENSIONS DRAWING(unit:mm)

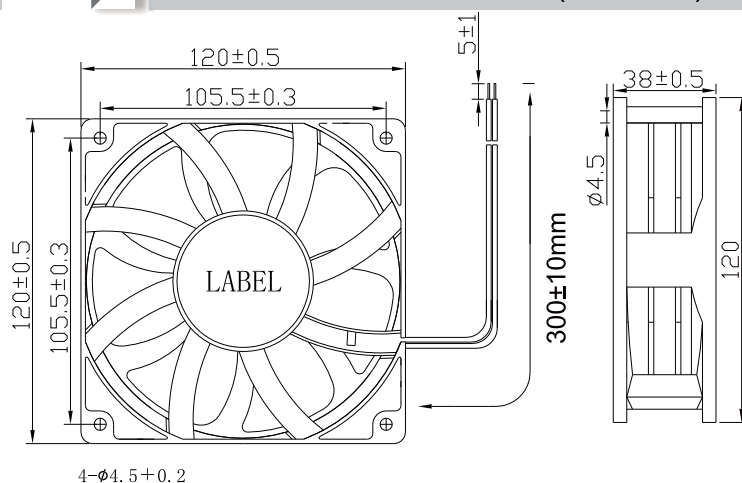

编码规则 Code Rule

例子 Example 12038H12B-1701
12038H12X-AY

Model No. is 12038H12X; Extro P/N code is AY

X means bearing type, can be S(sleeve bearing), can be B(ball bearing), can be Y(HY bearing), can be SU(sleeve with UL), can be BU(ball with UL), can be YU(HY with UL)

Y means special function code, it will be used for a certain parts no. or client.

产品型号 12038H12X; 附加代码 AY. X是一个不确定值, 它代表了不同的轴承类型,

S(含油轴承), B(滚珠轴承), Y(液压轴承), SU(含油轴承带UL), BU(滚珠轴承带UL), YU(液压轴承带UL)

Y是一个不确定的值, 它代表不同特殊风机功能, 由具体客户或者料号来确定

Model	P/N Code	Rated Voltage	Operationg Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Noise
型号	P/N 附加码	额定电压	工作电压范围	额定电流	额定输入功率	转速	最大风量		最大风压		噪音
PART.NO.	AY	VDC	VDC	Amp	Watt	R.P.M	M³/min	CFM	mmH2O	InH2O	dB-A
MG12038L12X		12	8~13.5	0.3	3.6	2500	2.734	96.55	5.91	0.233	43.4
MG12038M12X		12	8~13.5	0.6	7.2	3000	3.151	111.26	8.66	0.341	47.7
MG12038VM12X		12	8~13.5	0.9	10.8	3500	3.742	132.14	11.94	0.470	52.8
MG12038H12X		12	8~13.5	1.2	14.4	4000	4.330	152.89	15.46	0.609	54.5
MG12038HH12X		12	8~13.5	1.5	18	4500	4.797	169.37	19.73	0.777	58.1
MG12038VH12X		12	8~13.5	1.8	21.6	5000	5.380	189.97	24.40	0.961	62.1
MG12038HV12X		12	8~13.5	2.0	24	5500	5.945	209.92	29.28	1.153	65.2
MG12038L24X		24	18~26.5	0.15	3.6	2500	2.734	96.55	5.91	0.233	43.4
MG12038M24X		24	18~26.5	0.3	7.2	3000	3.151	111.26	8.66	0.341	47.7
MG12038VM24X		24	18~26.5	0.45	10.8	3500	3.742	132.14	11.94	0.470	52.8
MG12038H24X		24	18~26.5	0.6	14.4	4000	4.330	152.89	15.46	0.609	54.5
MG12038HH24X		24	18~26.5	0.75	18	4500	4.797	169.37	19.73	0.777	58.1
MG12038VH24X		24	18~26.5	0.9	21.6	5000	5.380	189.97	24.40	0.961	62.1

Model	P/N Code	Rated Voltage	Operationg Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Noise
型号	P/N 附加码	额定电压	工作电压范围	额定电流	额定输入功率	转速	最大风量		最大风压		噪音
PART.NO.	AY	VDC	VDC	Amp	Watt	R.P.M	M³/min	CFM	mmH2O	InH2O	dB-A
MG12038HV24X		24	18~26.5	1.0	24	5500	5.945	209.92	29.28	1.153	65.2
MG12038L48X		48	36~54	0.075	3.6	2500	2.734	96.55	5.91	0.233	43.4
MG12038M48X		48	36~54	0.15	7.2	3000	3.151	111.26	8.66	0.341	47.7
MG12038VM48X		48	36~54	0.225	10.8	3500	3.742	132.14	11.94	0.470	52.8
MG12038H48X		48	36~54	0.3	14.4	4000	4.330	152.89	15.46	0.609	54.5
MG12038HH48X		48	36~54	0.375	18	4500	4.797	169.37	19.73	0.777	58.1
MG12038VH48X		48	36~54	0.45	21.6	5000	5.380	189.97	24.40	0.961	62.1
MG12038HV48X		48	36~54	0.5	24	5500	5.945	209.92	29.28	1.153	65.2