


5.0*N+1.5 (N为位数)

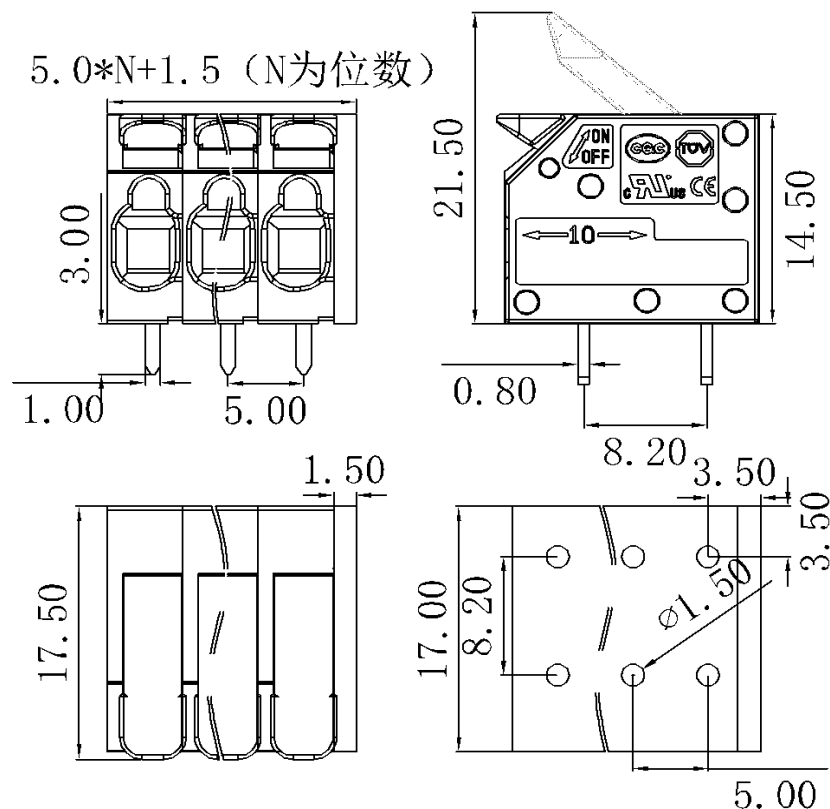

linear dimension (Tolerances Standard GB T 14486-2008)								—  ⊥		
variable range		over 6	over 10	over 30	over 60	over 100	over 160		over 10	over 100
	to 6	to 10	to 30	to 60	to 100	to 160	to 160	to 10	to 100	to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REVISION RECORD

REV.	DESCRIPTION	ECN NO.	APPROVED	DATE

项目/参数/认证				
额定电压(Rated Voltage) [V]	450	450	450	300
额定电流(Rated Current) [A]	32	32	32	20
额定线经平方(Wire Range mm²)	0.34-1	0.34-1	0.34-1	0.34-1
额定线经线号(Wire Range AWG)	22-12	22-12	22-12	22-12
冲击电压 Impulse withstand voltage	4 (KV)			
剥线长度(Stripping Length) [mm]	10-11 (mm)			
绝缘材料(Insulation Material)	PA66 UL94V-0			
导体材料(Contact Material)	红铜 (Red brass)			
导体表面镀层(Contactive Coating)	镀锡 (Dumb tin)			
间距(Pitch) [mm]	5.0			
级数(Poles) [P]	2-32P			
工作温度(Operating temperatur) [°C]	-40°C ~ +105°C			
焊锡温度(Soldering temperature) [°C]	250°C / 5S			

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	1:1	第二视角/THIRD ANGLE PROJECTION	版本/REV	V0
						名称/TITLE	2204R/5.0	