




RoHS Compliance

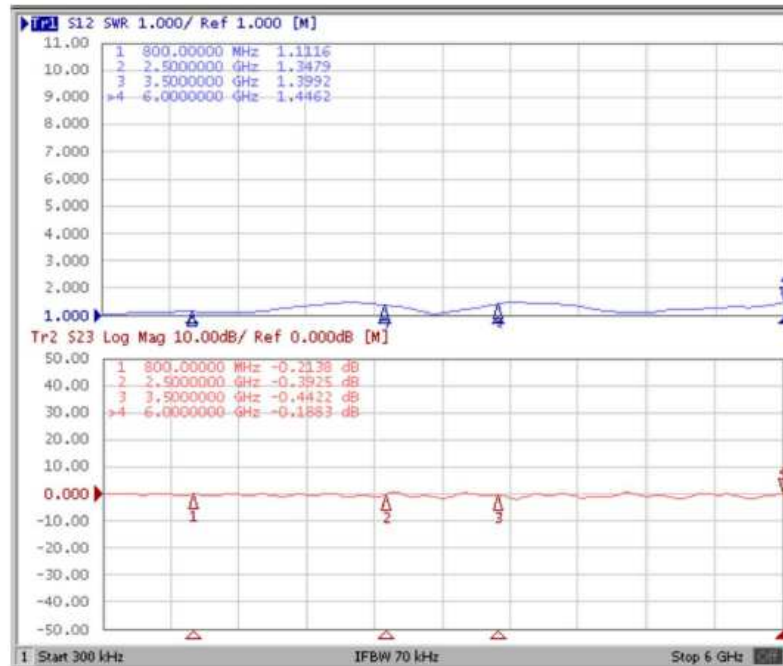

Attachment:
Cap:Red
Nut
Gasket
Spring



Notes:

1.Material:

Connector:Brass,Gold Plating

2.Electric:

Applicable technical standards:MIL-C-39012/IEC60169-15

Frequency Range:0~6G

Impedance:50 OHM

Vswr:1.5 Max

Conduction Impedance:0.5 OHM

Insulation Resistance:5000MΩ Min

Max Power:10 W

Operating Voltage:335V Max

Durability:500 Cycles

Withstand Voltage:1000Vrms


Temperature:-35°~+80°

3.The finished product requires 100% electrical testing

4.The product parts must not have scratches, deformation, oil stains or other defects

5.Conduction test requires a voltage withstand of over 500V and must be conducted

6.Salt Spray Test:48H Min

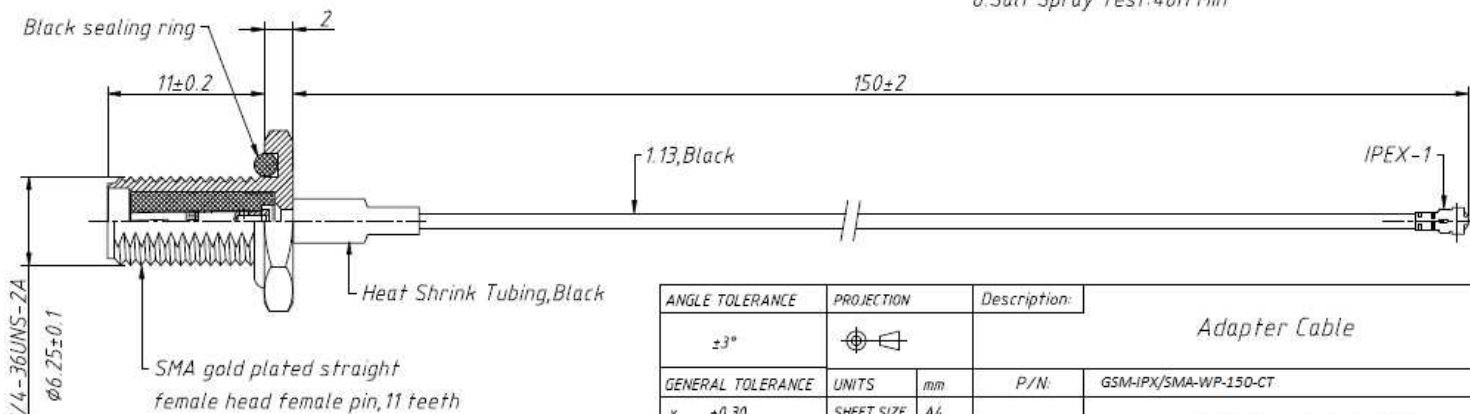

ANGLE TOLERANCE	PROJECTION	Description:		
±3°		Adapter Cable		
GENERAL TOLERANCE	UNITS	mm	P/N:	GSM-IPX/SMA-WP-150-CT
.x ±0.30	SHEET SIZE	A4		
.xx ±0.20	Draw:	Song		
.xxx ±0.10	Check:	Daniel		

CONN THERM