

广州美嘉科技有限公司


UL[®] US CE RoHS

DC Brushless FAN 25x25x7mm-A Type




轴承结构：滚珠、含油、液压、其他
Bearing: Ball、sleeve、HY、other
框外材质: 塑胶(等级:UL94V-0)
Frame: Plastic(Flammability:UL94V-0)
扇叶材质: 塑胶:(等级:UL94V-0)
Impeller: Plastic:(Flammability:UL94V-0)
风扇单重: 5g(Weight: 5g)

P@Q CURVE(AT RATED VOLTAGE)

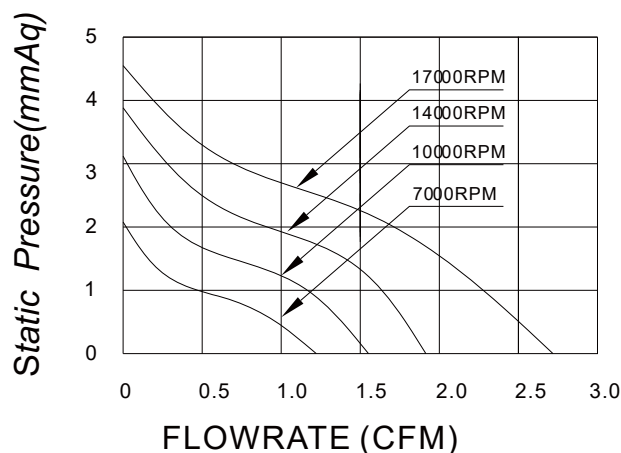

DIMENSIONS DRAWING(unit:mm)

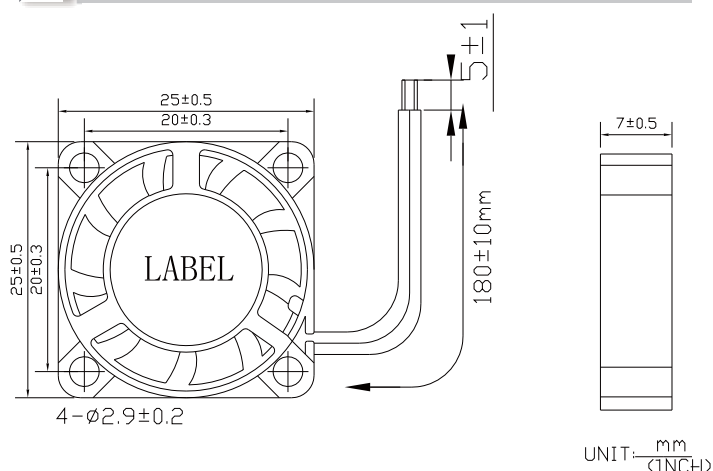

编码规则 Code Rule

例子 Example 12038H12B-1701
12038H12X-AY

Model No. is 12038H12X; Extro P/N code is AY

X means bearing type, can be S(sleeve bearing), can be B(ball bearing), can be Y(HY bearing), can be SU(sleeve with UL), can be BU(ball with UL), can be YU(HY with UL)

Y means special function code, it will be used for a certain parts no. or client.

产品型号 12038H12X; 附加代码 AY. X是一个不确定值, 它代表了不同的轴承类型,

S(含油轴承), B(滚珠轴承), Y(液压轴承), SU(含油轴承带UL), BU(滚珠轴承带UL), YU(液压轴承带UL)

Y是一个不确定的值, 它代表不同特殊风机功能, 由具体客户或者料号来确定

Model	P/N Code	Rated Voltage	Operationg Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Noise
型号	P/N 附加码	额定电压	工作电压范围	额定电流	额定输入功率	转速	最大风量		最大风压		噪音
PART.NO.	AY	VDC	VDC	Amp	Watt	R.P.M	M³/min	CFM	mmH2O	InH2O	dB-A
MG2507L05X		5	1.8~3~6	0.14	0.72	7000	0.035	1.22	2.16	0.085	19.6
MG2507M05X		5	1.8~3~6	0.17	0.84	10000	0.044	1.55	3.1	0.122	23.5
MG2507H05X		5	1.8~3~6	0.19	0.96	14000	0.054	1.9	3.8	0.15	26.4
MG2507HH05X		5	1.8~3~6	0.22	1.08	17000	0.08	2.81	4.5	0.177	31.2
MG2507L12X		12	8.5~13.5	0.06	0.72	7000	0.035	1.22	2.16	0.085	19.6
MG2507M12X		12	8.5~13.5	0.07	0.84	10000	0.044	1.55	3.1	0.122	23.5
MG2507H12X		12	8.5~13.5	0.08	0.96	14000	0.054	1.9	3.8	0.15	26.4
MG2507HH12X		12	8.5~13.5	0.09	1.08	17000	0.08	2.81	4.5	0.177	31.2