

COMPACT POWER RELAY

1 POLE - 25/30A (For automotive applications)

FBR51, 52 Series

■ FEATURES

- Compact and light weight structure
- High current contact capacity
(carrying current: 35 A/10 minutes, 30 A/1 hour)
- High resistance to vibration and shock
- Improved heat resistance and extended operation range
- Two contact gap options
(FBR51: 0.3 mm, FBR52: 0.6 mm)
- Three types of contact material



■ Part Numbers

[Example] $\frac{\text{FBR51}}{\text{(a)}} - \frac{\text{N}}{\text{(b)}} - \frac{\text{D12}}{\text{(c)}} - \frac{\text{W1}}{\text{(d)}}$

(a)	Relay type	FBR51 : FBR51-Series - Standard type (contact gap 0.3mm) FBR52 : FBR52-Series - Wide contact gap type (contact gap 0.6mm)
(b)	Enclosure	N : Plastic sealed type
(c)	Coil rated voltage	D12 : 6...12VDC Coil rating table at page 3
(d)	Contact material	W1 : Silver-tin oxide indium (high power type, 1 form C) WL : Silver-tin oxide indium (lamp loads, 1 form A, FBR51 only) WF : Silver-tin oxide indium (flasher loads, 1 form A, FBR51 only)

Actual marking does not carry the type name: "FBR"
E.g.: Ordering code: "FBR51ND12-W1", actual marking: "51ND12-W1"

FBR51, 52 Series

■ Specifications (for motor load)

Item			Characteristics	Remarks / conditions
			W1 contact	
Contact data	Configuration		1 form C (SPDT)	
	Material		AgSnO2In (high capacity type)	
	Voltage drop		Max. 100mV	At 1A/12VDC
	Contact rating		25A, 14VDC	At locked motor load
	Max. carrying current		35A / 10 min., 30A 1hr	
	Max. inrush current		60A	Reference
	Max. switching voltage		16VDC	Reference
	Max. switching power		35A	Reference
	Min. switching load *1		1A 6VDC	Reference
Coil	Storage temperature range		40° C ~ +100° C	No frost
	Operating temperature range		-40° C ~ +85° C (At long continuous carry current conditions, refer to "operating coil voltage range" on page 7)	No frost
Timing data	Operate		Max. 10ms	At nominal voltage No diode, excluding bounce
	Release		Max. 5ms	At nominal voltage No diode, excluding bounce
Life	Mechanical	AC contact rating	Min. 10 x 10 ⁶ operations	
	Electrical (resistive)	DC contact rating	Min. 100 x 10 ³ operations	At contact rating, locked motor load
Other	Vibration resistance	Misoperation	10 to 200Hz, acceleration 44m/s ² (4.5G) constant acceleration	Direction X, Y, Z, contact ON/OFF total 6 cycles
		Endurance	10 to 200Hz, acceleration 44m/s ² (4.5G) constant acceleration	Direction X, Y, Z, con-tact OFF total 6 hours
	Shock resistance	Misoperation	Min. 100m/s ² (11 ± 1ms)	Direction X, Y, Z, con-tact ON/OFF total 36 times
		Endurance	Min. 1,000m/s ² (6 ± 1ms)	Direction X, Y, Z, con-tact OFF total 18 times
	Dimensions / weight		12.1 x 15.5 x 13.7 mm / approx. 6g	

*1: Minimum switching loads mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels. Care shall be taken on the heat generated on PC board when maximum carrying current exceeds 10A. Please perform the confirmation test with actual conditions.

FBR51, 52 Series

■ Specifications (for lamp load)

Item			Characteristics		Remarks / conditions
			WF contact	WL Contact	
Contact data	Configuration		1 form A (SPST)		
	Material		AgSnO ₂ In (for flasher)	AgSnO ₂ In (for lamp)	
	Voltage drop		Max. 100mV		At 2A/12VDC
	Contact rating		14VDC, 80W	14VDC, 120W	At lamp load
	Max. carrying current		35A / 10 min., 30A 1hr		At 25 °C with nominal coil voltage
	Max. inrush current		60A		At lamp load, reference
	Max. switching voltage		16VDC		Reference
	Max. switching power		35A		Reference
	Min. switching load *1		1A 6VDC		Reference
Coil	Storage temperature range		40°C ~ +100°C		No frost
	Operating temperature range		-40°C ~ +85°C (At long continuous carry current conditions, refer to "operating coil voltage range" on page 7)		No frost
Timing data	Operate		Max. 10ms		At nominal voltage No diode, excluding bounce
	Release		Max. 5ms		At nominal voltage No diode, excluding bounce
Life	Mechanical	AC contact rating	Min. 10 x 10 ⁶ operations		
	Electrical (resistive)	DC contact rating	Min. 2.5 x 10 ⁶ operations at inrush 11A 14VDC (0.35 sec - ON/ 0.35 sec - OFF)	Min. 100 x 10 ³ operations	At contact rating, lamp load
Other	Vibration resistance	Misoperation	10 to 200Hz, acceleration 44m/s ² (4.5G) constant acceleration		Direction X, Y, Z, contact ON/OFF total 6 cycles
		Endurance	10 to 200Hz, acceleration 44m/s ² (4.5G) constant acceleration		Direction X, Y, Z, contact OFF total 6 hours
	Shock resistance	Misoperation	Min. 100m/s ² (11 ± 1ms)		Direction X, Y, Z, contact ON/OFF total 36 times
		Endurance	Min. 1,000m/s ² (6 ± 1ms)		Direction X, Y, Z, contact OFF total 18 times
	Dimensions / weight		12.1 x 15.5 x 13.7 mm / approx. 6g		

*1: Minimum switching loads mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

Care shall be taken on the heat generated on PC board when maximum carrying current exceeds 10A. Please perform the confirmation test with actual conditions.

FBR51, 52 Series

■ Coil Data (FBR51 series)

Coil code	Rated Coil Voltage (VDC)	Coil Resistance +/-10% (Ω)	Must Operate Voltage* (VDC)	Must Release Voltage* (VDC)
D06	6	60	3.6 4.5 (at 85°C)	0.5 0.7 (at 85°C)
D09	6	135	5.4 6.8 (at 85°C)	0.7 0.9 (at 85°C)
D10	9	180	6.3 7.9 (at 85°C)	0.8 1.0 (at 85°C)
D12	12	240	7.3 9.2 (at 85°C)	1.0 1.3 (at 85°C)

Coil Data (FBR52 series)

Coil code	Rated Coil Voltage (VDC)	Coil Resistance +/-10% (Ω)	Must Operate Voltage* (VDC)	Must Release Voltage* (VDC)
D06	6	45	3.6 4.5 (at 85°C)	0.5 0.7 (at 85°C)
D09	6	100	5.4 6.8 (at 85°C)	0.7 0.9 (at 85°C)
D10	9	135	6.3 7.9 (at 85°C)	0.8 1.0 (at 85°C)
D12	12	180	7.3 9.2 (at 85°C)	1.0 1.3 (at 85°C)

Note: All values in the table are valid at 20°C and zero contact current, unless otherwise specified.

*: Specified operated values are valid for pulse wave voltage.



Please use at rated coil voltage. Please refer to characteristic data and set up adequate voltage in case of use at over voltage.

Characteristic Data (Reference)



* Characteristic data is not a guaranteed value, but measured values of samples from production line.

- Test item
 25A 14VDC
 motor lock 200,000
 operations
 minimum
 (FBR52N(-)-W1 type)

- Test circuit

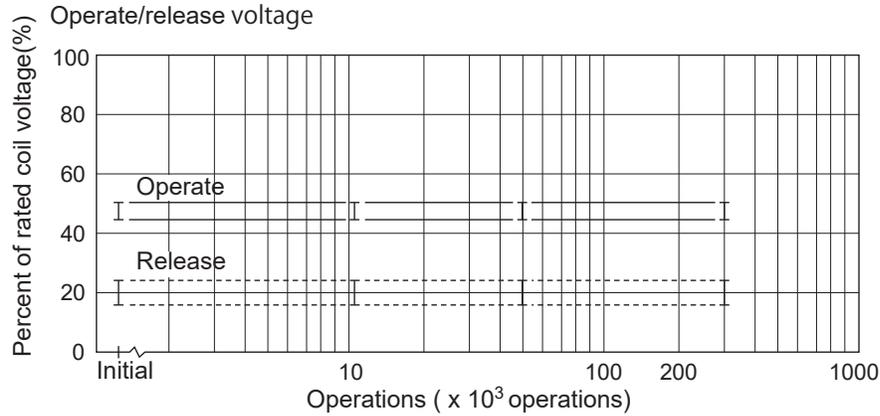



- Current wave form

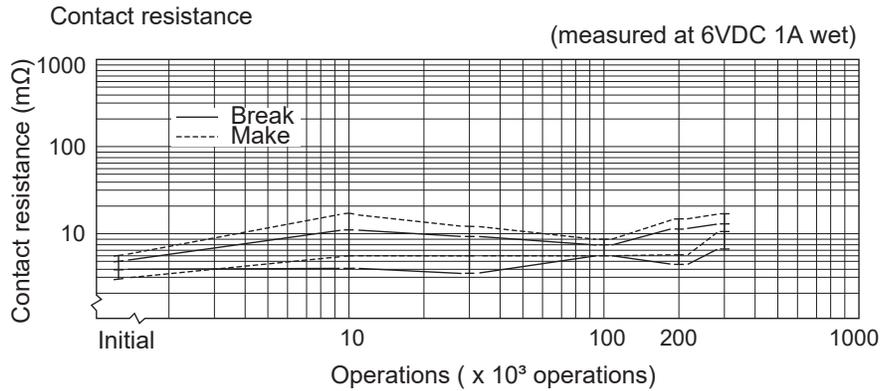



- Test item
 20A 14VDC
 motor free 400,000
 operations minimum
 (FBR51N(-)-W1 type)

- Test circuit

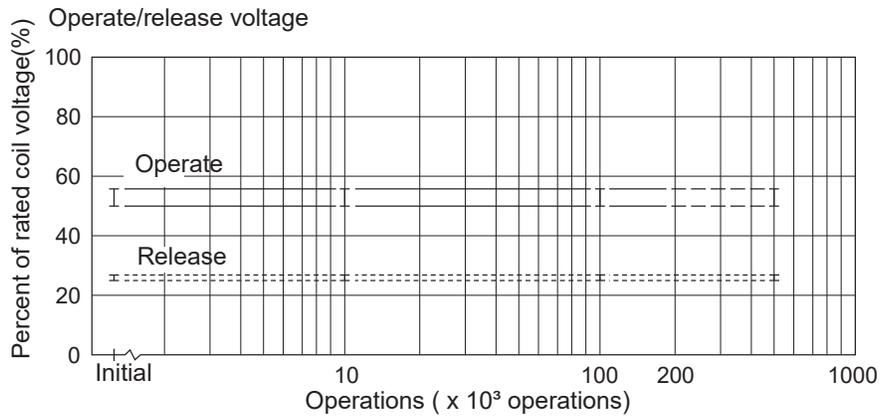

- Current wave form

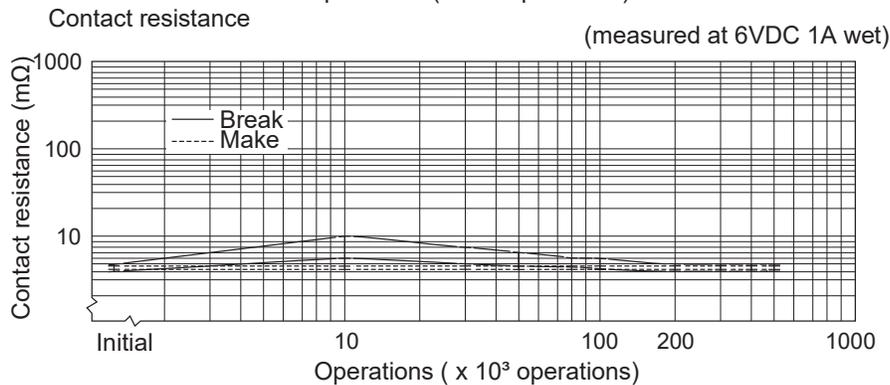



FBR51, 52 Series



- Life test (example)

- Test item
 Inrush 80A 14VDC
 lamp load (120W)
 100,000 ops. minimum
 (FBR51N()-WL type)

- Test circuit

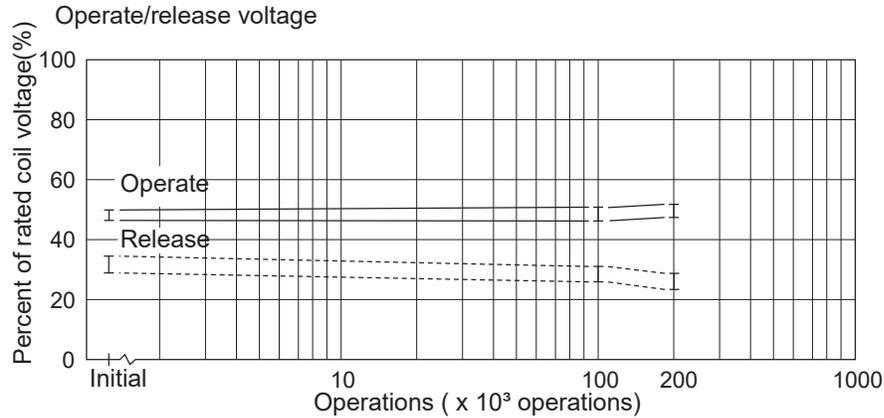



- Current wave form

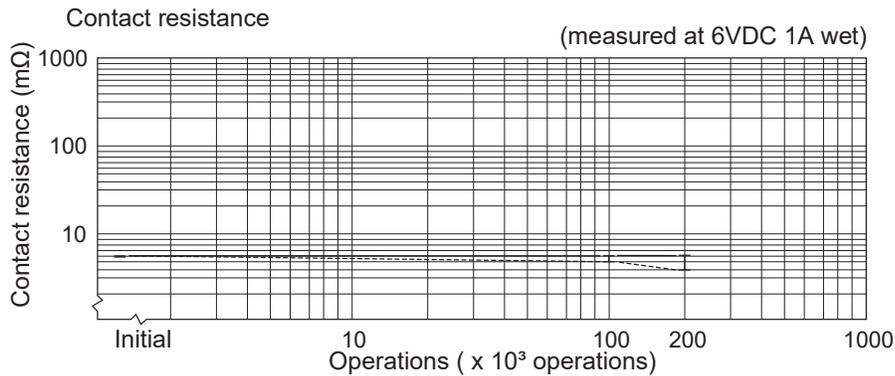


- Test item
 Inrush 11A 14VDC
 flasher, hazard lamp
 (80W)load 2,500,000
 operations minimum
 (FBR51N()-WF type)

- Test circuit

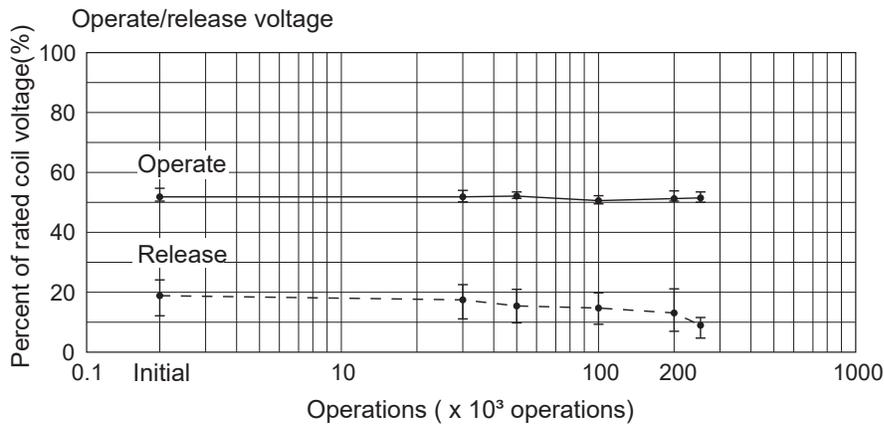


- Current wave form

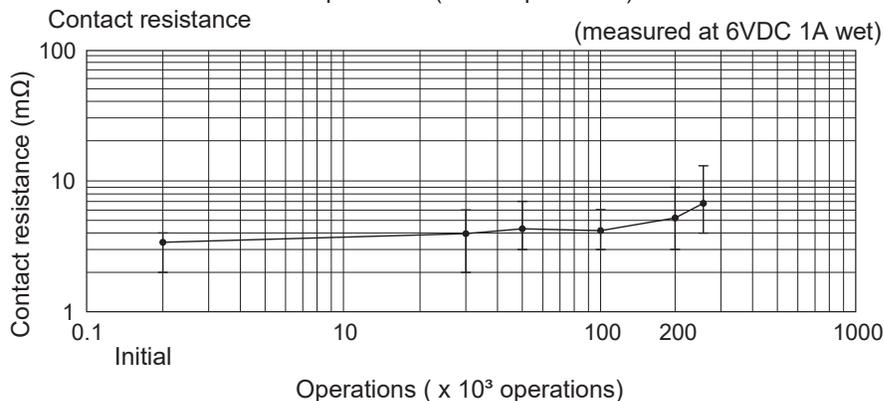


FBR51, 52 Series


Coil Temperature Rise

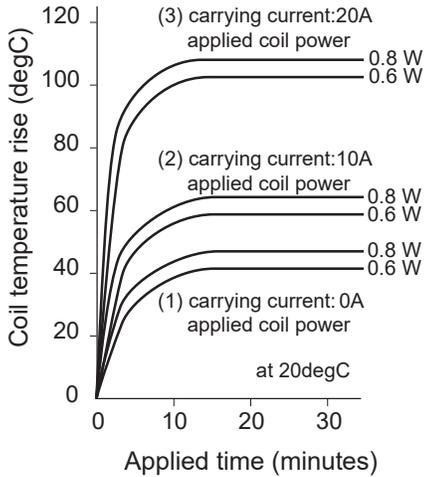


Operating Coil Voltage Range

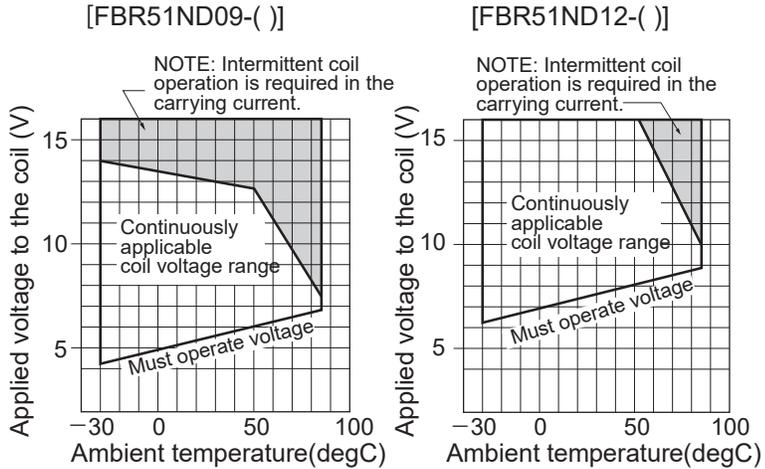


Coil Temperature Rise

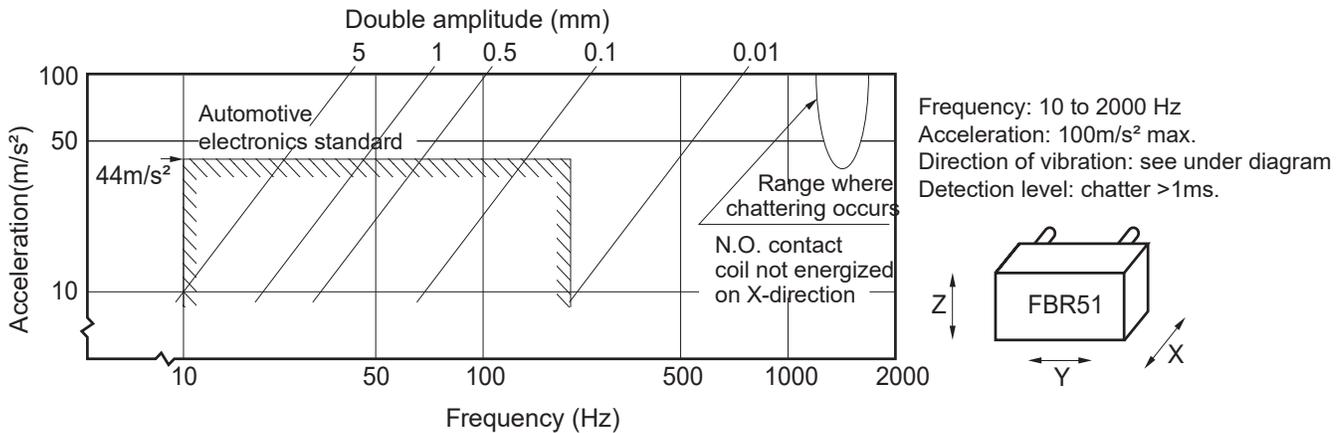

Shock Resistance Characteristics

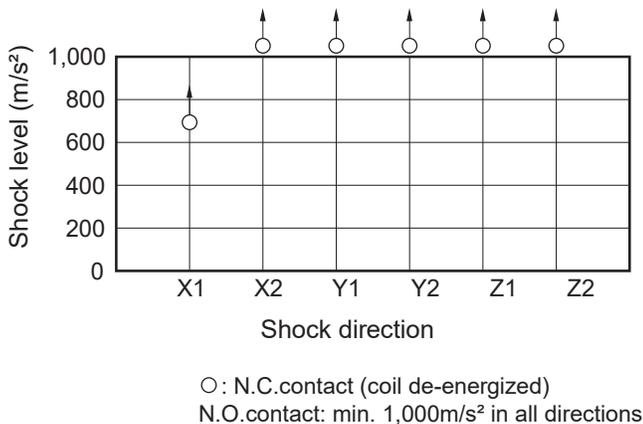


Shock application time: 6 ± 1 ms, half-sine wave
 Test material: coil, energized and de-energized
 Shock direction: set under diagram
 Detection level: chatter > 1ms.




FBR51, 52 Series

Maximum Switching Power

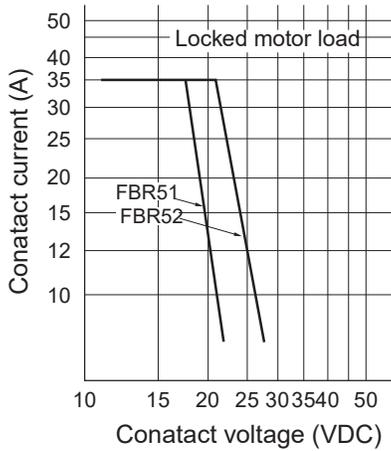


Live Curve

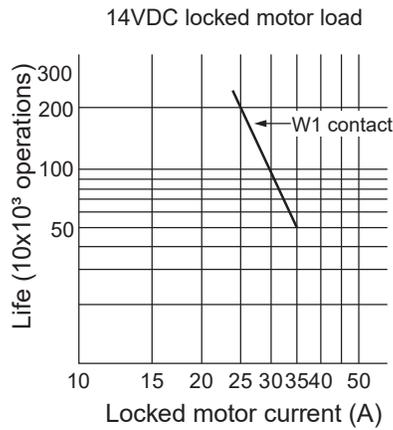


Initial Distributions data


Distribution of operate and release voltage

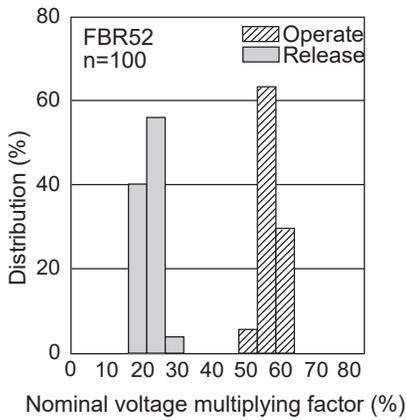

Distribution of operate and release time

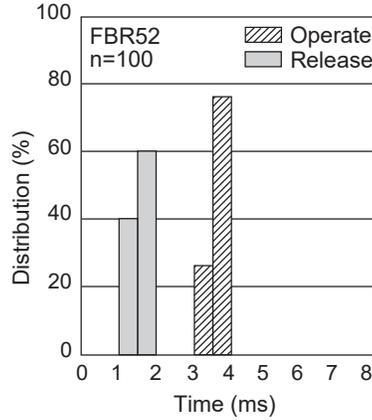


Distribution of contact resistance

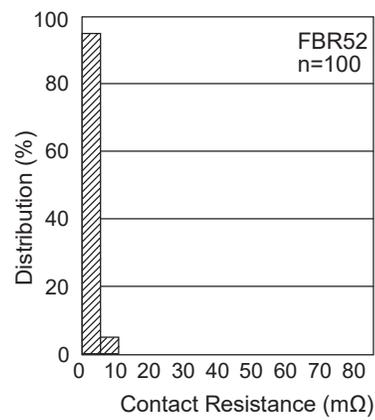

■ Dimensions


- Dimensions

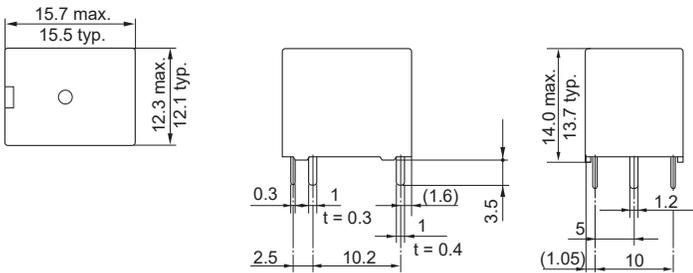


* Dimensions of the terminals do not include thickness of pre-solder.

- Schematics
(BOTTOM VIEW)


FBR50-W1



FBR50-WL

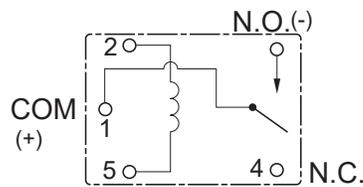


FBR50-WF

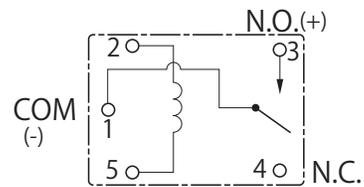

Refer to the test circuit at CHARACTERISTIC D for connection.

- PC Board Mounting Hole Layout
(BOTTOM VIEW)

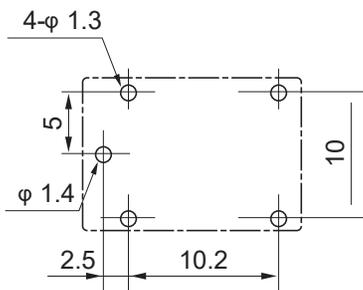

(): Reference value
 Unit: mm

* Tolerance of PC board mounting hole layout : ±0.1 unless otherwise specified.

CAUTIONS

- All values mentioned in this datasheet are provided under ideal conditions. Please perform the confirmation test before actual use.
- Reflow soldering is prohibited.
- Do not use relays in the atmosphere with sulfide gas, chloride gas or nitric oxide. Contact resistance may increase.
- Do not use silicon or silicon-containing product or materials near relays. It may cause contact failure.

GENERAL INFORMATION

1. ROHS Compliance

- All relays produced by FCL Components are compliant with RoHS directive 2011/65/EU, including commission delegated directive 2015/863.

2. Recommended lead free solder condition

- Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified. This material has been verified to be compatible with PbSn assembly process.
- Recommended solder for assembly: Sn-3.0Ag-0.5Cu.

Flow Solder Condition:

Pre-Heating: Maximum 120°C within 90 sec.

Soldering: Eip within 5 sec. at 255°C±5°C solder bath

Relay must be cooled by air immediately after soldering

Solder by Soldering Iron:

Soldering Iron: 30-60W

Temperature: Maximum 340-360°C

Duration: Maximum 3 sec.

We highly recommend that you confirm your actual solder conditions

3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays, unless otherwise indicated.

4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

Contact

Japan

FCL COMPONENTS LIMITED
Shinagawa Seaside Park Tower
12-4, Higashi-shinagawa 4-chome,
Tokyo 140 0002, Japan
Tel: +81-3-3450-1682
Email: fcl-contact@cs.fcl-components.com

North and South America

FCL COMPONENTS AMERICA, INC.
2055 Gateway Place Suite 480,
San Jose, CA 95110 USA
Tel: +1-408-745-4900
Email: fcai.components@fcl-components.com

Europe

FCL COMPONENTS EUROPE B.V.
Diamantlaan 25
2132 WV Hoofddorp, Netherlands
Tel: +31-23-556-0910
Email: info.fceu@cs.fcl-components.com

Asia Pacific

FCL COMPONENTS ASIA PTE LTD.
No. 20 Harbour Drive, #07-01B
Singapore 117612
Tel: +65-6375-8560
Email: fcal@fcl-components.com

China

FCL COMPONENTS (SHANGHAI) CO., LTD.
Unit 1105, Central Park - Jing An,
No.329 Heng Feng Road, Shanghai 200070,
China
Tel: +86-21-3253 0998
Email: fcsh@fcl-components.com

Web: www.fcl-components.com/en/

© 2024 FCL Components Limited. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

FCL Products are intended for general use, including without limitation, in personal, household and office environments, in buildings and for ordinary use in the industry. FCL Products are not intended to be used in applications where extremely high safety is required ("High Safety Required Applications"), such as, but not limited to, applications in nuclear facilities, in aircraft automatic flight control, in air traffic control, in mass transit system control, in missile launch system, in weapon systems, in medical equipment for life support or any application involving a direct serious risk of physical injury or death.

Please do not use FCL Products without securing the sufficient safety and reliability required for the High Safety Required Applications. In addition, FCL shall not be liable against the customer and/or any third party for any claims or damages arising in connection with the use of FCL Products in the High Safety Required Applications.

FCL warrants that its Products, if properly used and services, will conform to their specification and will be free from defects in material and workmanship for twelve months from delivery.

The implied warranties of merchantability and fitness for a particular purpose and all other warranties, representations and conditions, express or implied by statute, trade usage or otherwise, except as set forth in this warranty, are excluded and shall not apply to the Products delivered.

The contents, data and information in this datasheet are provided by FCL Components Limited as a service only to its user and only for general information purposes. The use of the contents, data and information provided in this datasheet is at the users' own risk.

FCL has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

FCL Components Limited and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof.

Nor do FCL Components Limited and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. February 1, 2024.
