


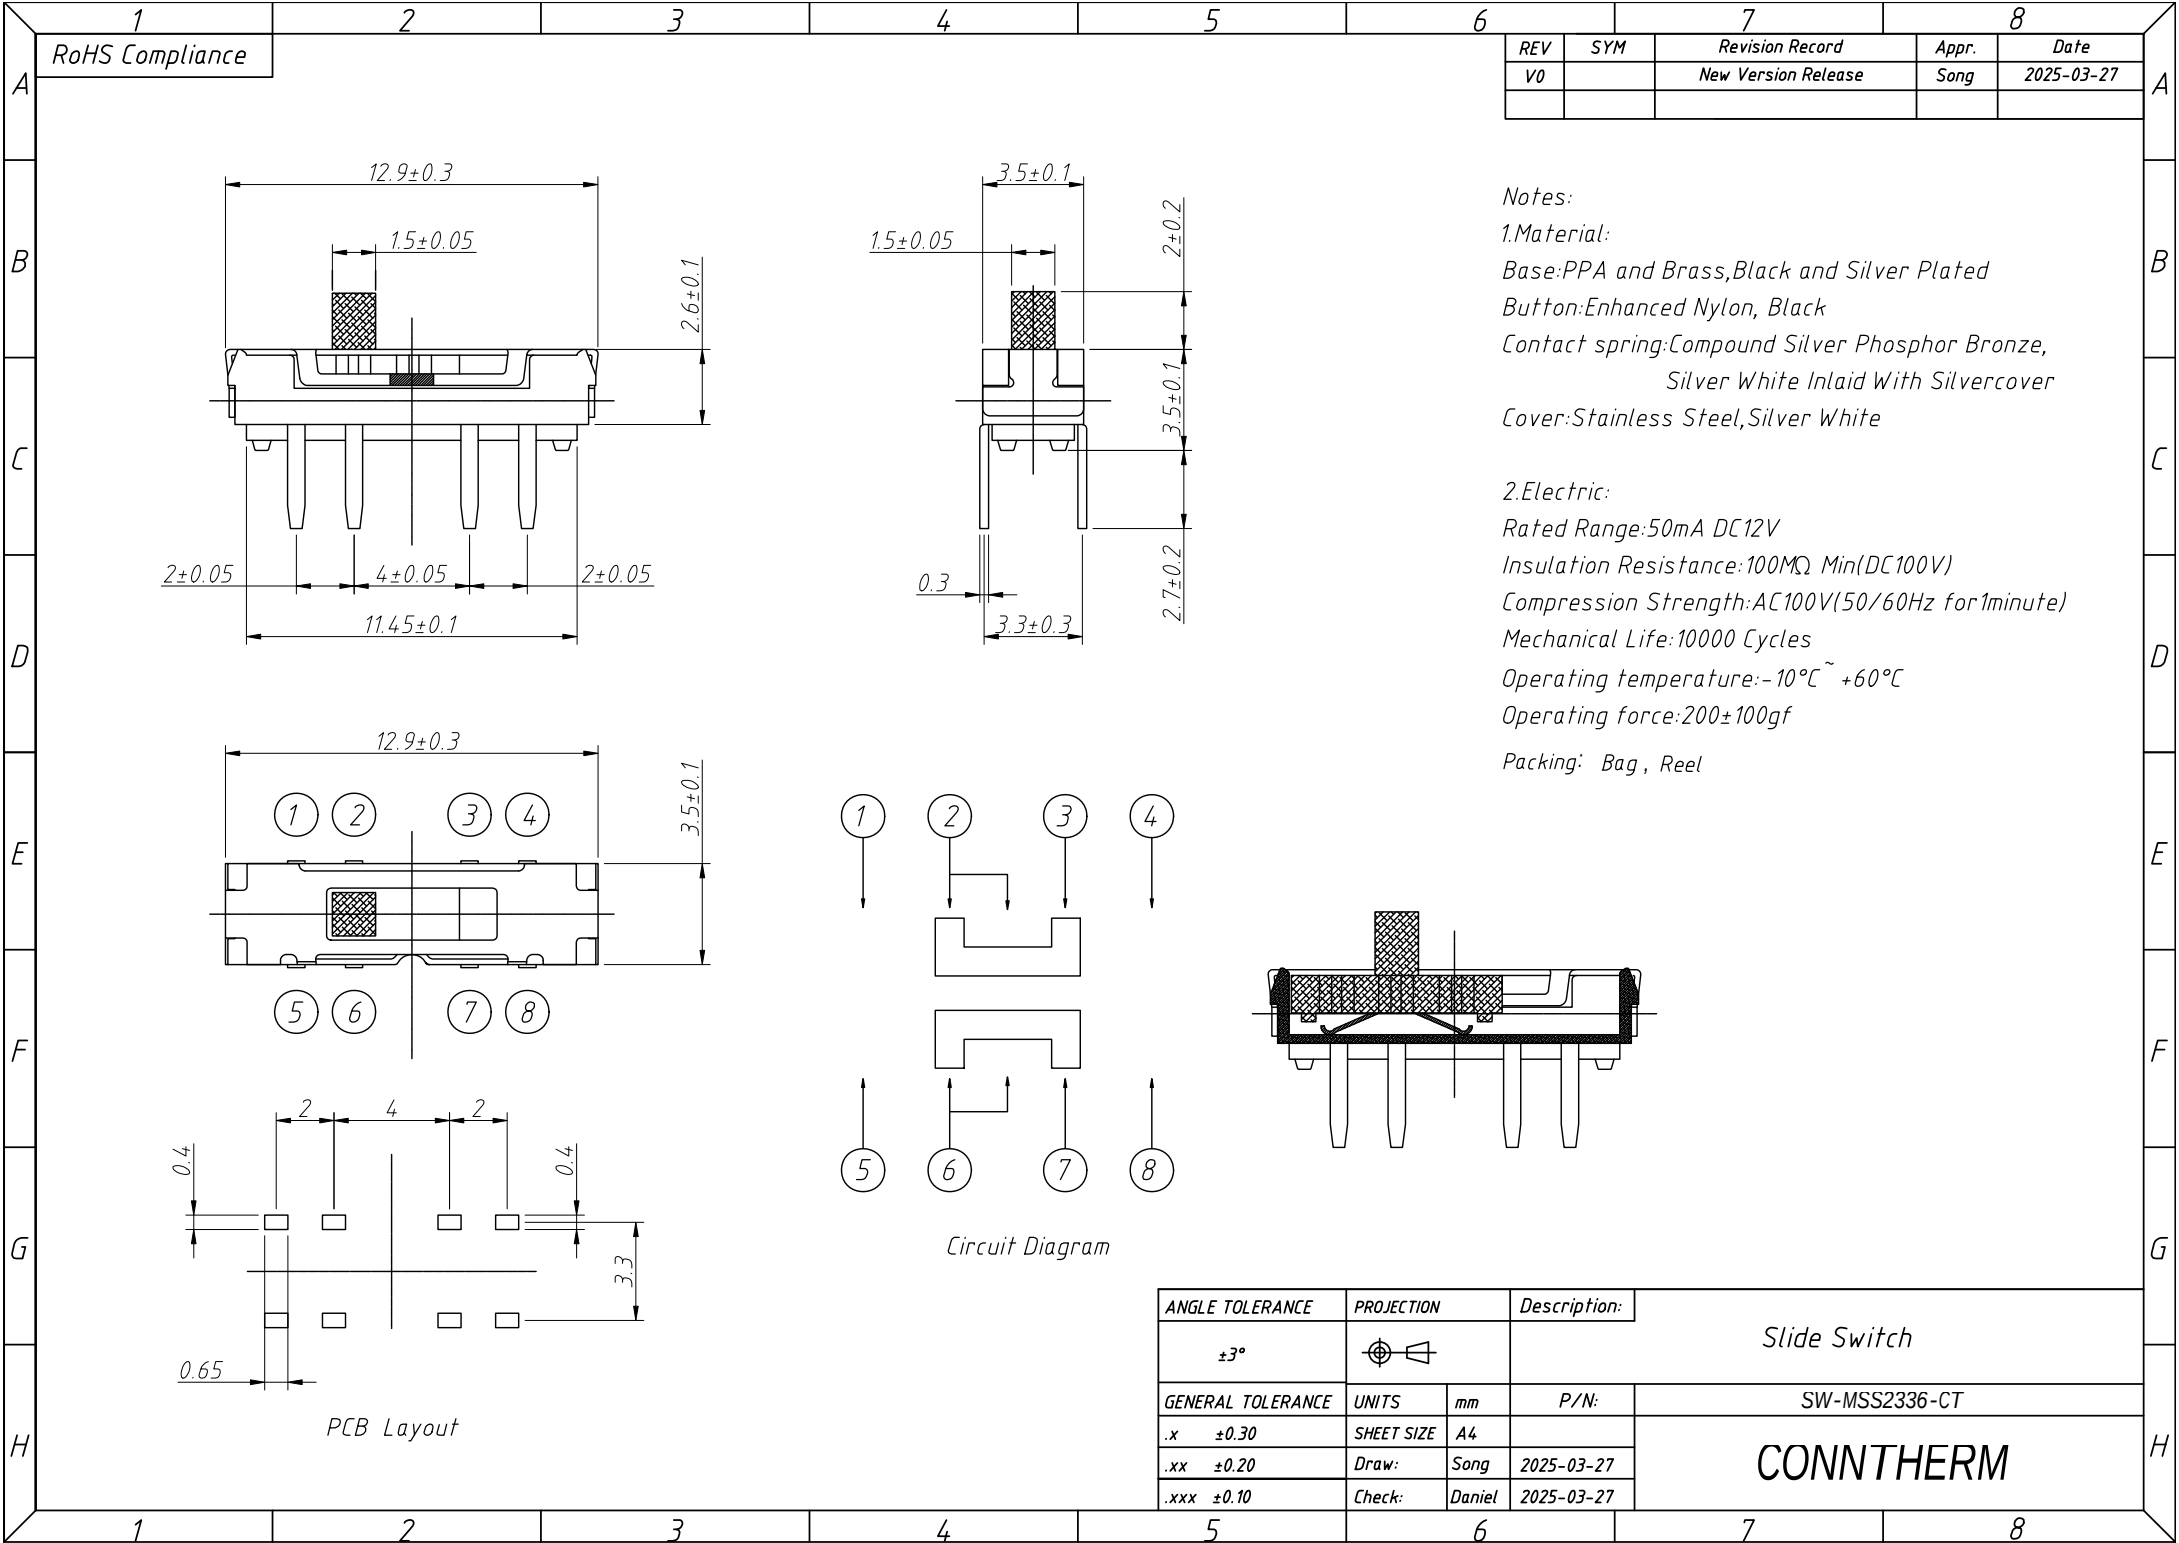

1  
RoHS Compliance

| 6   |     | 7                   |  | 8     |            |
|-----|-----|---------------------|--|-------|------------|
| REV | SYM | Revision Record     |  | Appr. | Date       |
| V0  |     | New Version Release |  | Song  | 2025-03-27 |
|     |     |                     |  |       |            |

Notes:

1.Material:

Base:PPA and Brass,Black and Silver Plated

Button:Enhanced Nylon, Black

Contact spring:Compound Silver Phosphor Bronze,  
Silver White Inlaid With Silvercover

Cover:Stainless Steel,Silver White

2.Electric:

Rated Range:50mA DC12V

Insulation Resistance:100MΩ Min(DC100V)

Compression Strength:AC100V(50/60Hz for1minute)

Mechanical Life:10000 Cycles

Operating temperature:-10℃~+60℃

Operating force:200±100gf

Packing: Bag , Reel

| ANGLE TOLERANCE   |       | PROJECTION |        | Description: |               |
|-------------------|-------|------------|--------|--------------|---------------|
| ±3°               |       |            |        | Slide Switch |               |
| GENERAL TOLERANCE |       | UNITS      | mm     | P/N:         | SW-MSS2336-CT |
| .x                | ±0.30 | SHEET SIZE | A4     |              | CONN THERM    |
| .xx               | ±0.20 | Draw:      | Song   | 2025-03-27   |               |
| .xxx              | ±0.10 | Check:     | Daniel | 2025-03-27   |               |