
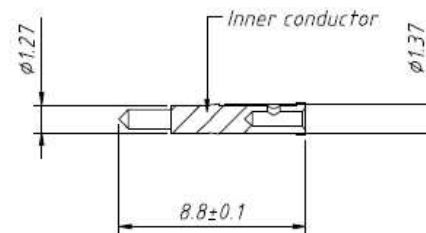
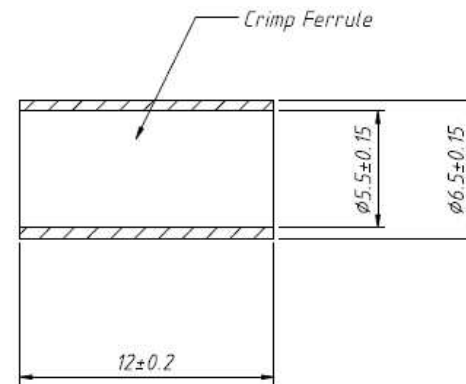


RoHS Compliance

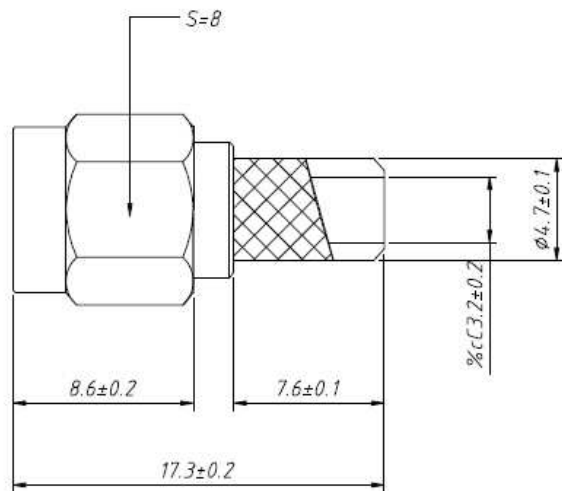

Material:
Contact: Brass, Gold plated
Pin: Gold plated
Crimp Ferrule: Nickel plated surface

Electrical Specifications:
Impedance: 50Ω
Frequency Range: 0-3GHz

Mechanical:
Durability: 500 cycles
Salt Spray Test 48H
Cable Group: RG58CU

ANGLE TOLERANCE	PROJECTION	Description:		
±3°		SMA Connector		
GENERAL TOLERANCE	UNITS	mm	P/N:	SMA101G02RG58-CT
x.x ±0.30	SHEET SIZE	A4	4:1	CONNTHERM
x.xx ±0.20	Draw:	Daniel		
x.xxx ±0.10	Check:	Daniel		