


DC Brushless FAN 60x60x10m-A Type


轴承结构：双滚珠、含油、液压、其他
Bearing: two ball、sleeve、HY、other
框外材质: 塑胶(等级:UL94V-0)
Frame:Plastic(Flammability:UL94V-0)
扇叶材质:塑胶:(等级:UL94V-0)
Impeller:Plastic:(Flammability:UL94V-0)
风扇单重:21g(Weight:21g)



P@Q CURVE(AT RATEDVOLTAGE)

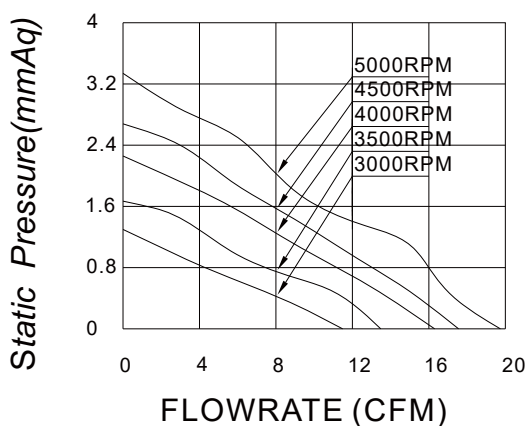

DIMENSIONS DRAWING(unit:mm)

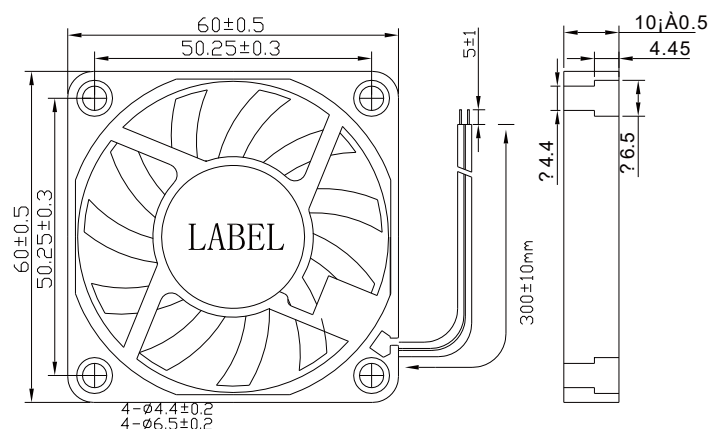

编码规则 Code Rule

例子 Example 12038H12B-1701
12038H12X-AY

Model No. is 12038H12 X; Extro P/N code is AY

X means bearing type, can be S(sleeve bearing), can be B(ball bearing), can be Y(HY bearing), can be SU(sleeve with UL), can be BU(ball with UL), can be YU(HY with UL)

Y means special function code, it will be used for a certain parts no. or client.

产品型号 12038H12X; 附加代码 AY. X是一个不确定值, 它代表了不同的轴承类型,

S(含油轴承), B(滚珠轴承), Y(液压轴承), SU(含油轴承带UL), BU(滚珠轴承带UL), YU(液压轴承带UL)

Y是一个不确定的值, 它代表不同特殊风机功能, 由具体客户或者料号来确定

Model	P/N Code	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Noise
型号	P/N 附加码	额定电压	工作电压范围	额定电流	额定输入功率	转速	最大风量		最大风压		噪音
PART.NO.	AY	VDC	VDC	Amp	Watt	R.P.M	M³/min	CFM	mmH2O	InH2O	dB-A
MG6010L05X		5	1.8~3~6	0.072	0.36	3000	0.325	11.4	1.30	0.051	25.3
MG6010M05X		5	1.8~3~6	0.096	0.48	3500	0.381	13.4	1.67	0.066	29.3
MG6010H05X		5	1.8~3~6	0.12	0.60	4000	0.461	16.2	2.29	0.090	32.8
MG6010HH05X		5	1.8~3~6	0.144	0.72	4500	0.501	17.7	2.72	0.107	35.9
MG6010VH05X		5	1.8~3~6	0.168	0.84	5000	0.550	19.4	3.34	0.131	39.0
MG6010L12X		12	8.5~13.5	0.03	0.36	3000	0.325	11.4	1.30	0.051	25.3
MG6010M12X		12	8.5~13.5	0.04	0.48	3500	0.381	13.4	1.67	0.066	29.3
MG6010H12X		12	8.5~13.5	0.05	0.60	4000	0.461	16.2	2.29	0.090	32.8
MG6010HH12X		12	8.5~13.5	0.06	0.72	4500	0.501	17.7	2.72	0.107	35.9
MG6010VH12X		12	8.5~13.5	0.07	0.84	5000	0.550	19.4	3.34	0.131	39.0