

DC Centrifugal FAN Ø175x69mm-BType



轴承结构：双滚珠

Bearing: Two ball

框外材质: 铝:(等级:UL94V-0)


Frame:Aluminum(Flammability:UL94V-0)

扇叶材质:塑胶:(等级:UL94V-0)


Impeller:Plastic:(Flammability:UL94V-0)

风扇单重:800g(Weight:800g)

P@QCURVE(AT RATEDVOLTAGE)

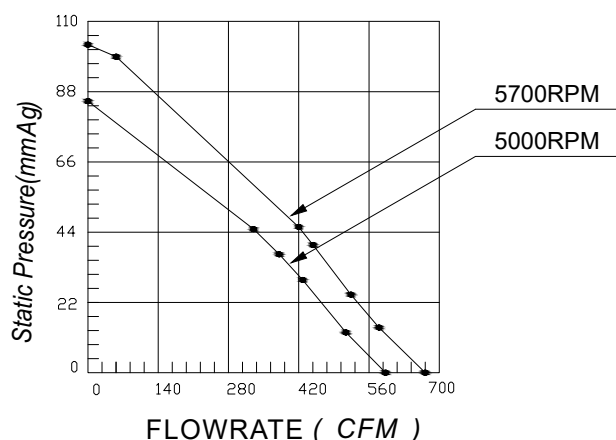

DIMENSIONS DRAWING(unit:mm)

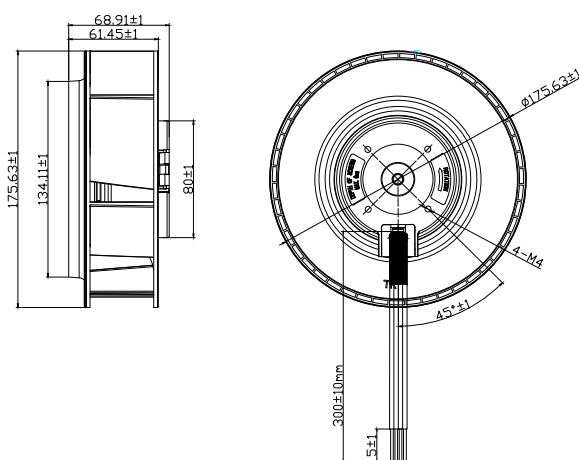

编码规则 Code Rule

UNIT: $\frac{mm}{(INCH)}$

例子 Example 12038H12B-1701
12038H12X-AY

Model No. is 12038H12X; Extro P/N code is AY

X means bearing type, can be S(sleeve bearing), can be B(ball bearing), can be Y(HY bearing), can be SU(sleeve with UL), can be BU(ball with UL), can be YU(HY with UL)

Y means special function code, it will be used for a certain parts no. or client.

产品型号 12038H12X; 附加代码 AY. X是一个不确定值, 它代表了不同的轴承类型,

S(含油轴承), B(滚珠轴承), Y(液压轴承), SU(含油轴承带UL), BU(滚珠轴承带UL), YU(液压轴承带UL)

Y是一个不确定的值, 它代表不同特殊风机功能, 由具体客户或者料号来确定

Model	P/N Code	Rated Voltage	Operationg Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Noise
型号	P/N 附加码	额定电压	工作电压范围	额定电流	额定输入功率	转速	最大风量		最大风压		噪音
PART.NO.	BY	VDC	VDC	Amp	Watt	R.P.M	M³/min	CFM	mmH2O	InH2O	dB-A
MG17569VH24X		24	18~26.5	5.0	120	5000	16.7	589.7	85.7	3.38	79
MG17569HV24X		24	18~26.5	7.6	182.4	5700	18.85	666	102.1	4.02	82.9
MG17569VH48X		48	36~54	2.5	120	5000	16.7	589.7	85.7	3.38	79
MG17569HV48X		48	36~54	3.8	182.4	5700	18.85	666	102.1	4.02	82.9