


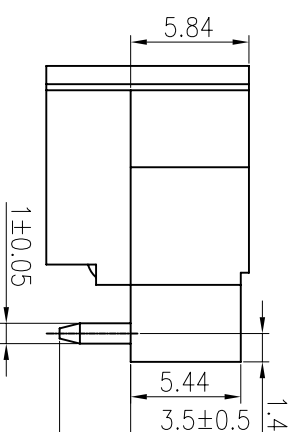


REVISION RECORD			
REV	ECO	DESCRIPTION	DFT DATE
		品名、料号增加环保标示“(H)”	LJH 12/11/07


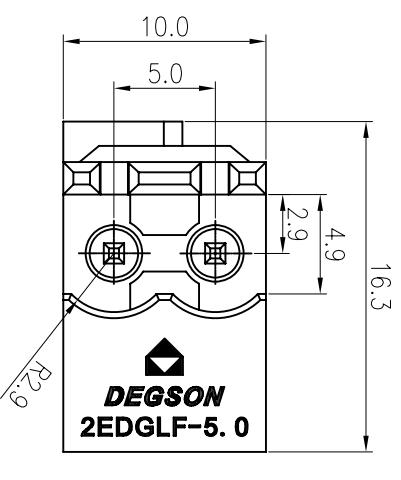


Notes:

1. pitch: 5.0mm poles: 2p
2. Rated voltage: 300V
3. Rated current: 15A
4. Withstanding voltage: AC2000V/1min
5. Insulation resistance: 5000M Ω /DC1000V
6. Temp. Range: -40 $^{\circ}$ C~+105 $^{\circ}$ C
7. Undimensioned Tolerances:

Pitch range in mm	Nominal dimension range in mm						—	
	over 6	over 10	over 30	over 60	over 100	over 150		
to 6	to 10	to 24	to 30	to 60	to 100	to 150	□	
10.10	10.15	10.25	0.2	0.3	0.5	0.7	1.0	0.005

1	2EDGLF-5. 0-02P-Housing	1090A0V02C (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DEGSON 宁波高电子有限公司 DEGSON ELECTRONICS CO., LTD					
DETACHED LISTS					
TOLERANCES EXCEPT AS NOTED		CHNO	DATE	DATE	DATE
MM		MM	MM	MM	MM
.0 ±		±			
.00 ±		±			
.000 ±		±			
ANGLES ± 1°		G.E. :			
		FINISH:			
THIRD ANGLE PROJECTION		SCALE : 1:1			
DO NOT SCALE DRAWING		SHEET 1 OF 1			

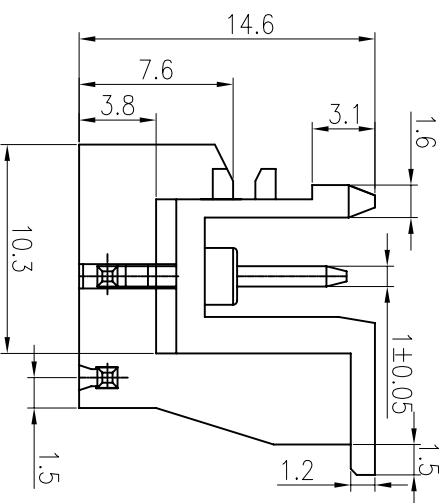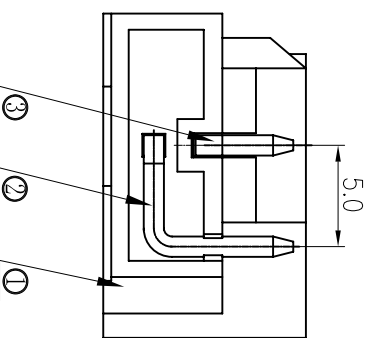

3	2EDGRF-5.0 pin1	1090B00010 (H)	1	Copper	SnCe
2	2EDGIF-5.0 pin2	1090B00050 (H)	1	Brass	SnCe