

	Part name	Ferrite Magnetic Speaker(Plastic)	Date	2026-09-10
	Part number	S-26-8R0.5W-CY03A	Edition	V2.0
	Department		Page	1 / 5

1.TEST CONDITION

Unless otherwise specified,The standard of range atmospheric conditions for making measurements and tests as follows

17 25 45% 85%RH 860HPA 1060HPA.

If there is no doubt about results,measurement shall be made with in the following limits.



20 ±3 60% 70%RH 860HPA 1060HPA.

2. SPECIFICATION OF SPEAKER MODE

2.1	Rated IMPEDANCE	8Ω±15%	At 1kHz
2.2	RESONANCE FREQUENCY	830 ±20%Hz	At 0.89V
2.3	Rated Power	0.5W	At 2V
2.4	MAX POWER	0.5W	At 2V
2.5	Outerput S.P.L	90±3dB at 0.1W/0.1M	At 0.6.0.8.1.0.1.2.1.5.2.0KHz average
2.6	Frequency response curve	F0 5KHz	Deviation -10db from average S.P.L
2.7	Rattle & Buzz	should not be audible buzz and rattle ()	Sine WAVE() at 2V/350~2KHz
2.8	Dostortion	≤ 5%THD	At 1kHz 0.1M/0.1W
2.9	Polarity	When a positive D.C current is applied to the voice coil terminal marked +,the diaphragm shall move forward.()	
2.1	Magnet Size	NdFeB	
2.11	Net Weight		


	Part name	Ferrite Magnetic Speaker(Plastic)	Date	2026-09-10
	Part number	S-26-8R0.5W-CY03A	Edition	V2.0
	Department		Page	2 / 5

3.ENVIRONMENTAL CHARACTERISTICS

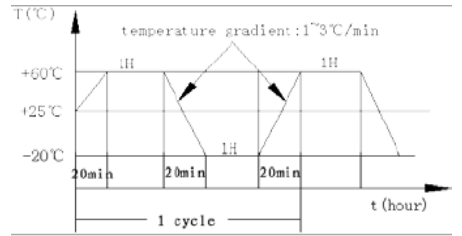
3.1	High temperature test	60±3 duration 48 hours ,then removal back to normal temperature for 2 hours +60±3 48 2
3.2	LOW temperature test	20±3 duration 48 hours ,then removal back to normal temperature for 2 hours -20±3 48 2
3.3	Humidity test	Temperature +40±3 relative humidity 90 95%, duration ,96 hours ,then removal back to normal temperature for 2 hours +40±3 90 95% 96 2
3.4	Load test	The products shall not be no sound/Buzz&Rattle/different volume/exceptional diversification of frequency response curve in testing and after testing process for a continuous working of 48H at a rated 0.5W white noise 0.5W 48 , /
3.5	Temperature cycle test	Temperature: -20 to +60±3 Duration : 2 hours Cycl :2cycle -20 2 +60 ±3 2 2 
3.6	Drop test	The speaker shall be dorp 5 times as shown in the figure and Cacophony must be normal 5 
3.7	Insulation resistance	A VOLTAGE OF 100V.d.c shall be applited for 1 min between a terminal and a frame ,after which measurement shall be made ,2MΩ OR MORE D C 100V 1 2MΩ
3.8	Vibration test	10-55Hz/min Amplitude 1.5mm Duration 2hours each axes
3.9	Operating temperature	20 TO+60
3.10	Storage temperature	25 TO+60

Part name	Ferrite Magnetic Speaker(Plastic)	Date	2026-09-10
Part number	S-26-8R0.5W-CY03A	Edition	V2.0
Department		Page	3 / 5

4.MEASURING CIRCUIT (SPEAKER) 测试回路 (喇叭模式)

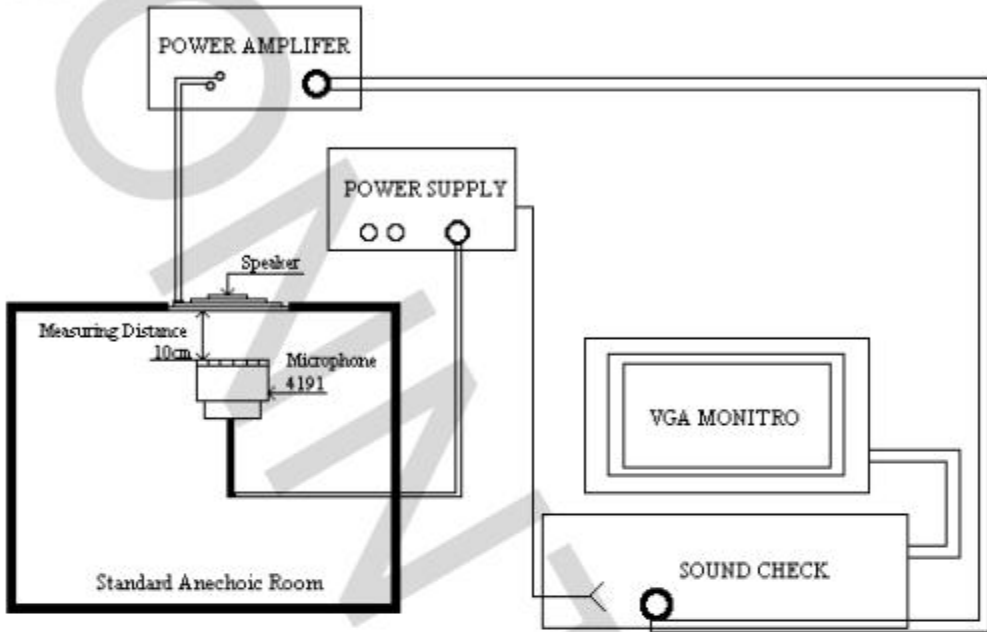


5.FREQUENCY CURVE (频响曲线图)

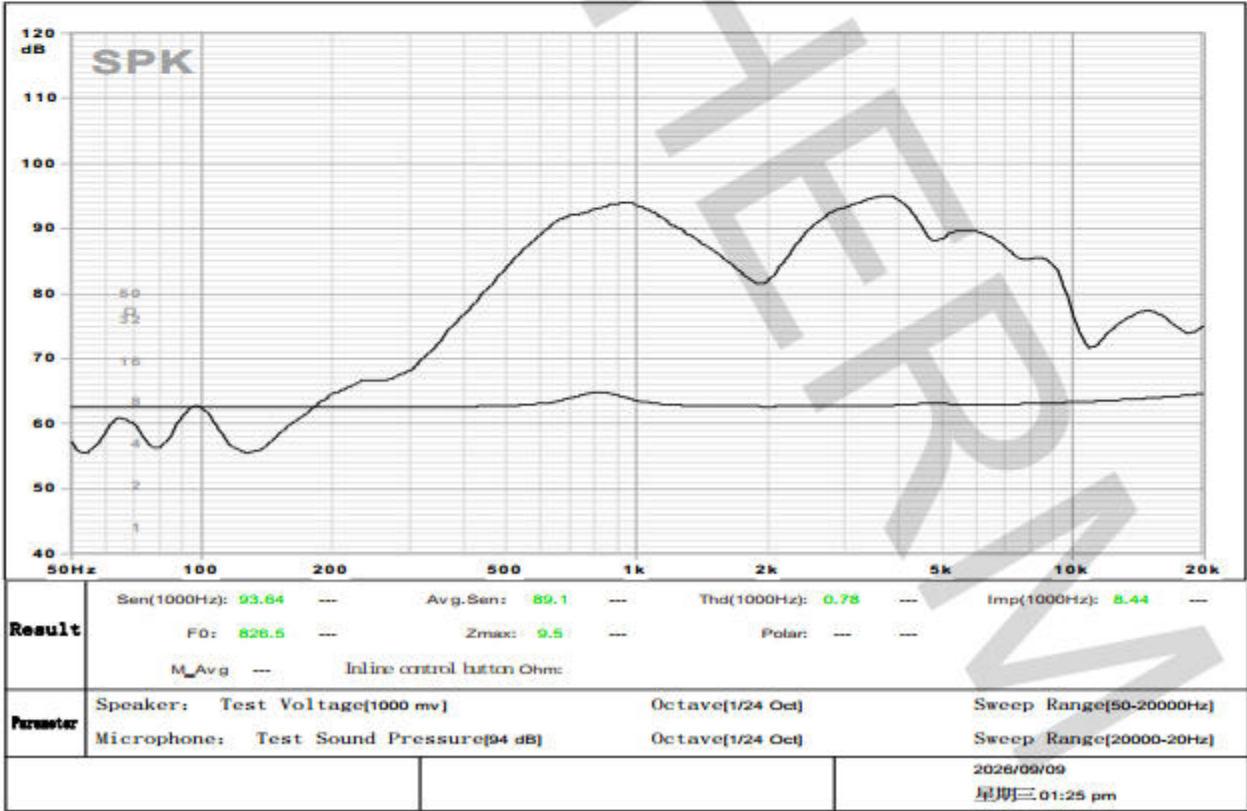

	Part name	Ferrite Magnetic Speaker(Plastic)	Date	2026-09-10
	Part number	S-26-8R0.5W-CY03A	Edition	V2.0
	Department		Page	4 / 5


6.DIMENSIONS

Unless otherwise specified, tolerance: ± 0.3 (unit: mm)

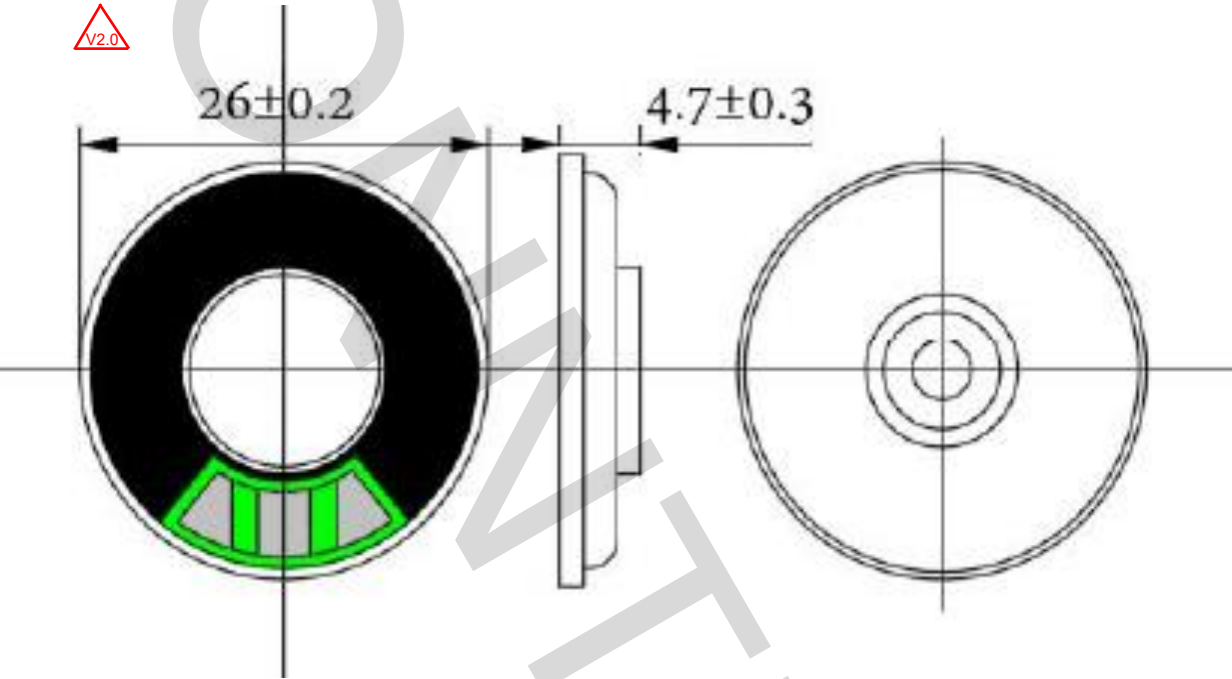

	Part name	Ferrite Magnetic Speaker(Plastic)	Date	2026-09-10
	Part number	S-26-8R0.5W-CY03A	Edition	V2.0
	Department		Page	5 / 5

7.PACKAGING PARAMETERS

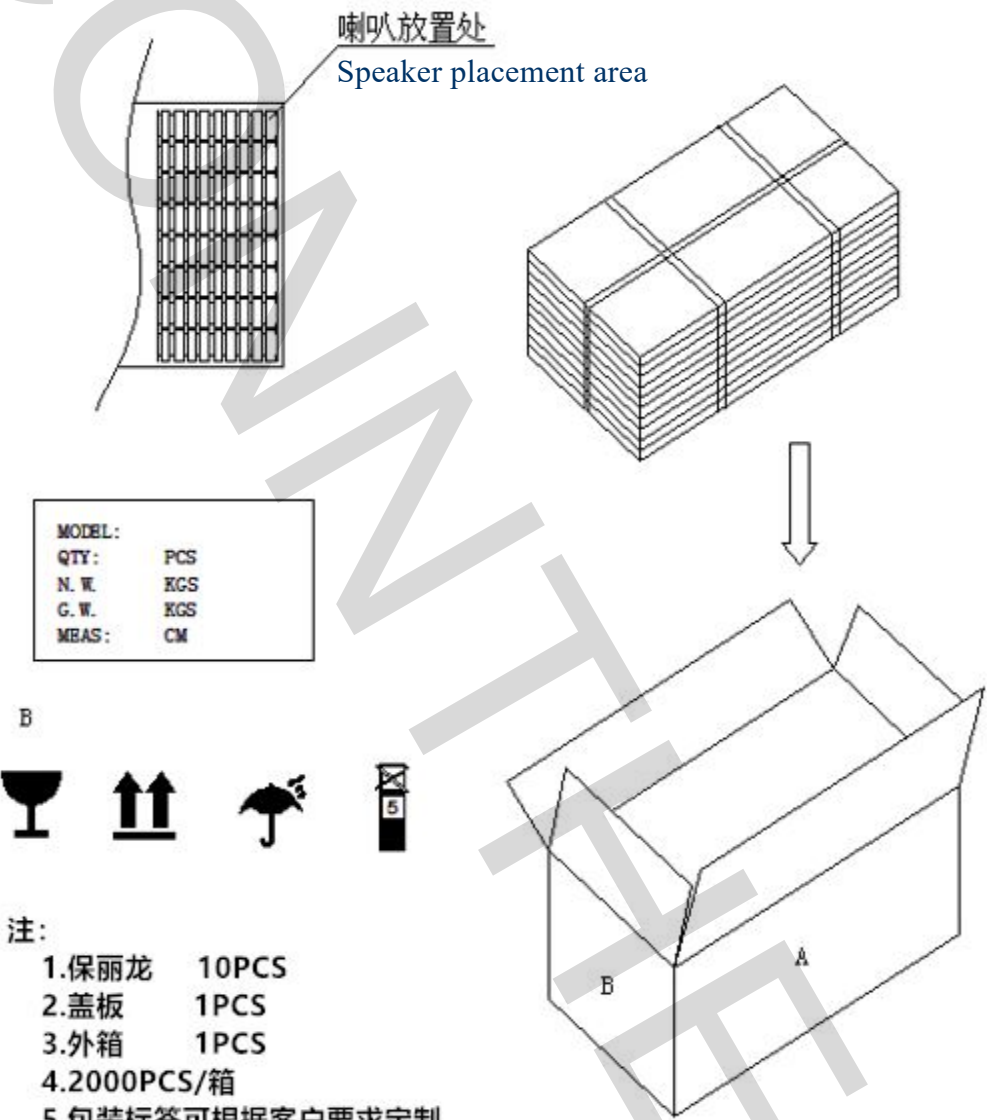

- Note:
- 1、Foam (Polystyrene): 10 PCS
 - 2、Cover Plate: 1 PCS
 - 3、Outer Carton: 1 PCS
 - 4、2000 PCS per carton
 - 5、Packaging labels can be customized according to customer requirements.