

1

2

3

4

REV.	ECN NO.	DATE
00	NEW	2018.10.10



SPECIFICATION NOTES:

ELECTRICAL:

- VOLTAGE RATING: 125 VAC RMS
- CURRENT RATING: 1.5 AMP
- CONTACT RESISTANCE: 20mΩ MAX.
- INSULATION RESISTANCE: 1000MΩ MIN. AT 500V DC.
- DIELECTRIC STRENGTH: 1000 V AC OR 1500V DC RMS AT 0.5mA 50 Hz / 60 Hz FOR 1 MINUTE

MECHANICAL:

- HOUSING: ABS UL94V-0 COLOR BLACK
 - CONTACT MATERIAL: DIA. PHOSPHORBRONZE $\theta=0.46\text{MM}$
 - PLATING: GOLD PLATING AT CONTACT AREA, NICKEL 30U MIN. OVER ALL
 - OPERATING LIFE: 750 CYCLES MIN.
 - MATING/UNMATING FORCE: 30N/3.06KG MAX.
 - RETENTION STRENGTH: 50N MIN. FOR 60S±5S
- ENVIRONMENTAL:
- STORAGE: 0°C TO +70°C RELATIVE HUMIDITY<80%
 - GARANTEE PERIOD: 6 MONTHS
 - OPERATION: 0°C TO +70°C
 - SALT WATER SPRAY: 24H

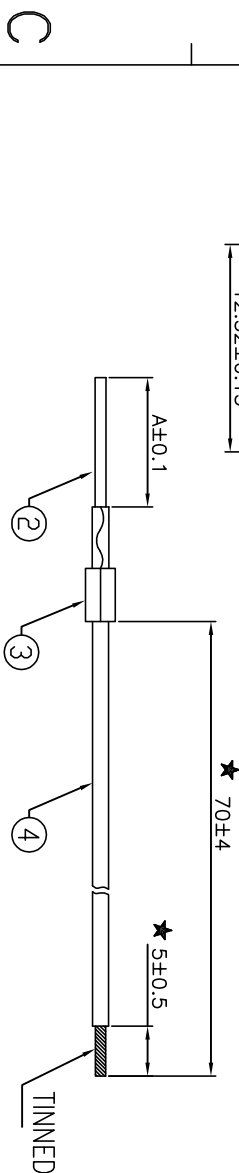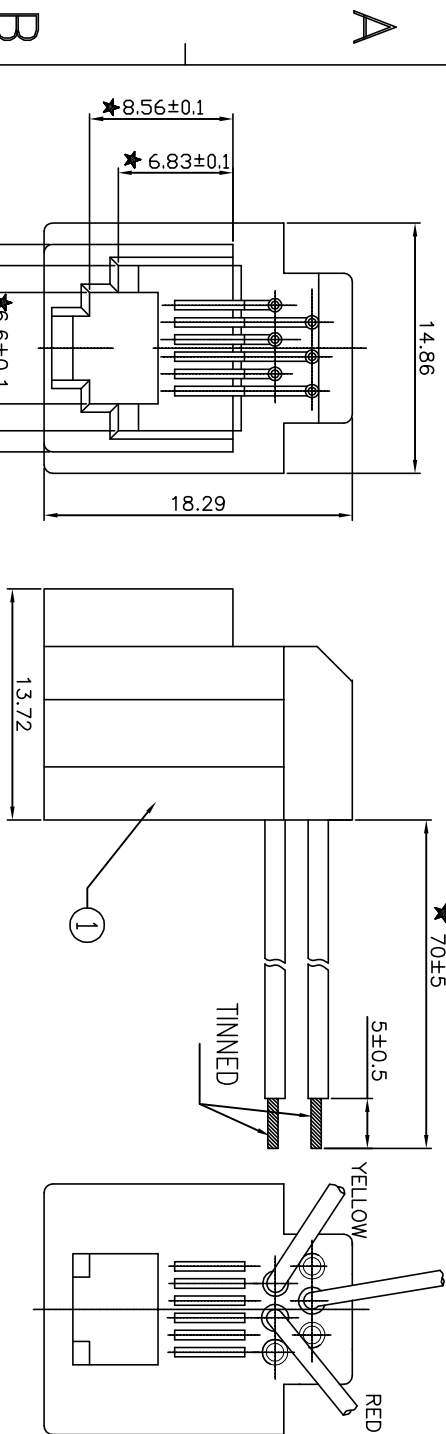

ROHS COMPLIANT

CZT® 温州克华连接件股份有限公司
WENZHOU YIHUA CONNECTOR CO., LTD

TOLERANCES

0-15 ±0.15
15-30 ±0.20
30-50 ±0.25
50~ ±0.30
ANGLES: ±1°

Material:
材质

SEE TABLE

Designed:
设计

林日进

NAME:

623KWIRED JACK 6P3C 3U

Finish:
电镀

SEE TABLE

Checked:
审核

DWG NO.

YZ3L1190

REV.
版本

SHEET

1 OF 1

Approved:
核准

PART NO.

10256264B016

REV.
版本



A4
SIZE

SCALE
1:1
UNIT
mm

CUSTOMER:
MODEL NO:

N/A
N/A

1

2

3

4

文件编号: 3KF-CP-3xxx