

REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
12	△	Add vehicle part number according to salesman requirement	2021.05.27	黃玉華
13	△	Add dimension mark of terminal contact point(N-N210905)	2021.09.02	郭康
14	△	Added Flatness Mark (N-N220639)	2022.06.21	郭康

Specifications

Current Rating:1.0Amp

Insulation Resistance:1000MΩMin.

Dielectric Withstanding Voltage:300VAC

Contact Resistance:20mΩMax.

Operating Temperature:-40°C to +105°C

Materials

△ Contact Material:Phosphor Bronze

△ Insulator Material:High Temperature

Thermoplastic, UL 94V-0 LCP

or the equivalent material


☆ All materials must meet Greenconn hazardous substances control standards.

"★": Critical Characteristics.

indicates product characteristics, functionalities, and manufacturing processes regarding to customer's specifications

"☆": Safety Features

indicates product characteristics, functionalities, and manufacturing processes complying to legal regulations stated by local government

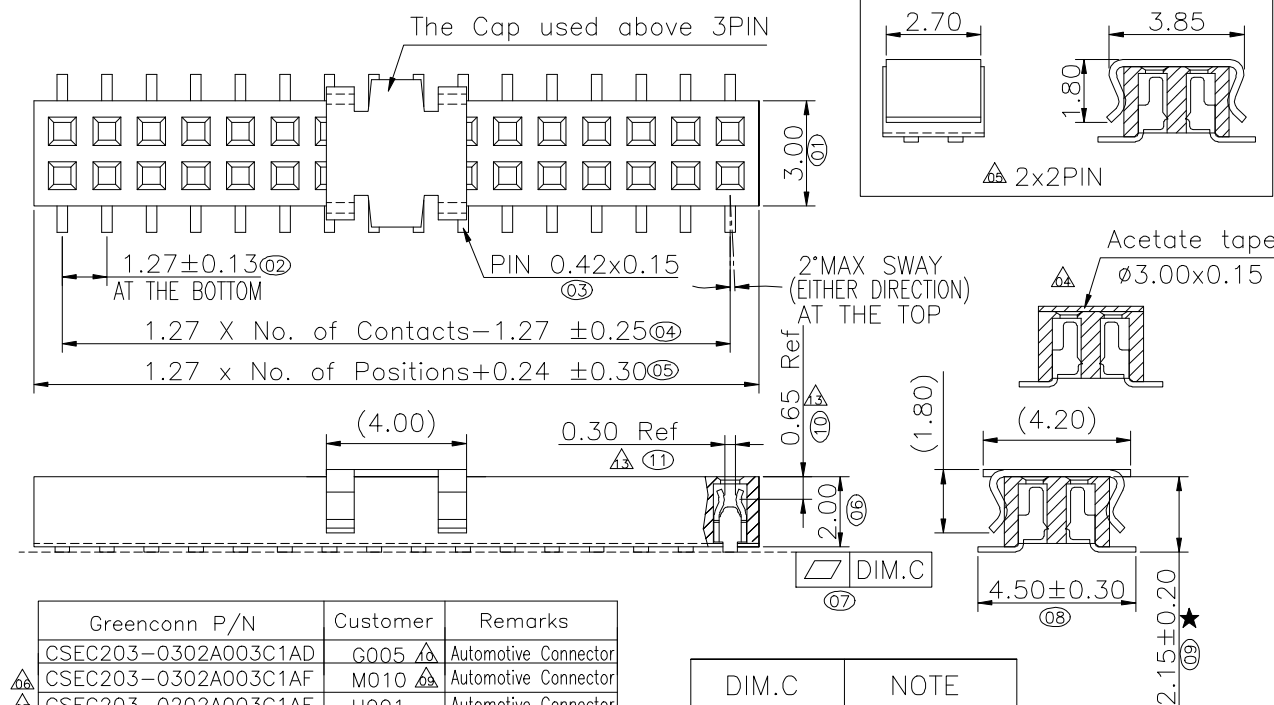

Ordering Information

C SEC203 - XX XX A 003 C 1 A X


No. of Pins per Row
02~40

Standard Plating
02=Gold Flash
Selective Plating
01=Tin
05=Gold Flash/Tin


Color
1=Black

Standard Packing
C=Tube(03~40pin)
Selective Packing
A=box
E=Cap+Tube
F=Cap+Tape&Reel
G=Acetate tape+Tube(03~40pin)
H=Acetate tape+T&R

Recommended P.C.Board Layout
FOR TOP ENTRY
(Tolerance:±0.05)



Recommended P.C.Board Layout
FOR BOTTOM ENTRY
(Tolerance:±0.05)

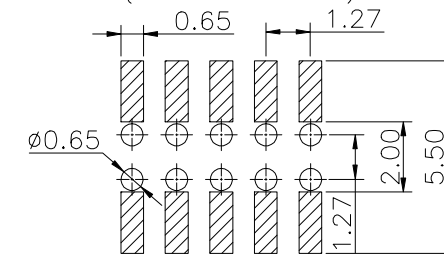

Website:www.greenconn.com E-mail:sales@greenconn.com			3RD.ANG PROJ. PAGE. 1/1	GENERAL TOLERANCE X:±5.0° X:±0.30 .X:±3.0° .X:±0.25 .XX:±2.0° .XX:±0.15 .XXX:±1.0° .XXX:±0.10		DESIGNED: 郭康 DATE: 2022.06.21	DWG. NO. △ CSEC203-CA3CA PART NO. CSEC203-XXXX A003C1AX	TITLE. 1.27 FEMALE HEADER DUAL ROWS SMT TYPE CONNECTOR
REV. 14	UNIT. mm	SCALE. 5:1				CHECKED: 張春連 DATE: 2022.06.21		
						APPROVED: 邱國延 DATE: 2022.06.21		