


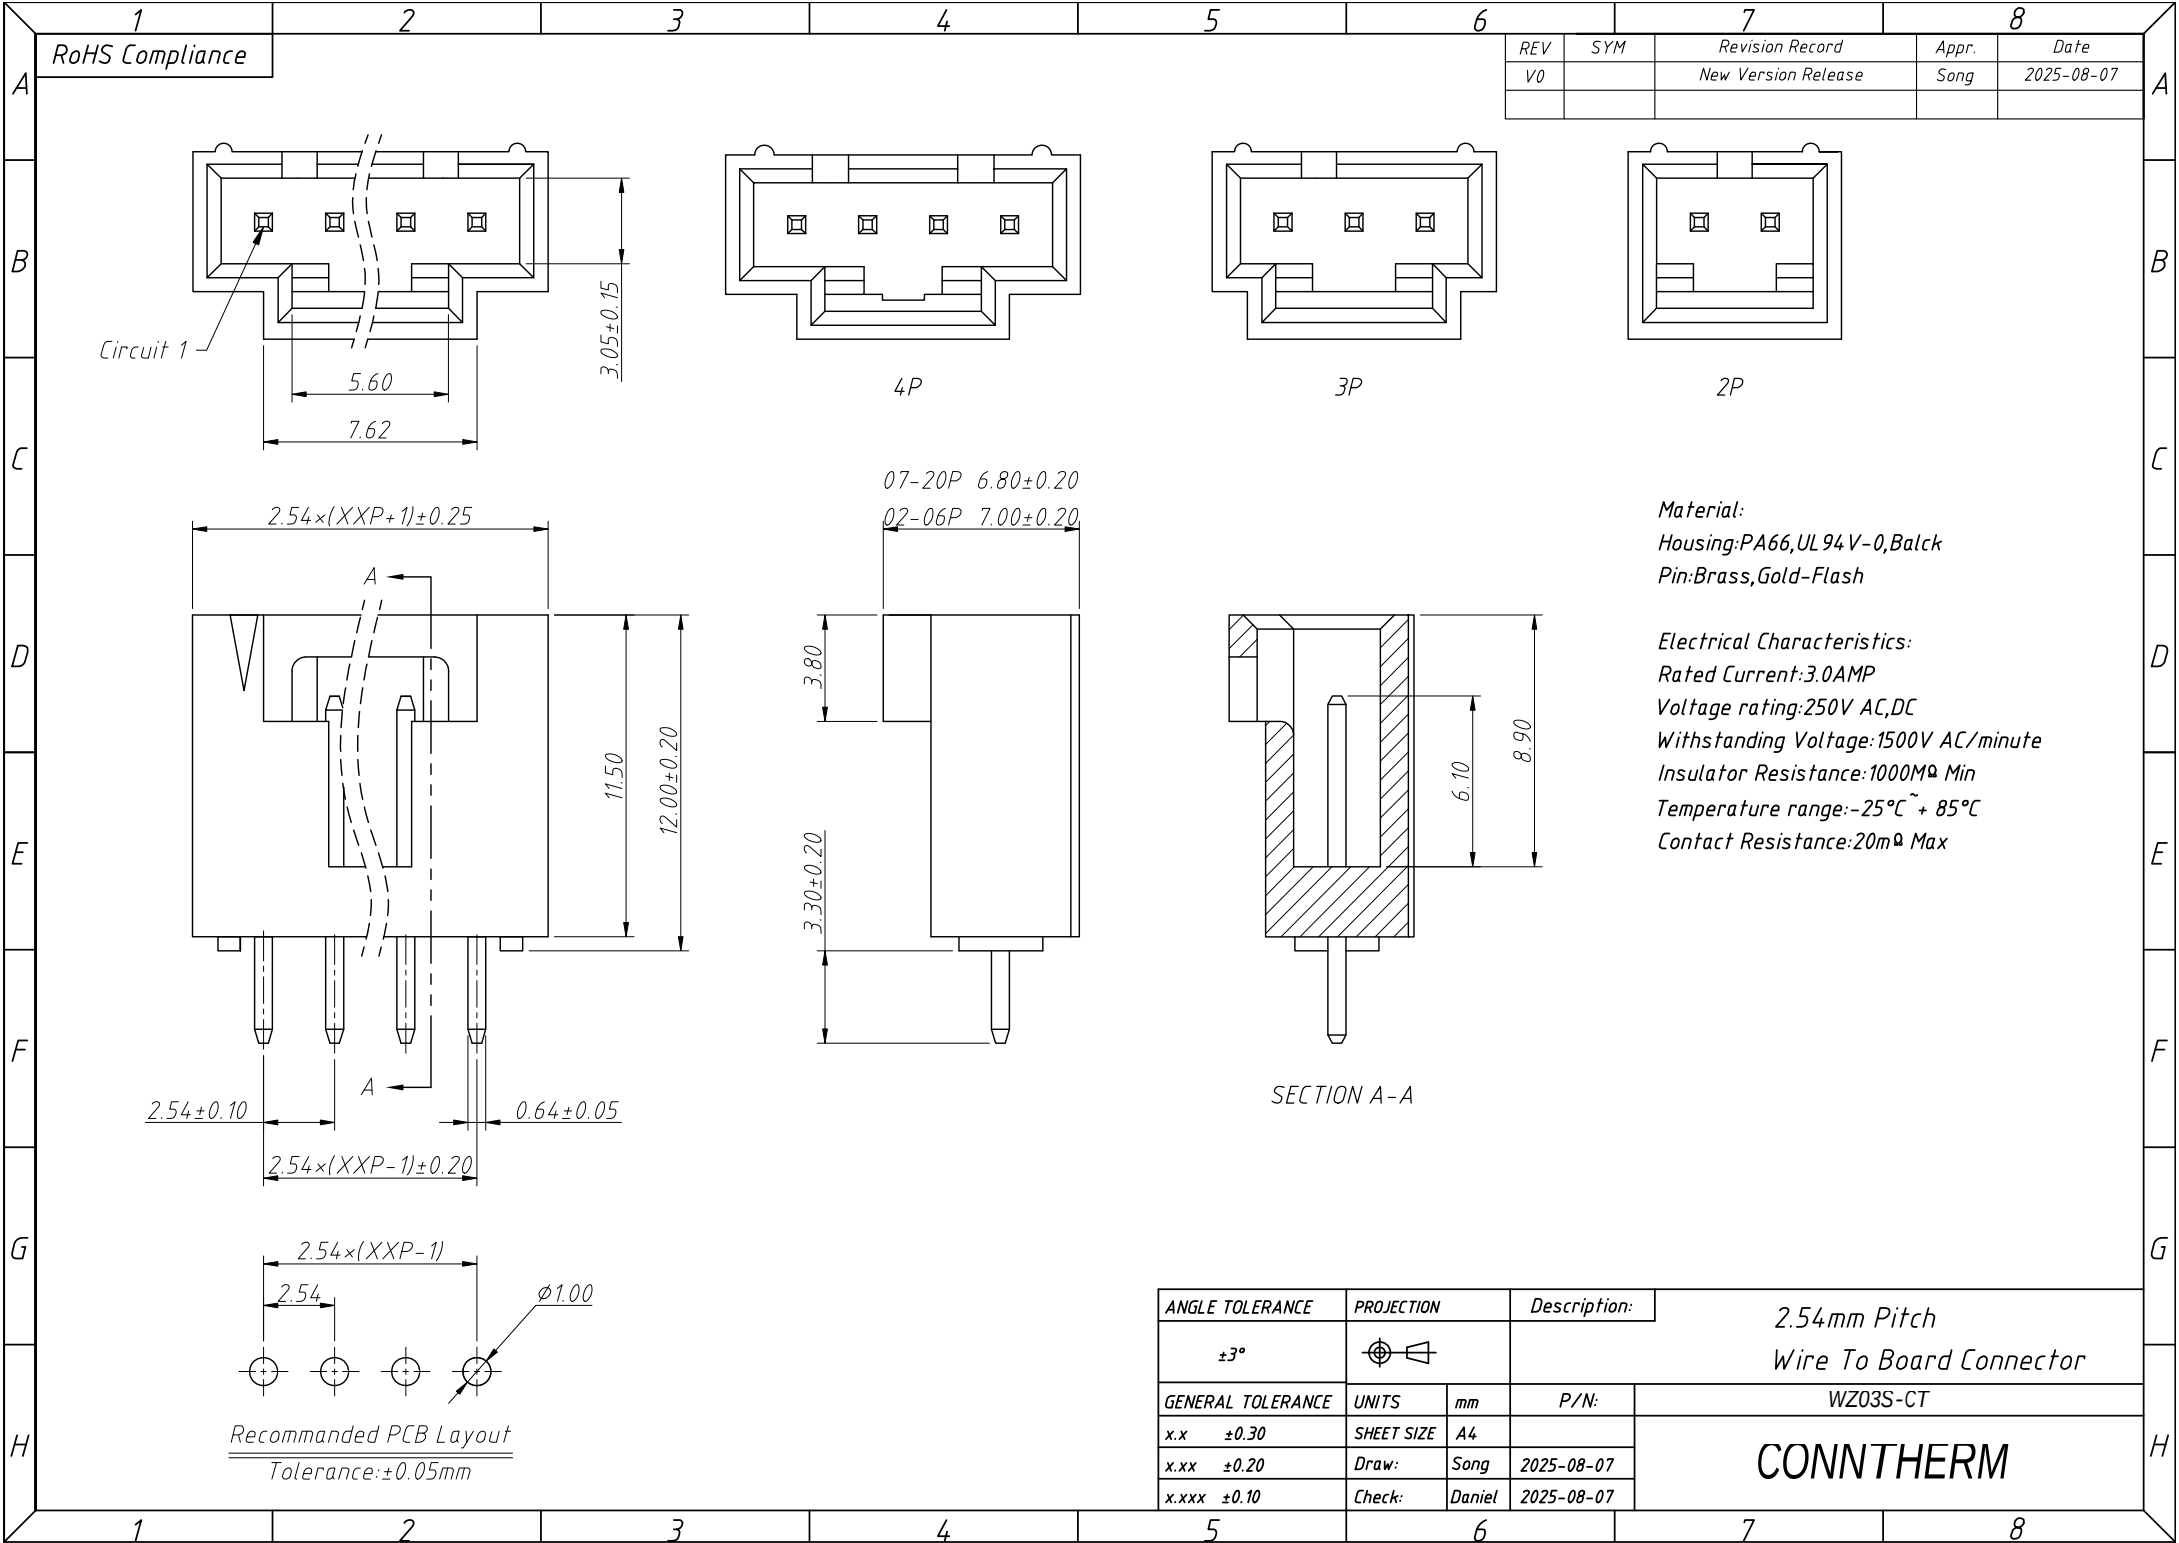

1
RoHS Compliance

6		7		8	
REV	SYM	Revision Record		Appr.	Date
V0		New Version Release		Song	2025-08-07

Material:
Housing:PA66,UL94 V-0,Balck
Pin:Brass,Gold-Flash

Electrical Characteristics:
Rated Current:3.0AMP
Voltage rating:250V AC,DC
Withstanding Voltage:1500V AC/minute
Insulator Resistance:1000M Ω Min
Temperature range:-25 $^{\circ}$ C ~ + 85 $^{\circ}$ C
Contact Resistance:20m Ω Max

ANGLE TOLERANCE		PROJECTION		Description:	
$\pm 3^{\circ}$				2.54mm Pitch Wire To Board Connector	
GENERAL TOLERANCE		UNITS	mm	P/N:	WZ03S-CT
x.x	± 0.30	SHEET SIZE	A4		CONN THERM
x.xx	± 0.20	Draw:	Song	2025-08-07	
x.xxx	± 0.10	Check:	Daniel	2025-08-07	