

SPECIFICATION FOR APPROVAL 承认书	PAGE NO. 页码	1/5
	PART . NO. 产品型号	S-20-8R1W-CY02B

A、适用范围 SCOPE

This specification applies speaker, **S-20-8R1W-CY02B**


此规格书适用于喇叭, **S-20-8R1W-CY02B**

B、GENERAL SPECIFICATIONS 一般规格


NO.	Item	Symbol	Unit	Specification	Condition
1	Dimension 尺寸		mm	$\phi 20 \times 4.0H$	
2	Rate/Max Power Rating 额定/最大功率		W	Rate 1/Max1.2	Max. Power: IEC-60268-5 Filter 60s On/120s Off 10 Cycles (Room TEMP.)
3	Impedance 阻抗	Ω	Ohm	$8 \pm 15\%$	
4	Resonance Frequency 谐振频率	Fo	Hz	$990 \pm 20\%$	At 1.0V
5	Output S.P.L 输出音压	S.P.L	dB	$85 \pm 3dB$	0.1W/0.1M at 1.0K, 1.2K, 1.5K, 2.0KHz average
6	Frequency Range 有效频宽		Hz	Fo—20kHz	Output S. P. L -10dB 输出音压-10dB
7	Max Distortion 最大失真		%	7%	At 1.0KHz 0.1W/0.1M
8	Magnet Material 磁铁材质			Nd-Fe-B	
9	Storage temp 贮存温度		℃	-20~+ 55℃	
10	Operating temp 工作温度		℃	-20~+ 55℃	
11	Buzz&Rattle 异常音				Not be audible at 2.83V sine wave between Fo~4.0KHz 输入 2.83V 正 弦波 Fo 到 4.0KHz 之间无异 常音
12	Protection Regulation 环保法规			RoHS	

SPECIFICATION FOR APPROVAL 承认书	PAGE NO. 页码	2/5
	PART . NO. 产品型号	S-20-8R1W-CY02B

C、TYPICAL FREQUENCY RESPONSE CURVE 频率响应曲线

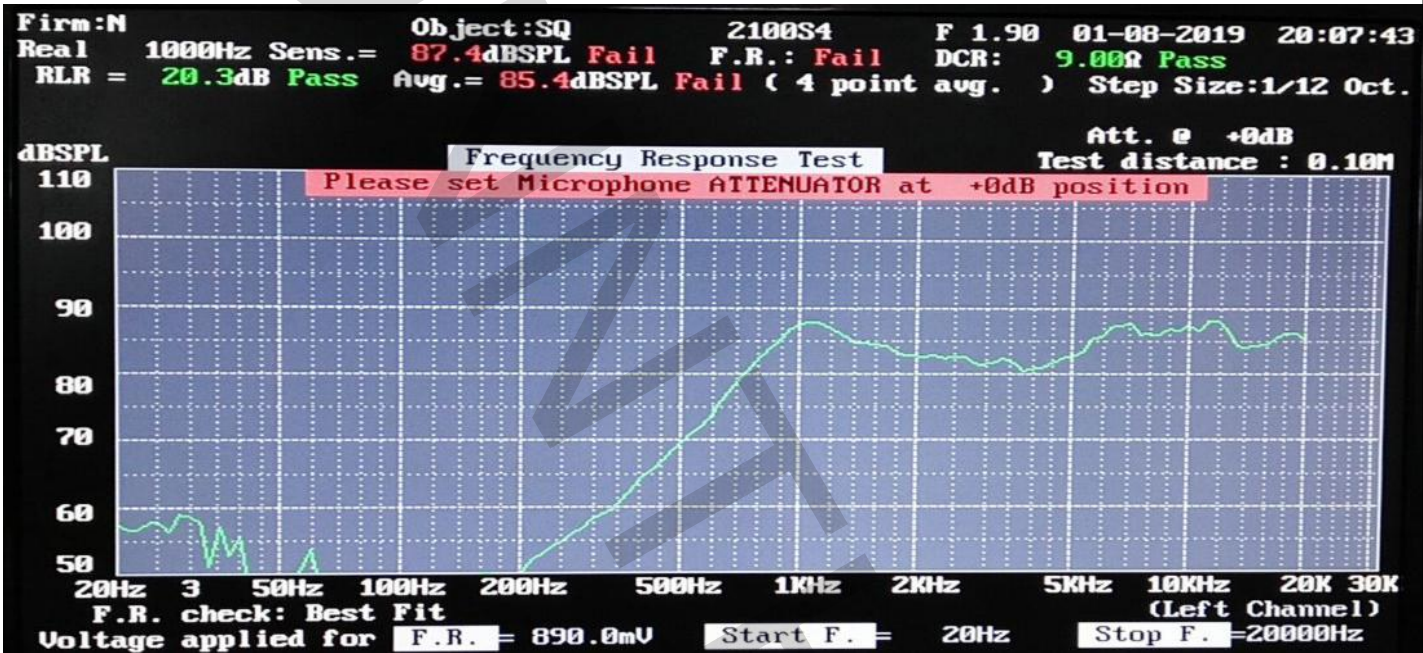

D、MEASUREMENT CIRCUIT 测量线路

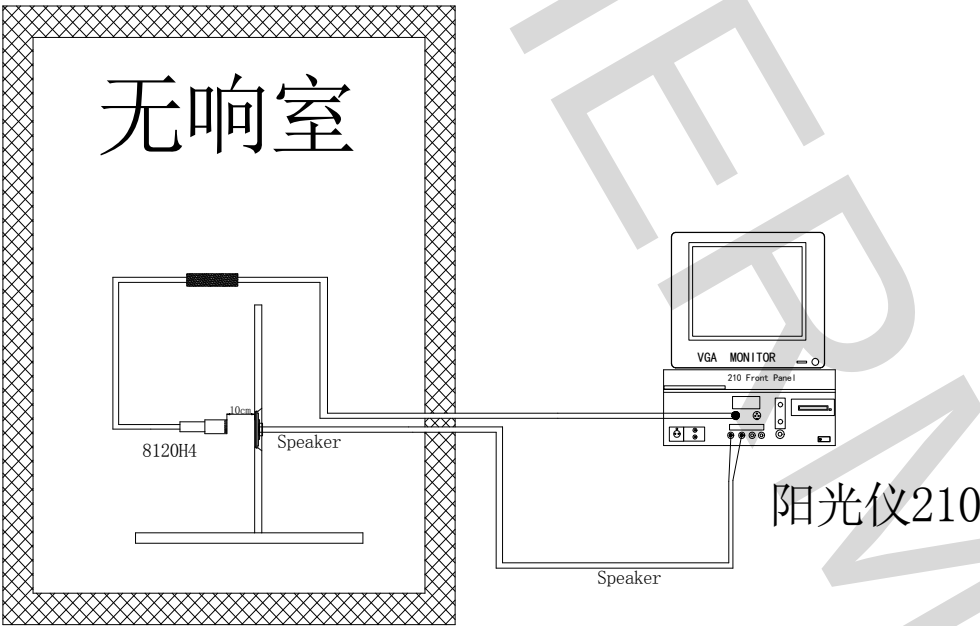

5. 5M*5. 5M*H3M(长宽高)

SPECIFICATION FOR APPROVAL

PAGE NO.

页码

3/5

承认书

PART. NO.

产品型号

S-20-8R1W-CY02B

E、MECHANICAL CHARACTERISTICS 机械特性

NO	Item	Test condition	Evaluation standard
1	Vibration Test 振动测试	Speaker shall be measured after being applied vibration of amplitude of 1.5mm with 10 to 55Hz band of vibration frequency to each of 3 perpendicular directions for 2 hours. 振动周波数 10~55Hz, 全振幅 1.5mm 于 X, Y, Z 3 个方向各 2 个小时	No obstacle to be harmful to normal operation ; Damages, cracks, rusts and distortions. Should not be audible at 2.83V sinewave between FO~4.0kHz
2	Drop Test 跌落测试	Drop the speakers contained in normal box onto the board 40mm thick 10 times from the height of 75cm 将扬声器置于盒中, 自 75 公分高度落在 40mm 的木板上共 10 次	测试后无任何障碍妨碍正常操作, 且在输入 2.83V 正弦波从 Fo 到 4.0KHz 之间无异常音。
3	Solderability 焊锡附着性 (connector excepted) 端子类不适合用此项	Stripped wire of lead wire are immersed in rosin For 5 seconds and then immersed in solder bath Of $270 \pm 5^{\circ}\text{C}$ for 3 ± 0.5 seconds. 裸线部分浸入松香溶液 5 秒后, 再浸入 $270 \pm 5^{\circ}\text{C}$ 熔融焊锡槽 3 ± 0.5 秒,	90% min. stripped wires shall Be wet with solder.(Except the edge of terminal). 浸入裸线部分附着焊锡 90% 以上。(末端断面不算)
4	Lead Wire Pull Strength 线材拉力	The pull force shall be applied to double lead wire: Horizontal: 3.0N(0.306KG) for 30 seconds; Vertical: 2.0N(0.204KG) for 30 seconds. 双线材水平方向施以 3.0N(0.306KG) 的力量; 垂直方向施以 2.0N(0.204KG) 的力量, 各 30 秒	No damage and cutting off 线材不松动, 不脱落

SPECIFICATION FOR APPROVAL

承认书

PAGE NO.

页码

4/5

PART . NO.

产品型号

S-20-8R1W-CY02B

F、RELIABILITY TEST 信赖性试验


NO	Item	Test conditions	Evaluation standard
1	Load test 连续负荷	1W white noise is applied for 24 hours,at room temp. 在室温下,输入功率 1W,白杂音连续操作 24 小时	Being pAced for 1 hours at +25 °C ,speaker shall be measured,No obstacle to be harmful to normal operation;damages,cracks,rusts,etc.should not be audible at 2.83v sine wave between Fo~4.0KHz.Fo should meet intial one.S.P.L.deviation of unit should be within±3dB 经测试后,静置于+25℃环境中 1 小时后,测试无任何障碍妨碍正常操作,且在输入 2.83V 正弦波从 Fo 到 4.0KHz 之间无异常音,Fo 与原规格值相同,输出音压变化量在 ±3dB

G、ENVIRONMENTAL TEST 环境试验

No.	Item	Test conditions
1	High temp. test 高温测试	After being pAced in a chamber at +55°C for 48 hours. 置于+55℃环境中 48 小时
2	Low temp. test 低温测试	After being pAced in a chamber at - 20°C for 48 hours. 置于-20℃环境中 48 小时
3	Humidity test 相对湿度测试	After being pAced in a chamber at +40°Cand 90±5% reActive humidity for 48 hours.置于+40℃,相对湿度 90±5%环境中 48 小时
4	Temp. cycle test 温度循环测试	Low temperature -20 °C ±2°C (2 hour) / high temperature +55±2°C (2 hour) : 1 cycle , total 10 cycles. Being pAced for 6 hours at +25 °C ,receiver shall be measured. No obstacle to be harmful to normal operation ;damages, cracks, rusts and distortions, should not be audible at 2.83Vsine wave between Fo~4.0KHz. S. P. L. deviation of unit should be within ±3dB. 低温 (-20±2℃) 2 小时/高温 (55±2℃) 2 小时, 1 次循环, 10 个周期; 经测试后,静置于+25℃环境中 6 小时后,测试后无任何障碍妨碍正常操作,在输入 2.83V 正弦波从 Fo 到 4.0KHz 之间无异常音,Fo 与原规格值相同,输出音压变化量在 +3dB 内。

SPECIFICATION FOR APPROVAL 承认书	PAGE NO. 页码	5/5
	PART . NO. 产品型号	S-20-8R1W-CY02B

H、APPEARANCE DRAWING 外观尺寸图

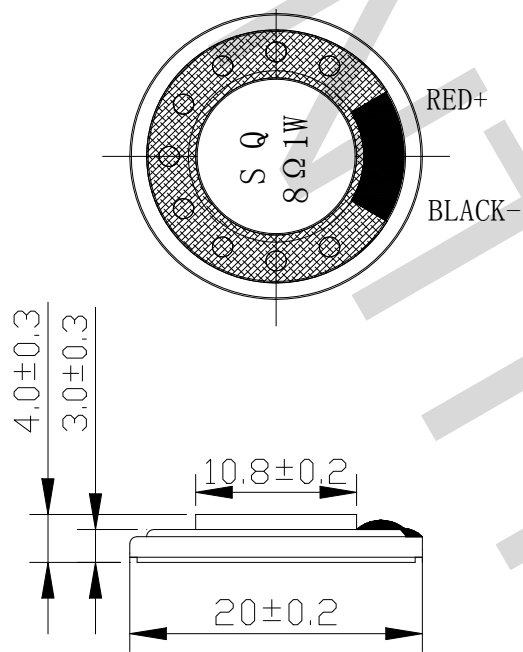

Unit: mm