



Copying of this document and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of a patent or the registration of the utility model or design.

Amphenol Global ID	Product Group	Product Type	Function	Additional Information	Color
2CMA100591R1000	Tough&Safe	ABB532P6W	Plug	3P+N+E	Red
Rated Current	Rated Voltage	Clock position	Frequency	Degree of Protection	Housing Material
30A   32A	200/346 - 240/415 V	6 h	50 Hz   60 Hz	IP67   IP69	Thermoplastic (PBT)
Cable Cross Section	Wire Size	ConnectionType	Mounting Holes	Plug Angle	Product Weight
2.5 - 6 mm <sup>2</sup>	14 - 10 AWG	Screw		Straight	0.475 Kg

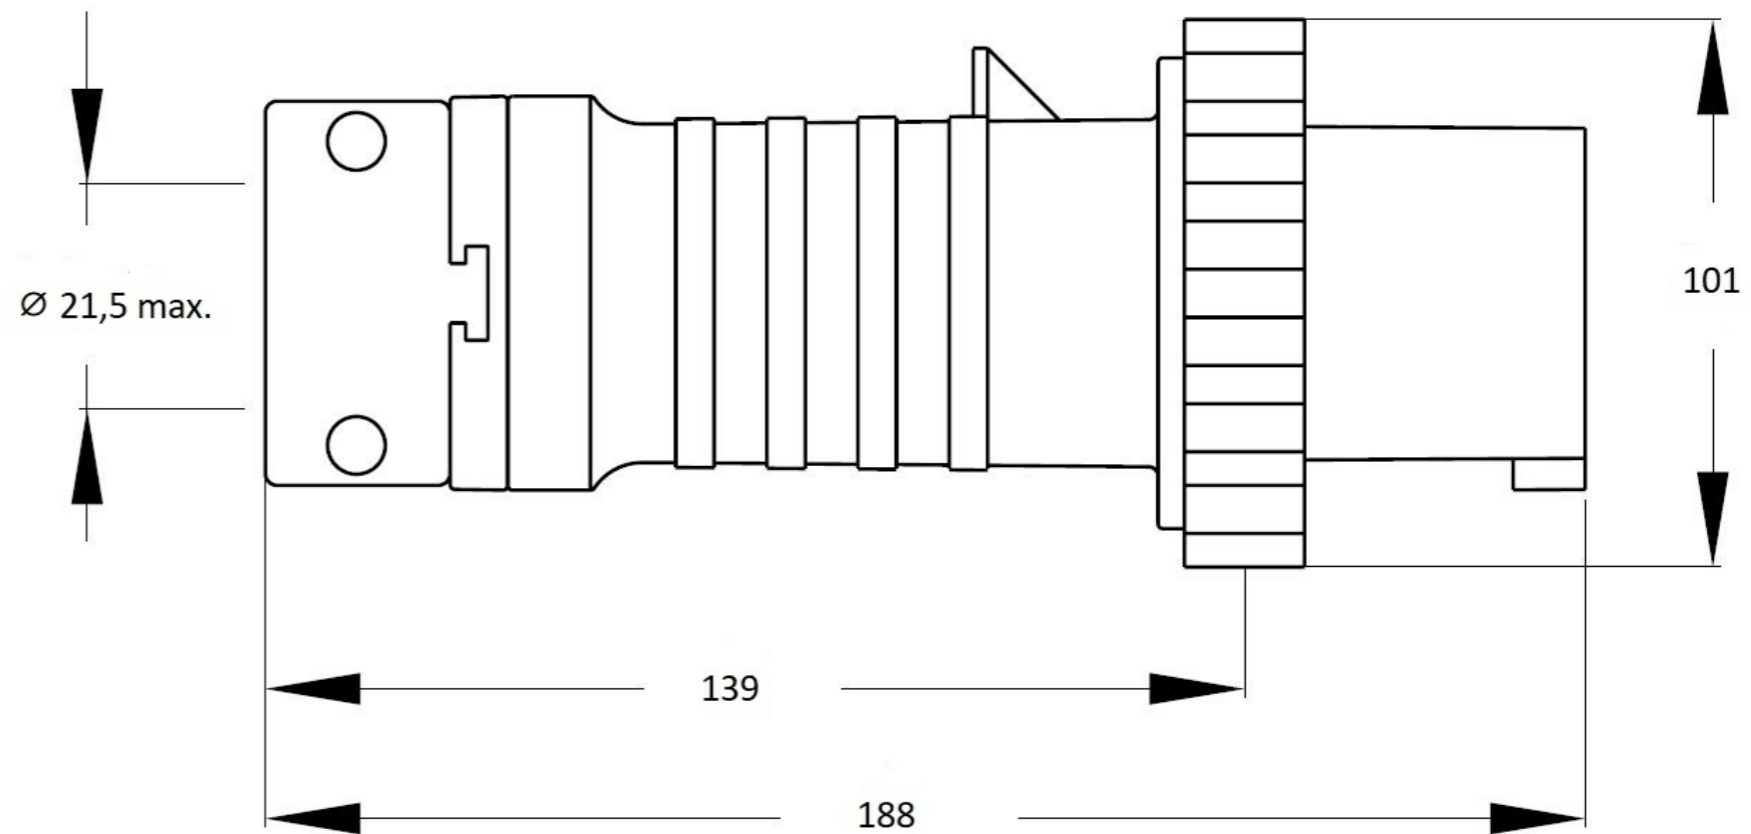

All dimensions are in mm.

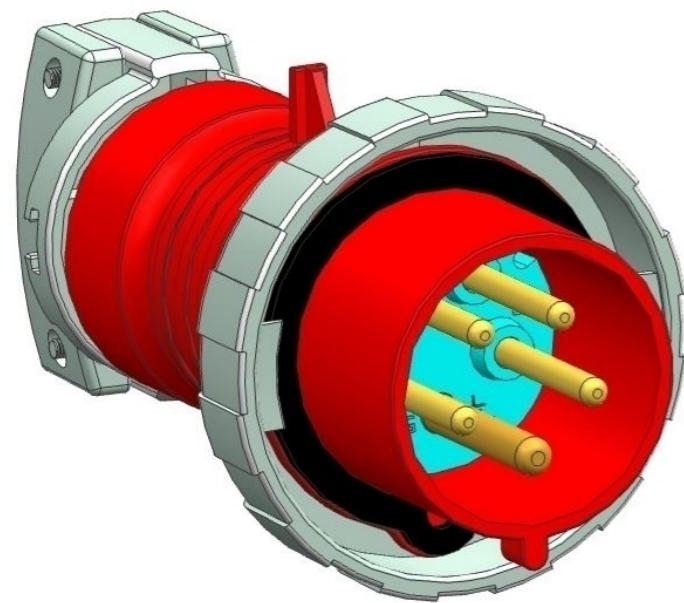

IEC 60309

Gewicht (errechnet) / Calc WT: 475 g		Zul. Abw./Tolerances:		Maßstab / Scale: 1:1		A3	
Prüfmaß / Testdimension		ISO 2768-m		DIN / ISO 13715		CUSTOMER DRAWING	
Teileindex / Partindexnumber:		minor change:		Gez. 06.09.2024		WBENHASSINE	
				Status Released		ABB532P6W	
				Gepr. 23.10.2024		Industrial Plug	
				Checked MBERTSCH			
				<b>Amphenol Tuchel Industrial GmbH</b>		Blatt/Sheet 1	
01 2024-00052		19.09.2025 WBEN		M 2CMA100591R1000		1 Bl.	
Index Änderung/Description		Datum/Date Name		Ers. f. / Replacement for:		NXM-V01	

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten.

FAI2024-004211  
NXM-V01