


DC Brushless Blower 120x120x38mm-EType


轴承结构: 双滚珠、含油、液压、其他
Bearing: two ball、sleeve、HY、other
框外材质: 塑料(等级:UL94V-0)
Frame:Plastic(Flammability:UL94V-0)
扇叶材质:塑胶:(等级:UL94V-0)
Impeller:Plastic:(Flammability:UL94V-0)
风扇单重:300g(WeigMG:300g)



P@Q CURVE(AT RATEDVOLTAGE)

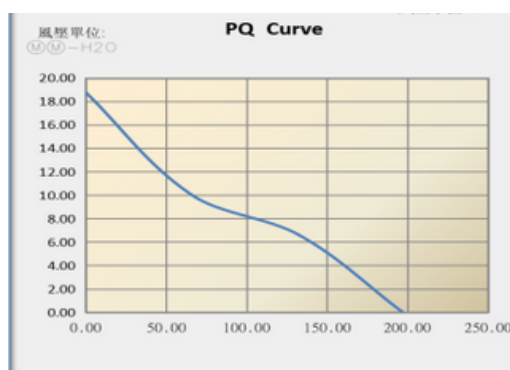

DIMENSIONS DRAWING(unit:mm)

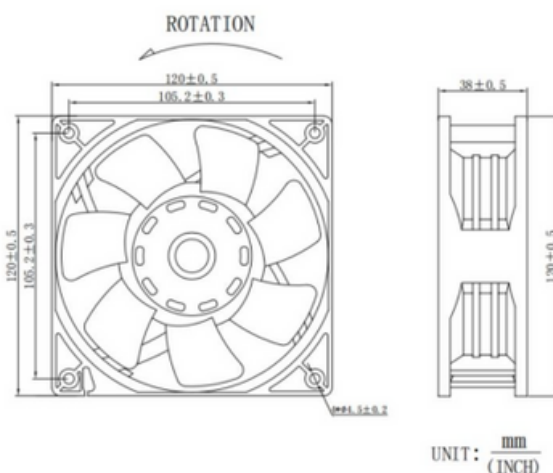

编码规则 Code Rule

Example 12038H12B-1701
12038H12 X-AY

Model No.is 12038H12 X: Extro P/N code is AY.

X means bearing type,can be S(sleeve bearing),can be B(ball bearing),can be Y(HY bearing),can be SU(sleeve with UL),can be BU(ball with UL),can be YU(HY with UL).

Y means special function code,it will be used for a certain parts no. or client.

产品型号 12038H12X;附加代码 AY。

X是一个不确定值它代表了不同的轴承类型S(含油轴承)B(滚珠轴承),Y(液压轴承),SU(含油轴承带UL),BU滚珠轴承带UL)YU(液压轴承带UL)。

Y是一个不确定的值,它代表不同特殊风机功能,由具体客户或者料号来确定。

Model	P/N Code	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Noise
型号	P/N 附加码	额定电压	工作电压范围	额定电流	额定输入功率	转速	最大风量		最大风压		噪音
PATR.NO.	EY	VDC	VDC	Amp	Watt	R.P.M	m3/min	CFM	mmH2O	InH2O	db-A
MG12038L12X		12	7.5-13.5	0.8	9.6	3500	4.984	172.96	14.64	0.576	49.8
MG12038M12X		12	7.5-13.5	1.3	15.6	4000	5.577	197.09	18.78	0.739	55.0
MG12038H12X		12	7.5-13.5	1.7	20.4	4500	6.342	224.1	23.81	0.938	58.0
MG12038HH12X		12	7.5-13.5	3.5	42	5000	6.896	243.71	26.97	1.062	61.0
MG12038VH12X		12	7.5-13.5	4.8	57.6	5500	7.423	262.3	29.9	1.178	67.8
MG12038L24X		24	18-26.5	0.4	9.6	3500	4.984	172.96	14.64	0.576	49.8
MG12038M24X		24	18-26.5	0.65	15.6	4000	5.577	197.09	18.78	0.739	55.0
MG12038H24X		24	18-26.5	0.85	20.4	4500	6.342	224.1	23.81	0.938	58.0
MG12038HH24X		24	18-26.5	1.75	42	5000	6.896	243.71	26.97	1.062	61.0
MG12038VH24X		24	18-26.5	2.4	57.6	5500	7.423	262.3	29.9	1.178	67.8
MG12038L48X		48	36-54	0.2	9.6	3500	4.984	172.96	14.64	0.576	49.8
MG12038M48X		48	36-54	0.32	15.6	4000	5.577	197.09	18.78	0.739	55.0
MG12038H48X		48	36-54	0.43	20.4	4500	6.342	224.1	23.81	0.938	58.0
MG12038HH48X		48	36-54	0.87	42	5000	6.896	243.71	26.97	1.062	61.0
MG12038VH48X		48	36-54	1.2	57.6	5500	7.423	262.3	29.9	1.178	67.8