
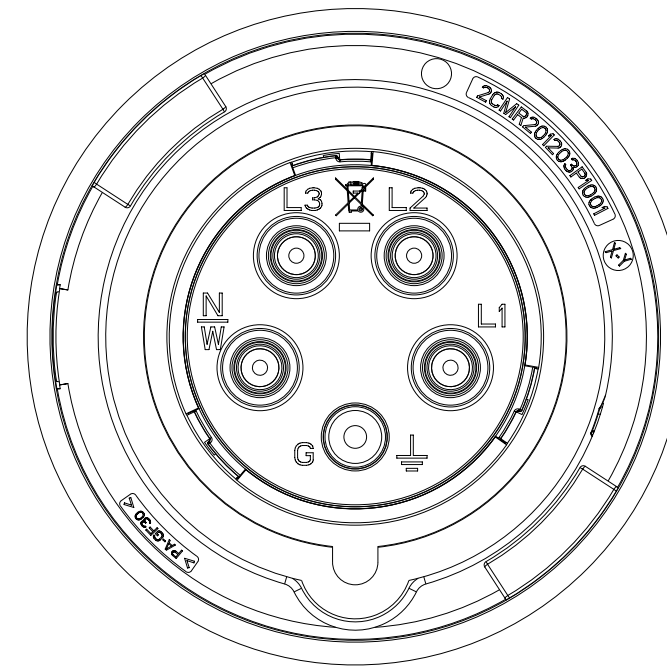


Amphenol Global ID	Product Group	Product Type	Function	Additional Information	Color
2CMA101089R1000	Easy&Safe	416EP6W	Plug	3P+N+E	Red

Rated Current	Rated Voltage	Clock position	Frequency	Degree of Protection	Housing Material
16 A	200/346 - 240/415 V	6 h	50 Hz 60 Hz	IP67	Plastic (PA)

Cable Cross Section	Wire Size	ConnectionType	Mounting Holes	Plug Angle	Product Weight
1 - 2.5 mm ²	14 - 12 AWG	Screw		Straight	0.21 Kg

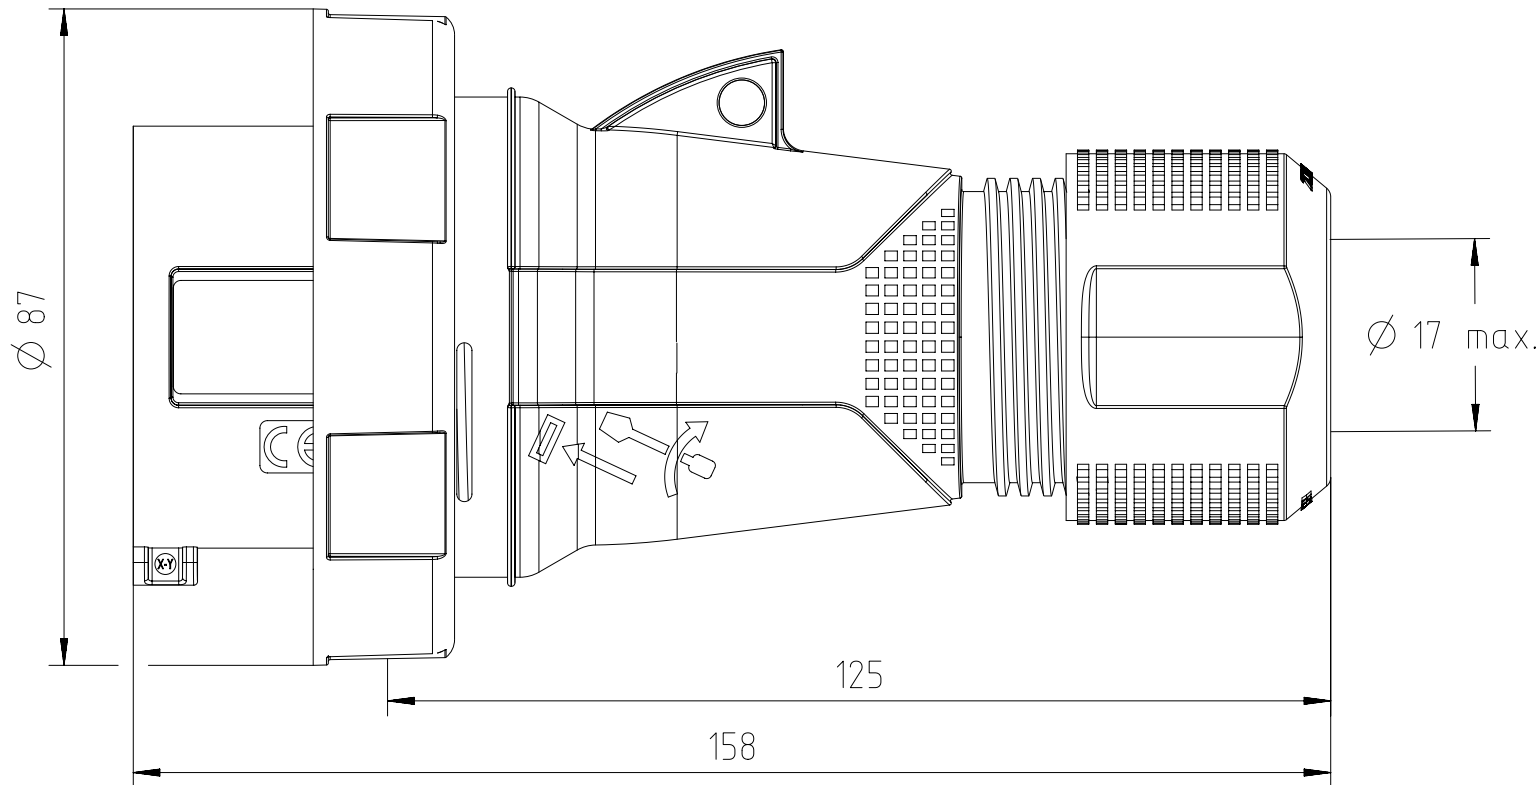

IEC 60309

All dimensions are in mm.

Gewicht (errechnet) / Calc WT: 210 g				Zul. Abw./Tolerances : ISO 2768-m		Maßstab / Scale : 1:1		A3			
Prüfmaß / Testdimension											
Teileindex / Partindexnumber:				 DIN / ISO 13715		CUSTOMER DRAWING					
minor change:											
				Gez.	30.12.2024	416EP6W Industrial Plug Industrial Plug					
				Drawn	WBENHASSINE						
				Status	Released						
				Gepr.	13.02.2025						
				Checked	HBENMANAA	M 2CMA101089R1000					
				Amphenol Tuchel Industrial GmbH							
01	2024-00052	30.12.2024	WBN			Blatt/Sheet 1					
Index	Änderung/Description	Datum/Date	Name			Ers. f. / Replacement for :					
						1 Bl.					