


DC Brushless FAN 80x80x20mm-A Type


轴承结构：双滚珠、含油、液压、其他
Bearing: two ball、sleeve、HY、other
框外材质: 塑胶(等级:UL94V-0)
Frame: Plastic(Flammability:UL94V-0)
扇叶材质: 塑胶:(等级:UL94V-0)
Impeller: Plastic:(Flammability:UL94V-0)
风扇单重: 60g(Weight: 60g)



P@Q CURVE(AT RATEDVOLTAGE)

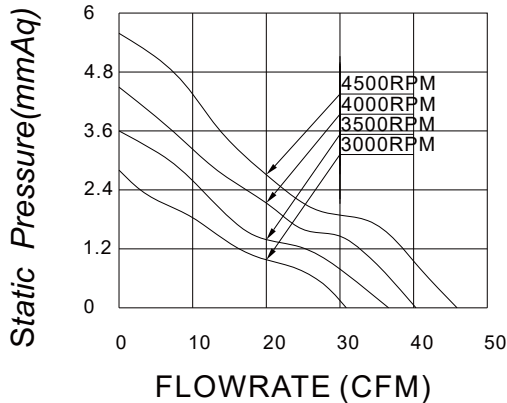

DIMENSIONS DRAWING(unit:mm)

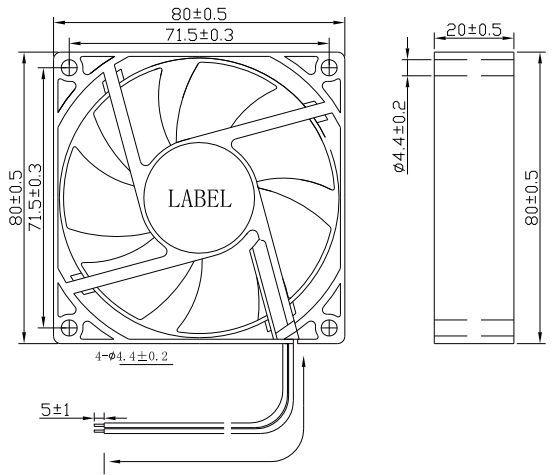

编码规则 Code Rule

例子 Example 12038H12B-1701
12038H12X-AY

Model No. is 12038H12X; Extro P/N code is AY

X means bearing type, can be S(sleeve bearing), can be B(ball bearing), can be Y(HY bearing), can be SU(sleeve with UL), can be BU(ball with UL), can be YU(HY with UL)

Y means special function code, it will be used for a certain parts no. or client.

产品型号 12038H12X; 附加代码 AY. X是一个不确定值, 它代表了不同的轴承类型,

S(含油轴承), B(滚珠轴承), Y(液压轴承), SU(含油轴承带UL), BU(滚珠轴承带UL), YU(液压轴承带UL)

Y是一个不确定的值, 它代表不同特殊风机功能, 由具体客户或者料号来确定

Model	P/N Code	Rated Voltage	Operationg Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Noise
型号	P/N 附加码	额定电压	工作电压范围	额定电流	额定输入功率	转速	最大风量		最大风压		噪音
PART.NO.	AY	VDC	VDC	Amp	Watt	R.P.M	M³/min	CFM	mmH2O	InH2O	dB-A
MG8020L12X		12	7~13.5	0.16	1.92	3000	0.874	30.9	2.82	0.111	35.7
MG8020M12X		12	7~13.5	0.22	2.64	3500	1.010	35.7	3.60	0.142	38.5
MG8020H12X		12	7~13.5	0.26	3.12	4000	1.135	40.1	4.41	0.174	41.6
MG8020HH12X		12	7~13.5	0.34	4.08	4500	1.276	45.1	5.51	0.217	45.3
MG8020L24X		24	18~26.5	0.08	1.92	3000	0.874	30.9	2.82	0.111	35.7
8MG020M24X		24	18~26.5	0.11	2.64	3500	1.010	35.7	3.60	0.142	38.5
MG8020H24X		24	18~26.5	0.13	3.12	4000	1.135	40.1	4.41	0.174	41.6
MG8020HH24X		24	18~26.5	0.17	4.08	4500	1.276	45.1	5.51	0.217	45.3
MG8020L48X		48	36~54	0.04	1.92	3000	0.874	30.9	2.82	0.111	35.7
MG8020M48X		48	36~54	0.055	2.64	3500	1.010	35.7	3.60	0.142	38.5
MG8020H48X		48	36~54	0.065	3.12	4000	1.135	40.1	4.41	0.174	41.6
MG8020HH48X		48	36~54	0.08	4.08	4500	1.276	45.1	5.51	0.217	45.3