




AD-CJU04N65 Plastic-Encapsulated MOSFET

AD-CJU04N65 N-Channel Power MOSFET

$V_{(BR)DSS}$	$R_{DS(on), MAX}$	I_D
650V	3.0Ω @ 10V	4A

DESCRIPTION

The AD-CJU04N65 is an N-channel mode power MOSFET using advanced technology to provide customers with planar stripe. This technology specializes in allowing a minimum on-state resistance and superior switching performance. It also can withstand high energy pulse in the avalanche and commutation mode. The AD-CJU04N65 is universally applied in high efficiency switch mode power supply.




FEATURES

- High switching speed
- 100% avalanche tested
- Excellent package for good heat dissipation
- AEC-Q101 qualified

APPLICATIONS


- Power switching application
- DC/DC converters

MARKING



U04N65 = Part No.
XXXX = Date code

EQUIVALENT CIRCUIT



MAXIMUM RATINGS ($T_j = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Value	Unit
Drain-source voltage	V_{DS}	650	V
Gate-source voltage	V_{GS}	± 30	V
Continuous drain current	$I_D^{1)}$	4	A
Pulsed drain current	$I_{DM}^{2)}$	16	A
Single pulsed avalanche energy	$E_{AS}^{3)}$	280	mJ
Maximum power dissipation	$P_D^{1)}$	48	W
Thermal resistance from junction to case	$R_{\theta JC}^{1)}$	2.6	$^\circ\text{C/W}$
Thermal resistance from junction to ambient	$R_{\theta JA}^{4)}$	100	$^\circ\text{C/W}$
Operating junction and storage temperature range	T_j, T_{stg}	-55 ~ 150	$^\circ\text{C}$







ELECTRICAL CHARACTERISTICS ($T_j = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test condition	Min	Typ	Max	Unit
Static characteristics						
Drain-source breakdown voltage	$V_{(BR)DSS}$	$V_{GS} = 0V, I_D = 250\mu A$	650	-	-	V
Drain-source diode forward voltage	V_{SD}	$V_{GS} = 0V, I_S = 4.0A$	-	-	1.5	
Zero gate voltage drain current	I_{DSS}	$V_{DS} = 600V, V_{GS} = 0V$	-	-	25	μA
Gate-body leakage current	I_{GSS}	$V_{GS} = \pm 30V, V_{DS} = 0V$	-	-	± 100	nA
Gate threshold voltage ⁵⁾	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 250\mu A$	2	-	4	V
Drain-source on-state resistance ⁵⁾	$R_{DS(on)}$	$V_{GS} = 10V, I_D = 2A$	-	2.3	3	Ω
Dynamic characteristics ^{5) 6)}						
Total gate charge	Q_g	$V_{DS} = 480V, V_{GS} = 10V, I_D = 4A$	-	5	10	nC
Gate-source charge	Q_{gs}		-	2.7	-	
Gate-drain charge	Q_{gd}		-	2	-	
Input capacitance	C_{iss}	$V_{DS} = 25V, V_{GS} = 0V, f = 1MHz$	-	-	760	pF
Output capacitance	C_{oss}		-	-	180	
Reverse transfer capacitance	C_{rss}		-	-	20	
Switching parameters ^{5) 6)}						
Turn-on delay time	$t_{d(on)}$	$V_{DD} = 300V, V_{GS} = 10V, R_L = 9.1\Omega, I_D = 4.0A$	-	-	20	ns
Turn-on rise time	t_r		-	-	10	
Turn-off delay time	$t_{d(off)}$		-	-	40	
Turn-off fall time	t_f		-	-	20	


1) Maximum allowed temperature $T_j = 25^\circ\text{C}$.2) Pulse width $\leq 10\mu s$, duty cycle $\leq 1\%$.3) Test condition: $V_{DD} = 50V, V_{GS} = 10V, L = 10mH, R_G = 25\Omega$, starting at $T_j = 25^\circ\text{C}$.4) Measured with the device mounted on 1 inch² FR-4 board with 2oz. copper, in a still air environment with $T_a = 25^\circ\text{C}$.5) Pulse test: Pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$.

6) Guaranteed by design, not subject to production.

Typical Characteristics

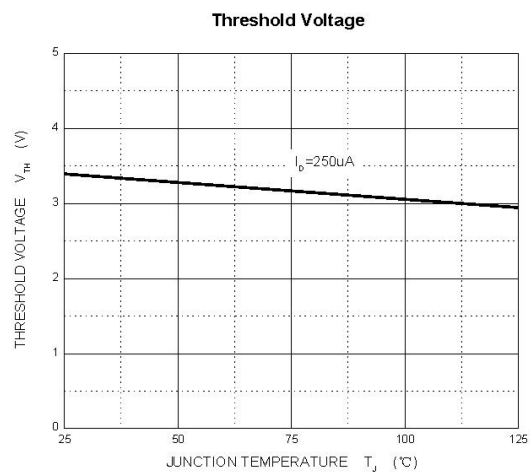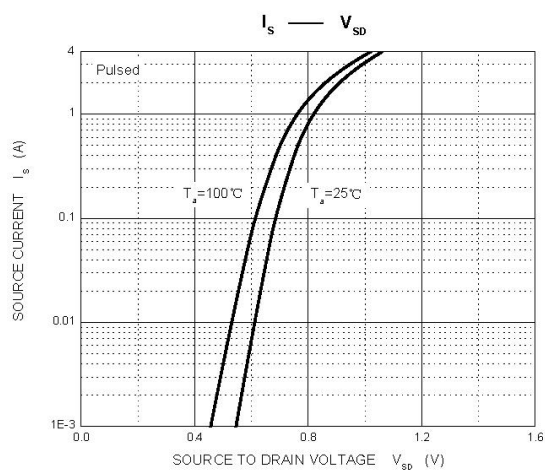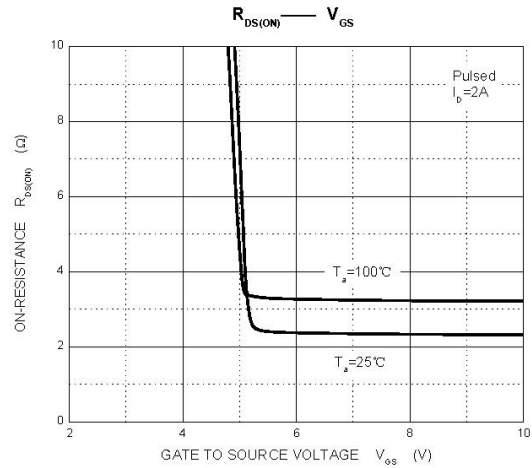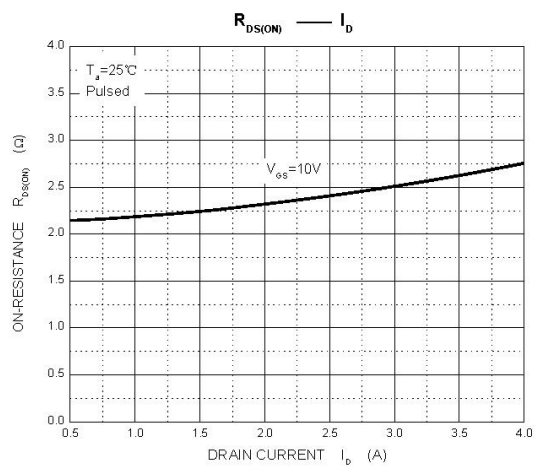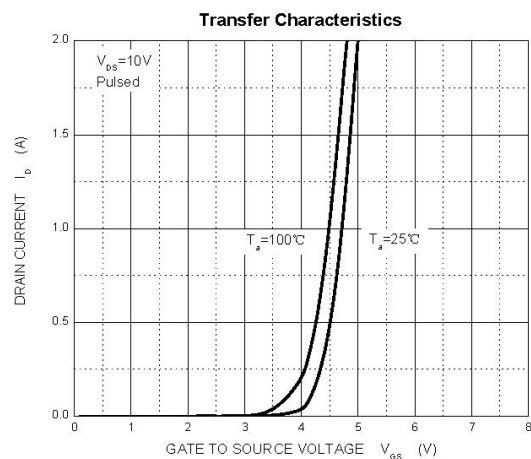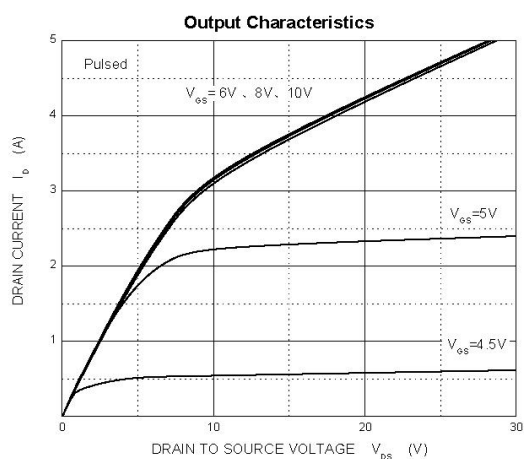


TO-252-2L PACKAGE OUTLINE DIMENSIONS

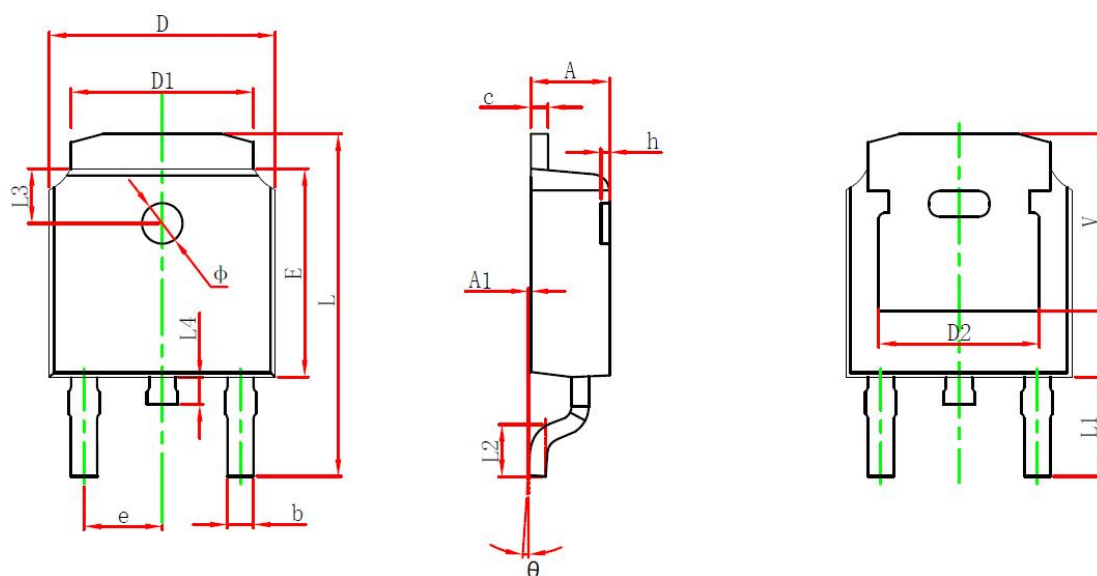

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	2.200	2.400	0.087	0.094
A1	0.000	0.127	0.000	0.005
b	0.635	0.770	0.025	0.030
c	0.460	0.580	0.018	0.023
D	6.500	6.700	0.256	0.264
D1	5.100	5.460	0.201	0.215
D2	4.830 REF.		0.190 REF.	
E	6.000	6.200	0.236	0.244
e	2.186	2.386	0.086	0.094
L	9.712	10.312	0.382	0.406
L1	2.900 REF.		0.114 REF.	
L2	1.400	1.700	0.055	0.067
L3	1.600 REF.		0.063 REF.	
L4	0.600	1.000	0.024	0.039
Φ	1.100	1.300	0.043	0.051
θ	0°	8°	0°	8°
h	0.000	0.300	0.000	0.012
V	5.250 REF.		0.207 REF.	

TO-252-2L SUGGESTED PAD LAYOUT

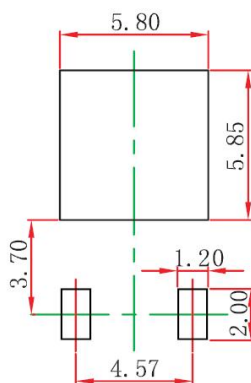


Note:

1. Controlling dimension in millimeters.
2. General tolerance: $\pm 0.05\text{mm}$.
3. The pad layout is for reference purpose only.

TO-252-2L TAPE AND REEL

TO-252 Embossed Carrier Tape

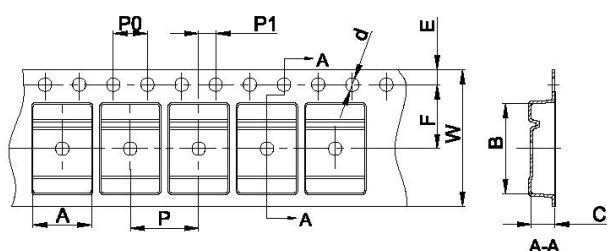


Packaging Description:


TO-252 parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 25,00 units per 13" or 33.0 cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
TO-252	6.90	10.50	2.70	Ø1.55	1.75	7.50	4.00	8.00	2.00	16.00

TO-252 Tape Leader and Trailer

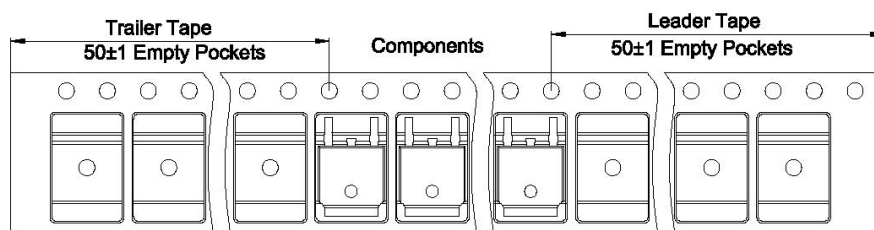

TO-252 Reel

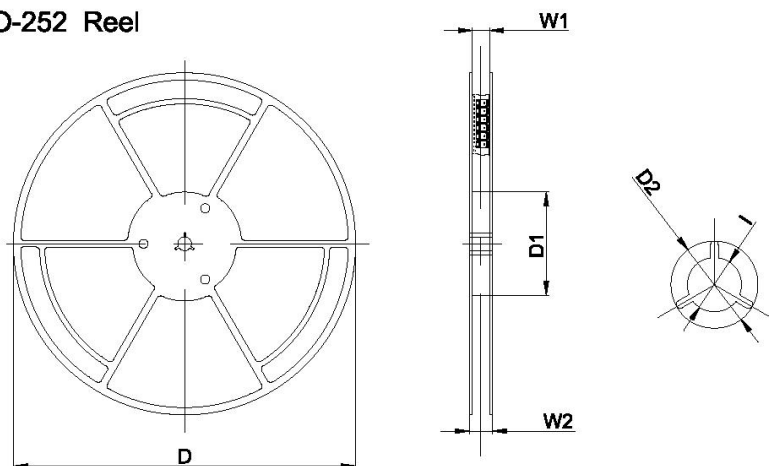

Dimensions are in millimeter						
Reel Option	D	D1	D2	W1	W2	I
13"Dia	330.00	100.00	Ø21.00	16.40	21.00	Ø13.00

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
2,500 pcs	13inch	2,500 pcs	340×336×29	25,000 pcs	353×346×365	

PUBLISHED BY**JIANGSU CHANGJING ELECTRONICS TECHNOLOGY CO., LTD.****13th Floor, C Block, Tengfei Building, Yan Chuang Yuan, Nanjing Jiangbei New Area, China****LEGAL DISCLAIMER**

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples, hints or typical values stated herein and/or any information regarding the application of the device, JSCJ hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of JSCJ in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

INFORMATION

For further information on technology, delivery terms and conditions as well as prices, please contact your nearest JSCJ office (www.jscj-elec.com).

WARNINGS

Due to technical requirements, products may contain dangerous substances. For information on the types in question, please contact your nearest JSCJ office.

Except as otherwise explicitly approved by JSCJ in a written document signed by authorized representatives of JSCJ, JSCJ's products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.