

F

E

D

C

B

A

F

E

D



C

B




A

REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
A	NEW	INTERIM INITIAL RELEASE.	2022.07.21	钟建虾



- NOTES:
- 1.HUOSING: PA9T HIGH-TEMP THERMOPLASTIC UL94V-0
 - 2.TERMINAL:PHOSPHOR BRONZE
 - 3. PLATING: SEE PART NUMBER

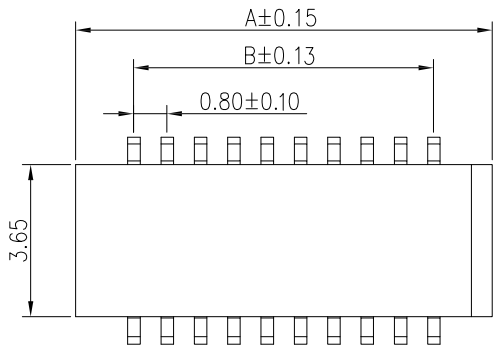

MATING HEIGHT
SCALE:1.25:1

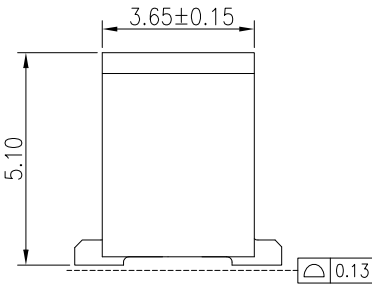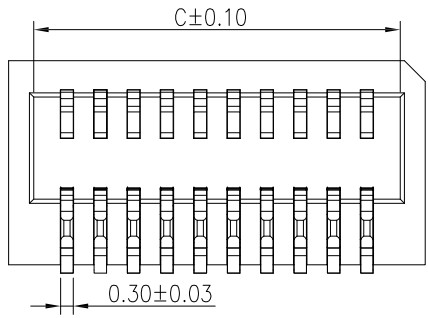

3D VIEW

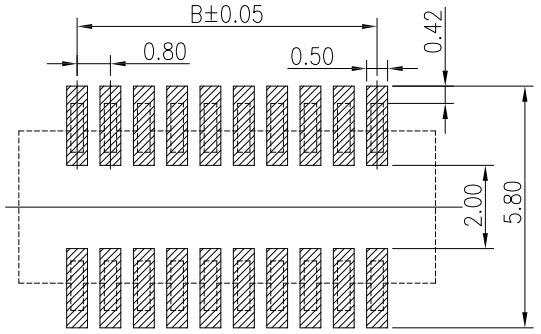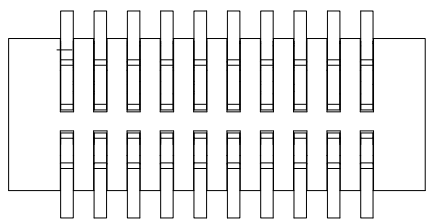

RECOMMENDED PCB
TOLERANCE : ±0.05

No of Pins/Row	Dimensions		
	A.	B.	C.
2	3.60	0.80	2.40
3	4.40	1.60	3.20
4	5.20	2.40	4.00
5	6.00	3.20	4.80
6	6.80	4.00	5.60
7	7.60	4.80	6.40
8	8.40	5.60	7.20
9	9.20	6.40	8.00
10	10.00	7.20	8.80
11	10.80	8.00	9.60
12	11.60	8.80	10.40
13	12.40	9.60	11.20
14	13.20	10.40	12.00
15	14.00	11.20	12.80
16	14.80	12.00	13.60
17	15.60	12.80	14.40
18	16.40	13.60	15.20
19	17.20	14.40	16.00
20	18.00	15.20	16.80
21	18.80	16.00	17.60
22	19.60	16.80	18.40
23	20.40	17.60	19.20
24	21.20	18.40	20.00
25	22.00	19.20	20.80
26	22.80	20.00	21.60

Ordering Information

C BBD202 - XX XX A 001 D X A X

No. of Pins per Row
02~26

Standard Plating
02=Gold Flash
Selective Plating
01=Tin
05=Gold Flash/Tin

Color
1=Black
2=White
5=Beige

Standard Packing
D=Tape&Reel

Website:www.greenconn.com
E-mail:sales@greenconn.com

3RD.ANG
PROJ.

PAGE. 1/1

GENERAL TOLERANCE	
X.*±5.0°	X.±0.35
.X°±3.0°	.X±0.30
.XX°±2.0°	.XX±0.25
.XXX°±1.0°	.XXX±0.10

DESIGNED: 钟建虾

CHECKED:

APPROVED:

DATE: 2022.07.21

DATE:

DATE:

DWG. NO.	TITLE.
CBBD202-CA001	0.8mm 侧插BTB SOCKET
PART NO.	
CBBD202-XXXXA001DXAX	