



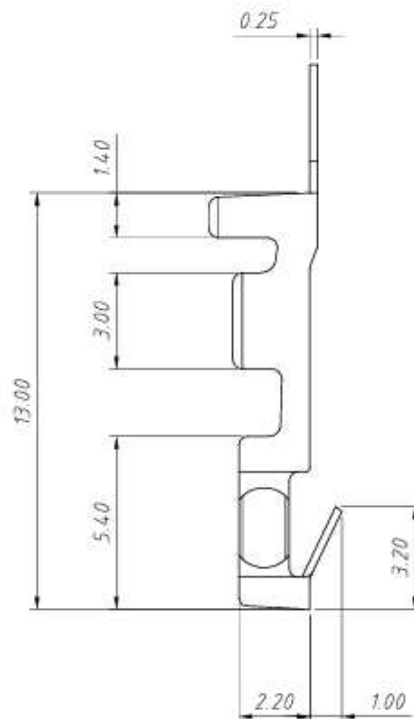


RoHS Compliance

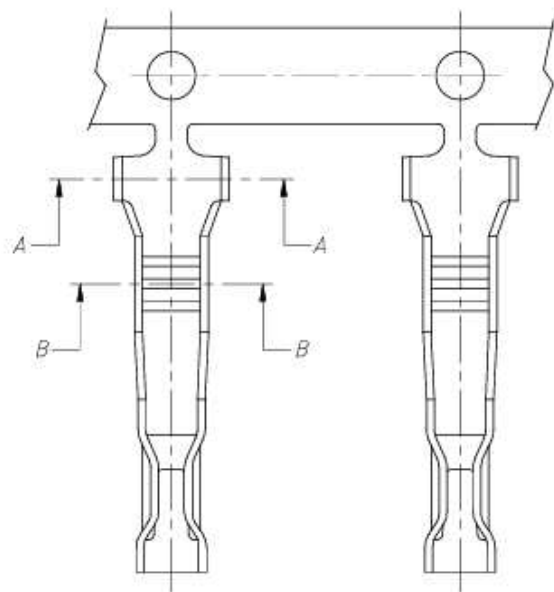

Material:
Terminal: Brass
Plating: Tin-plated
Applicable wires: AWG #18 ~ #24
Insulation O.D.: 2.70mm Max
Qty/reel: 6000 PCS

Electrical Characteristics:
Rated Current: 7.0AMP
Voltage rating: 250V AC/DC
Temperature range: -25°C ~ +85°C
Insulator Resistance: 1000MΩ Min
Withstand Voltage: 1500V AC/DC
Contact Resistance: 10mΩ Max

ANGLE TOLERANCE	PROJECTION	Description:
+3°		7.50mm Pitch Wire To Board Connector
GENERAL TOLERANCE	UNITS	mm
x.x	±0.30	SHEET SIZE A4
x.xx	±0.20	Draw: Daniel 2021-01-11
x.xxx	±0.10	Check: Daniel 2021-01-11

7.50mm Pitch Wire To Board Connector

P/N: ACHT-CT

CONN THERM