
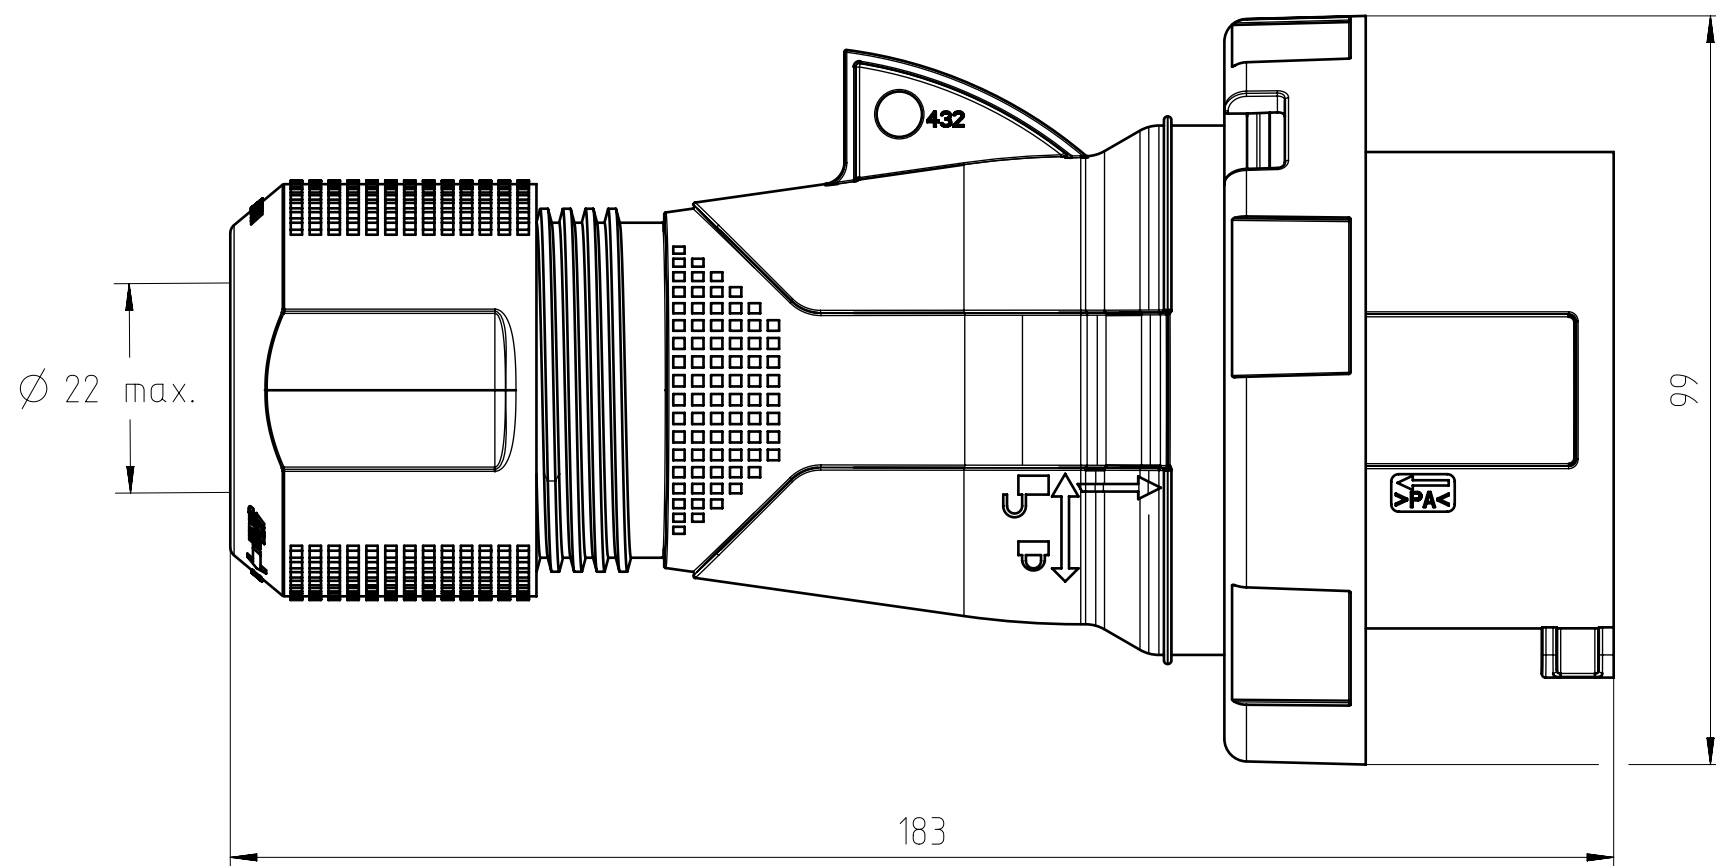


Amphenol Global ID	Product Group	Product Type	Function	Additional Information	Color
2CMA101112R1000	Easy&Safe	432EP6W	Plug	3P+N+E	Red


Rated Current	Rated Voltage	Clock position	Frequency	Degree of Protection	Housing Material
32 A	200/346 - 240/415 V	6 h	50 Hz 60 Hz	IP67	Plastic (PA)

Cable Cross Section	Wire Size	ConnectionType	Mounting Holes	Plug Angle	Product Weight
2.5 - 6 mm ²	12 - 10 AWG	Screw		Straight	0.25 Kg

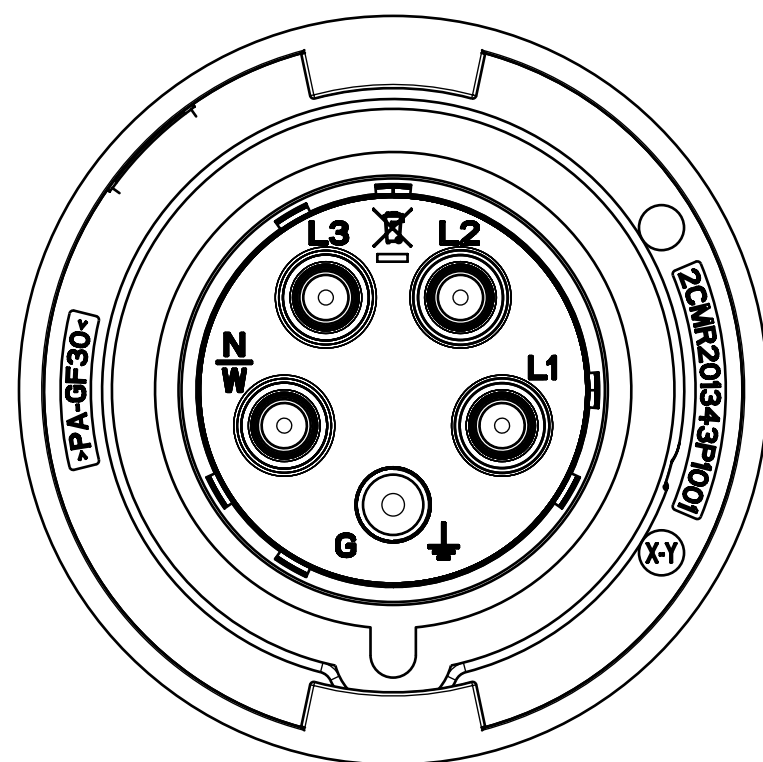

IEC 60309

All dimensions are in mm.

Gewicht (errechnet) / Calc WT: 250 g				Zul. Abw./Tolerances:		Maßstab / Scale: 1:1		A3			
Prüfmaß / Testdimension				ISO 2768-m				CUSTOMER DRAWING			
Teileindex / Partindexnumber:						DIN / ISO 13715					
minor change:											
				Gez.	23.05.2025	432EP6W Industrial Plug					
				Drawn	WBENHASSINE						
				Status	Released						
				Gepr.	17.09.2025						
				Checked	HBENMANAA						
				Amphenol Tuchel Industrial GmbH		M 2CMA101112R1000					
01	202500075	17.09.2025	WBEN								
Index	Änderung / Description	Datum / Date	Name			Ers. f. / Replacement for:					
						1 Bl.					