



SPECIFICATION		
1	Model No.	USS-EUS16T-40TR-WA
2	Construction	Open
3	Using method	Transmitter or receiver
4	Norminal Frequency	40kHz
5	SPL	≥68V/u Mbar
6	Sensitivity	≥115(10V/30cm/sine wave)
7	Directivity	80deg
8	Capacitance	2400±25%@1KHz
9	Detectable Range	18
10	Housing material	AL
11	Operating Temp.range	-20....+70
12	Weight(g)	3




REVISION HISTORY			
LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	9/23/2003	Y M
A			
B			
C			

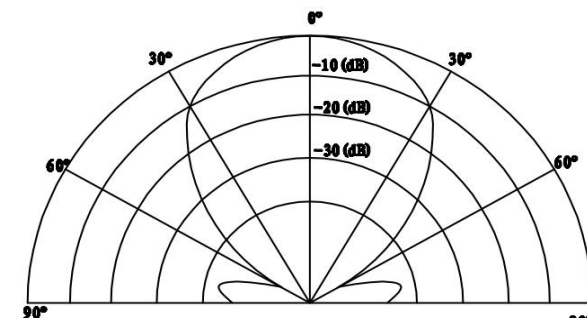

指向性/Directivity in Sensitivity

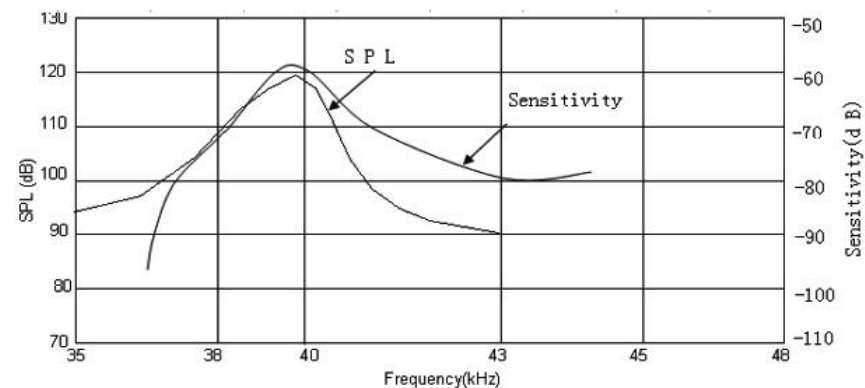

Frequency Characteristics

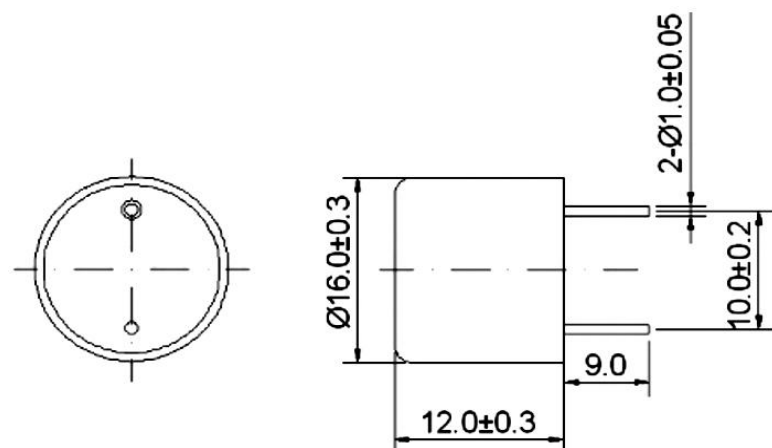

NOTES:

1.ALL DIMENSIONS ARE IN MILLIMETERS

2.SPECIFICATIONS SUBJECT TO CHANGE
WITHOUT NOTICE

SIZE	Designed by	Date	Checked by	Date	Approved by	Date	Drawed date
							
A4				USS-EUS16T-40TR-WA			
				Ultrasonic Sensor	Edition	Sheet	