
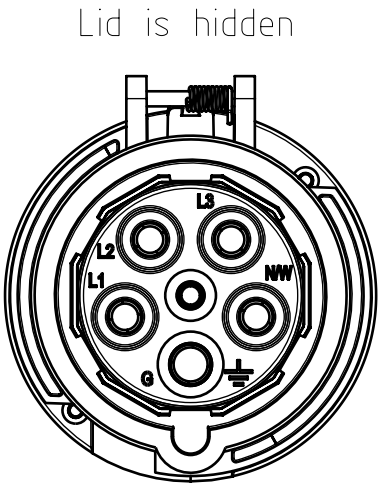



Amphenol Global ID	Product Group	Product Type	Function	Additional Information	Color
2CMA166906R1000	Tough&Safe	463C6W	Connector	3P+N+E	Red

Rated Current	Rated Voltage	Clock position	Frequency	Degree of Protection	Housing Material
63 A	200/346 - 240/415 V	6 h	50 Hz 60 Hz	IP67 IP69	Thermoplastic (PBT)

Cable Cross Section	Wire Size	ConnectionType	Mounting Holes	Plug Angle	Product Weight
4 - 16 mm ²	8 - 4 AWG	Screw		Straight	0.88 Kg

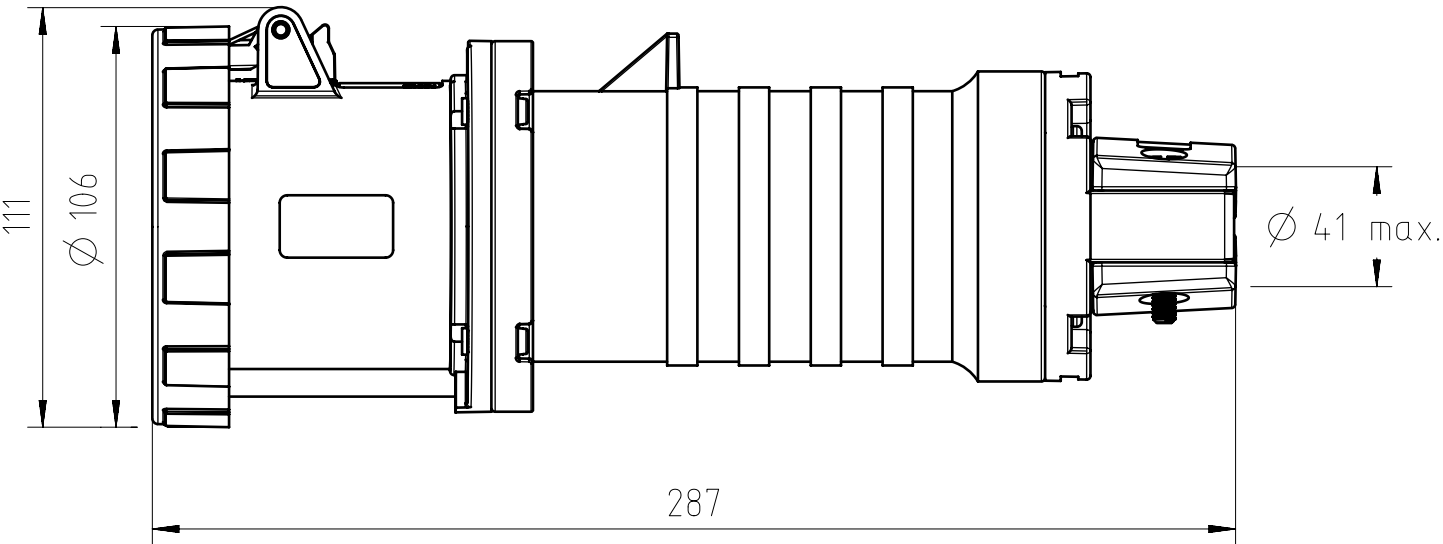

NOT TO SCALE

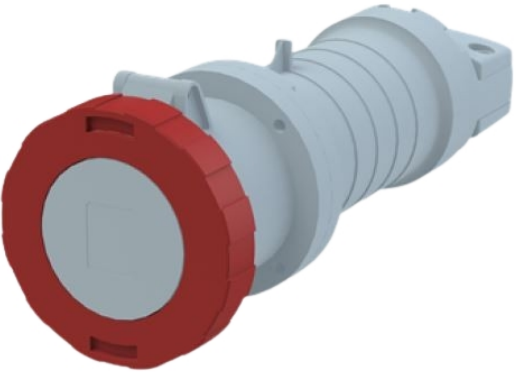

CE
IEC 60309

All dimensions are in mm.				Some dimensions are approximate.							
Gewicht (errechnet) / Calc WT: 880 g				Zul. Abw./Tolerances : ISO 2768-m		Maßstab / Scale : 2:3		A3			
 Prüfmaß / Testdimension						CUSTOMER DRAWING					
Teileindex / Partindexnumber:											
minor change:				 DIN / ISO 13715		463C6W Industrial Connector					
										Gez. 10.06.2025 Drawn WBENHASSINE Status Released Gepr. 01.06.2026 Checked HBENMANAA	
Amphenol Tuchel Industrial GmbH				M		2CMA166906R1000		Blatt/Sheet 1			
01	202500119	01.06.2026	WBEN					1 Bl.			
Index	Änderung/Description	Datum/Date	Name	Ers. f. / Replacement for :							