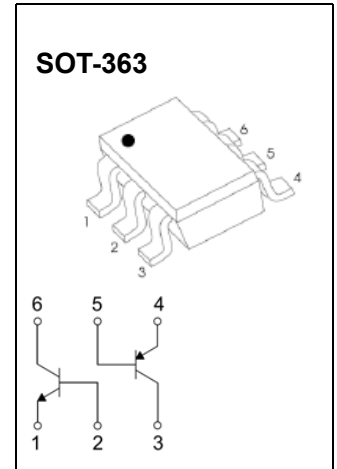


**SOT-363 Plastic-Encapsulate Transistors****MMDT4413 DUAL TRANSISTOR (NPN+PNP)****FEATURES**

- Complementary Pair
- One 4401-Type NPN
One 4403-Type PNP
- Epitaxial Planar Die Construction
- Ideal for Low Power Amplification and Switching

MAKING: K13**Maximum Ratings, NPN 4401 Section (Ta = 25°C unless otherwise specified)**

Symbol	Parameter	Value	Units
V_{CBO}	Collector-Base Voltage	60	V
V_{CEO}	Collector-Emitter Voltage	40	V
V_{EBO}	Emitter-Base Voltage	6	V
I_C	Collector Current -Continuous	0.6	A
P_C	Collector Power Dissipation	0.2	W
$R_{\theta JA}$	Thermal Resistance from Junction to Ambient	625	°C/W
T_J, T_{stg}	Operation Junction and Storage Temperature Range	-55 ~ +150	°C

**NPN 4401 ELECTRICAL CHARACTERISTICS (Ta=25°C unless otherwise specified)**

Parameter	Symbol	Test conditions	Min	Max	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C = 100 \mu A, I_E = 0$	60		V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C = 1 mA, I_B = 0$	40		V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = 100 \mu A, I_C = 0$	6		V
Collector cut-off current	I_{CBO}	$V_{CB} = 50 V, I_E = 0$		0.1	μA
Collector cut-off current	I_{CEO}	$V_{CE} = 35 V, I_B = 0$		0.5	μA
Emitter cut-off current	I_{EBO}	$V_{EB} = 5 V, I_C = 0$		0.1	μA
DC current gain	$h_{FE(1)}$	$V_{CE} = 1 V, I_C = 0.1 mA$	20		
	$h_{FE(2)}$	$V_{CE} = 1 V, I_C = 1 mA$	40		
	$h_{FE(3)}$	$V_{CE} = 1 V, I_C = 10 mA$	80		
	$h_{FE(4)}$	$V_{CE} = 1 V, I_C = 150 mA$	100	300	
	$h_{FE(5)}$	$V_{CE} = 2 V, I_C = 500 mA$	40		
Collector-emitter saturation voltage	$V_{CE(sat)1}$	$I_C = 150 mA, I_B = 15 mA$		0.4	V
	$V_{CE(sat)2}$	$I_C = 500 mA, I_B = 50 mA$		0.75	V
Base-emitter saturation voltage	$V_{BE(sat)1}$	$I_C = 150 mA, I_B = 15 mA$	0.75	0.95	V
	$V_{BE(sat)2}$	$I_C = 500 mA, I_B = 50 mA$		1.2	V
Transition frequency	f_T	$V_{CE} = 10 V, I_C = 20 mA, f = 100 MHz$	250		MHz
Output Capacitance	C_{ob}	$V_{CB} = 5 V, I_E = 0, f = 1 MHz$		6.5	pF
Delay time	t_d	$V_{CC} = 30 V, V_{BE} = 2.0 V, I_C = 150 mA, I_{B1} = 15 mA$		15	nS
Rise time	t_r			20	nS
Storage time	t_s	$V_{CC} = 30 V, I_C = 150 mA, I_{B1} = - I_{B2} = 15 mA$		225	nS
Fall time	t_f			30	nS

Maximum Ratings, PNP 4403 Section (Ta = 25°C unless otherwise specified)








Symbol	Parameter	Value	Units
V _{CBO}	Collector-Base Voltage	-40	V
V _{CEO}	Collector-Emitter Voltage	-40	V
V _{EBO}	Emitter-Base Voltage	-5	V
I _C	Collector Current -Continuous	-0.6	A
P _C	Collector Power Dissipation	0.2	W
R _{θJA}	Thermal Resistance from Junction to Ambient	625	°C/W
T _J , T _{stg}	Operation Junction and Storage Temperature Range	-55 ~ +150	°C

PNP 4403 ELECTRICAL CHARACTERISTICS (Ta=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	V _{(BR)CBO}	I _C = -100μA, I _E = 0	-40			V
Collector-emitter breakdown voltage	V _{(BR)CEO}	I _C = -1mA, I _B = 0	-40			V
Emitter-base breakdown voltage	V _{(BR)EBO}	I _E = -100μA, I _C = 0	-5			V
Collector cut-off current	I _{CBO}	V _{CB} = -35 V, I _E = 0			-0.1	μA
Collector cut-off current	I _{CEO}	V _{CE} = -35 V, I _B = 0			-0.5	μA
Emitter cut-off current	I _{EBO}	V _{EB} = -5V, I _C = 0			-0.1	μA
DC current gain	h _{FE(1)}	V _{CE} = -1 V, I _C = -0.1mA	30			
	h _{FE(2)}	V _{CE} = -1 V, I _C = -1mA	60			
	h _{FE(3)}	V _{CE} = -1 V, I _C = -10mA	100			
	h _{FE(4)}	V _{CE} = -2 V, I _C = -150mA	100		300	
	h _{FE(5)}	V _{CE} = -2 V, I _C = -500mA	20			
Collector-emitter saturation voltage	V _{CE(sat)1}	I _C = -150 mA, I _B = -15mA			-0.4	V
	V _{CE(sat)2}	I _C = -500 mA, I _B = -50mA			-0.75	V
Base-emitter saturation voltage	V _{BE(sat)1}	I _C = -150 mA, I _B = -15mA	-0.75		-0.95	V
	V _{BE(sat)2}	I _C = -500 mA, I _B = -50mA			-1.3	V
Transition frequency	f _T	V _{CE} = -10V, I _C = -20mA f = 100MHz	200			MHz
Output Capacitance	C _{ob}	V _{CB} = -10V, I _E = 0 f = 1MHz			8.5	pF
Delay time	t _d	V _{CC} = -30V, V _{BE} = -2V			15	nS
Rise time	t _r	I _C = -150mA, I _{B1} = -15mA			20	nS
Storage time	t _s	V _{CC} = -30V, I _C = -150mA			225	nS
Fall time	t _f	I _{B1} = -I _{B2} = -15mA			30	nS








Typical Characteristics

NPN Transistor

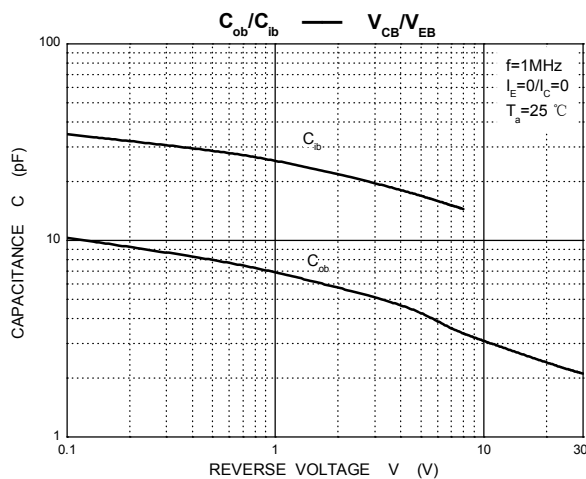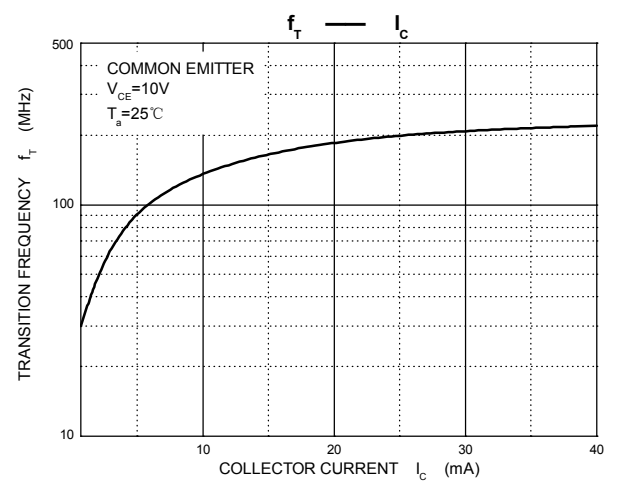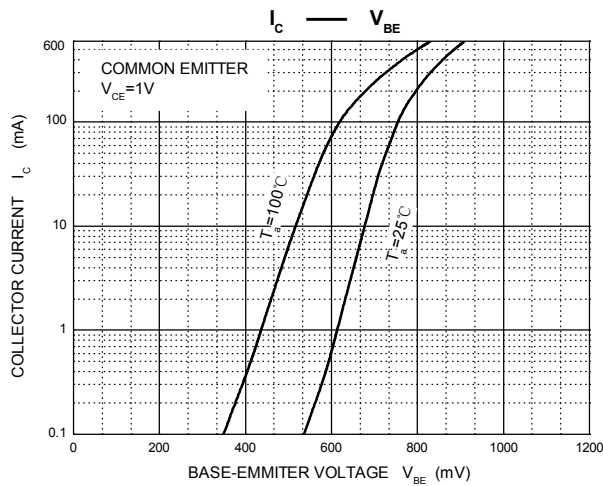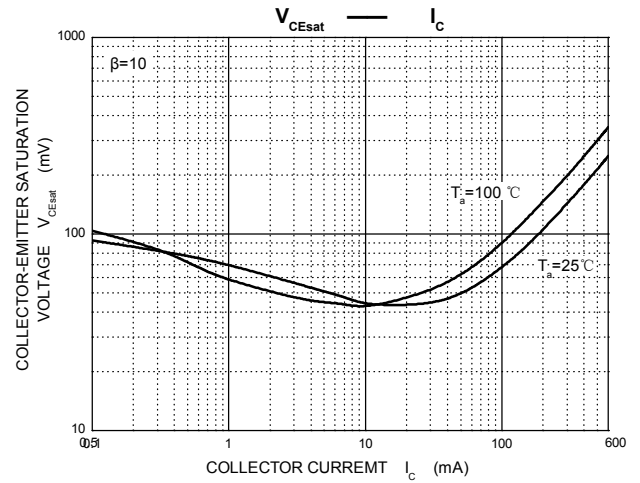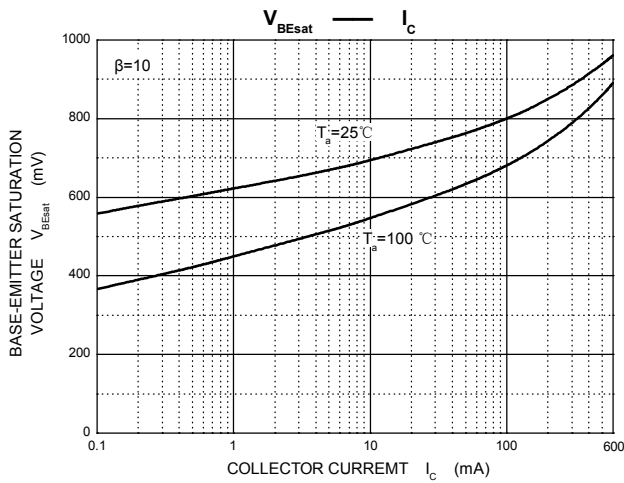
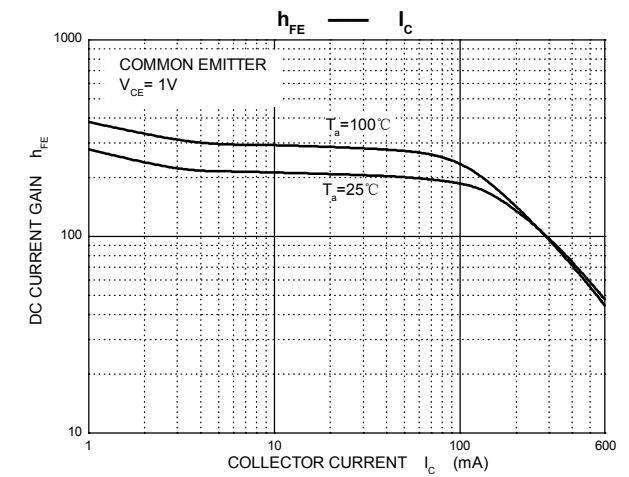
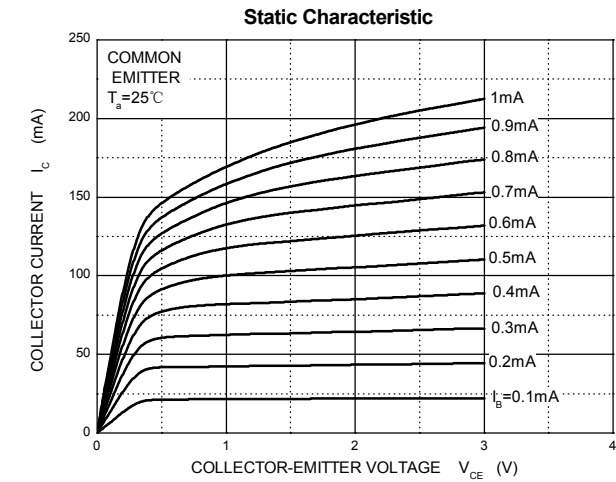


Typical Characteristics

PNP Transistor

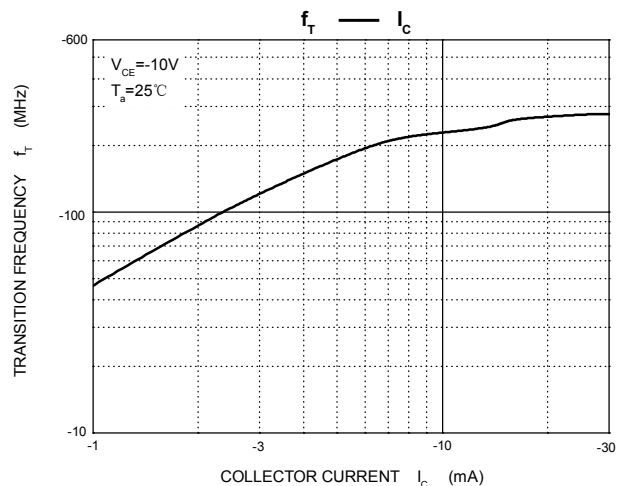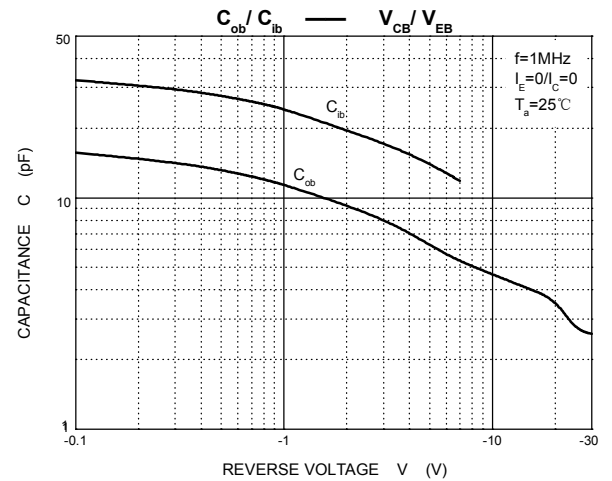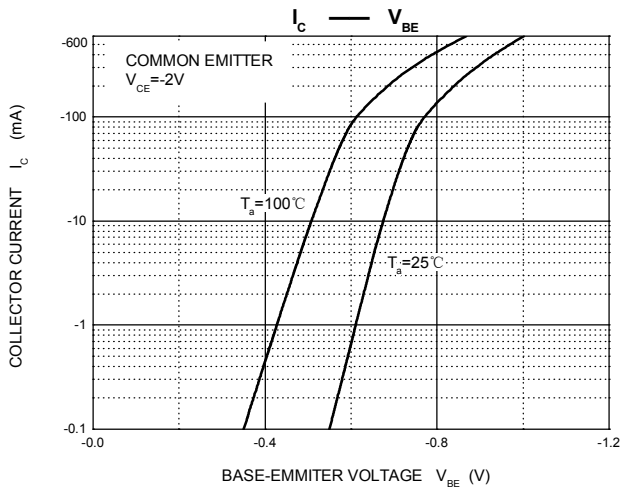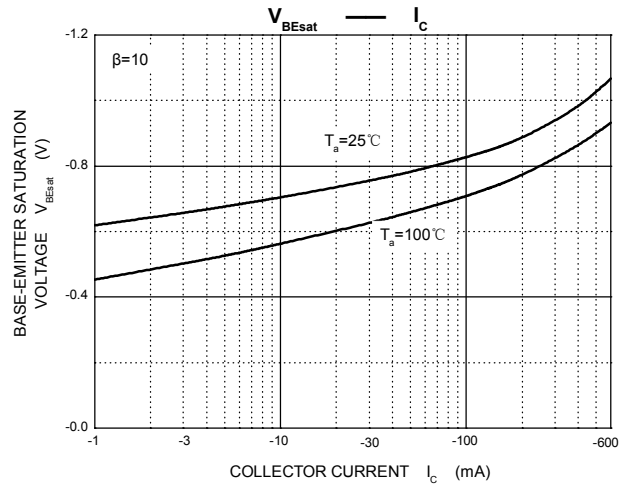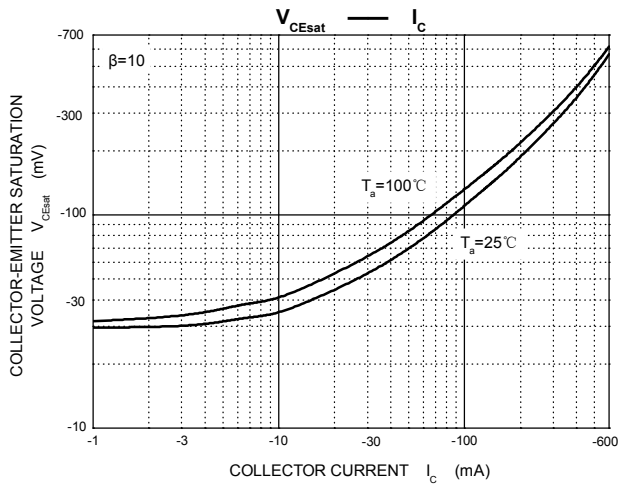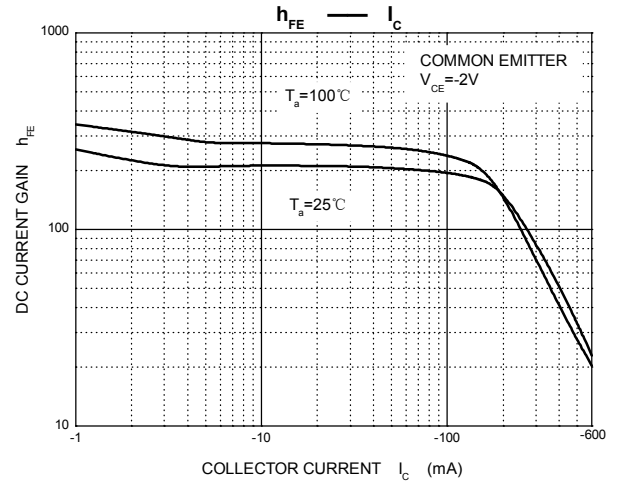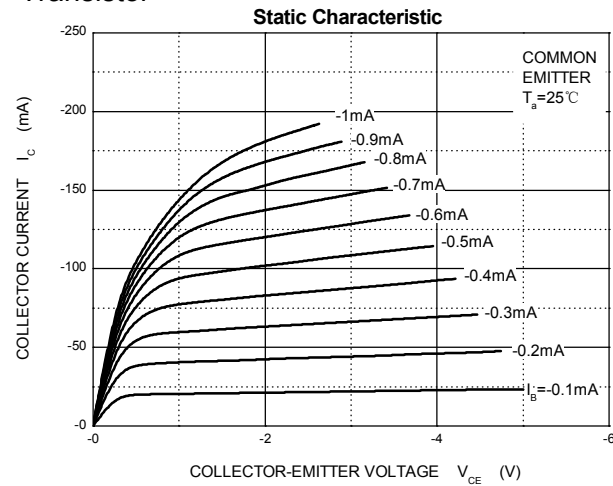


SOT-363 Package Outline Dimensions

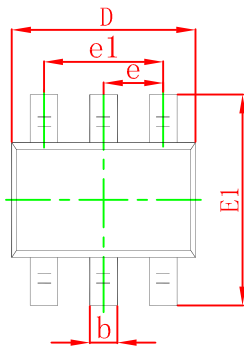

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.100	0.035	0.043
A1	0.000	0.100	0.000	0.004
A2	0.900	1.000	0.035	0.039
b	0.150	0.350	0.006	0.014
c	0.100	0.150	0.004	0.006
D	2.000	2.200	0.079	0.087
E	1.150	1.350	0.045	0.053
E1	2.150	2.400	0.085	0.094
e	0.650 TYP		0.026 TYP	
e1	1.200	1.400	0.047	0.055
L	0.525 REF		0.021 REF	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°

SOT-363 Suggested Pad Layout

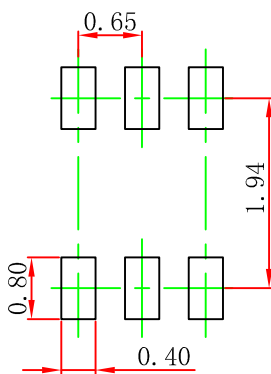


Note:

1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.05\text{mm}$.
3. The pad layout is for reference purposes only.

NOTICE

JSCJ reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. JSCJ does not assume any liability arising out of the application or use of any product described herein.


SOT-363 Embossed Carrier Tape

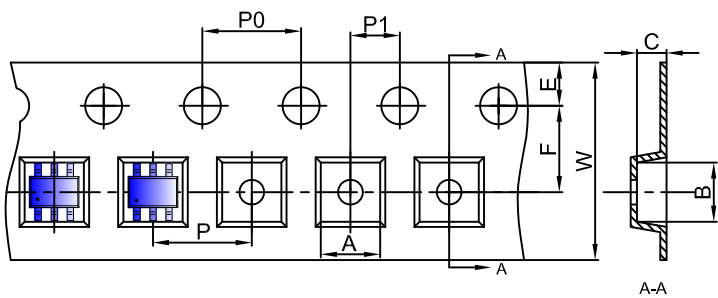


Packaging Description:
SOT-363 parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 3,000 units per 7" or 17.8cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
SOT-363	2.25	2.55	1.20	Ø1.50	1.75	3.50	4.00	4.00	2.00	8.00

SOT-363 Tape Leader and Trailer

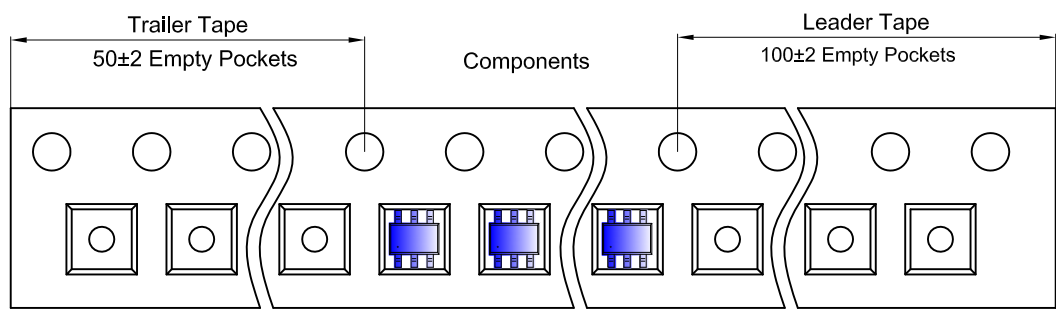

SOT-363 Reel

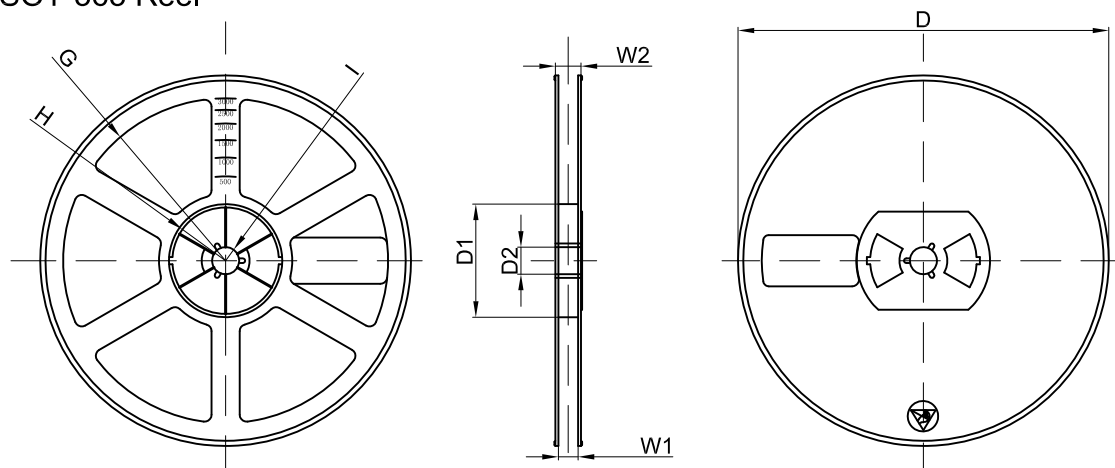

Dimensions are in millimeter								
Reel Option	D	D1	D2	G	H	I	W1	W2
7"Dia	Ø178.00	54.40	13.00	R78.00	R25.60	R6.50	9.50	12.30

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
3000 pcs	7 inch	45,000 pcs	203×203×195	180,000 pcs	438×438×220	