

F

E

D

C

B

A

F

E




D

C

B

A

REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	NEW	INITIAL RELEASE.	2009.09.29	車 激
02	△	依業務要求增加包裝配方	2009.12.28	謝金發
03	△	依上級要求變更圖號	2011.07.14	李芳忠
04	△	依上級要求變更CAP外觀	2013.09.03	李芳忠

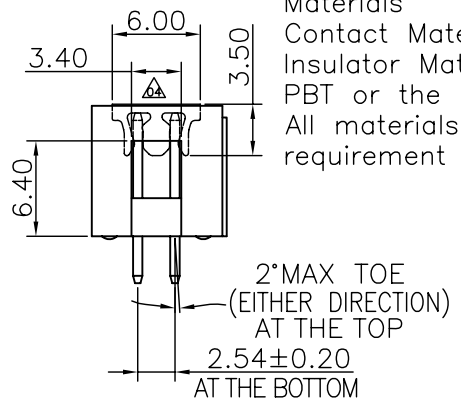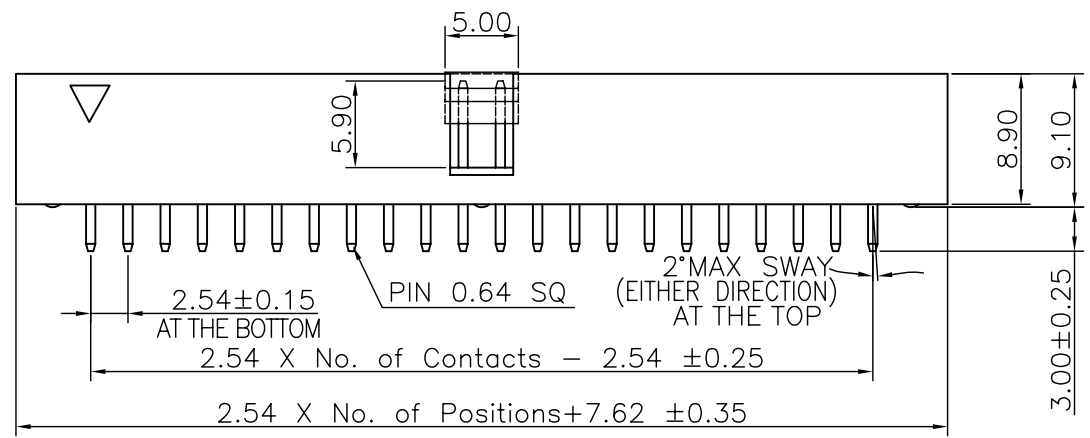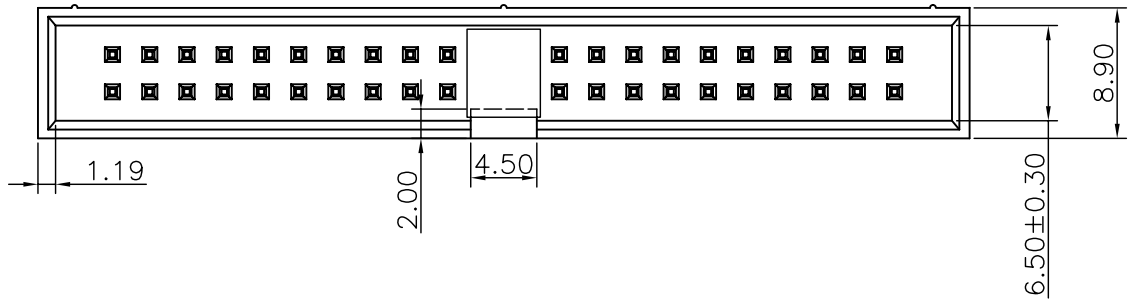

Specifications
Current Rating:3Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:600VAC
Contact Resistance:20mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material: Brass
Insulator Material:Thermoplastic, UL 94V-0
PBT or the equivalent material
All materials must meet Greenconn
requirement for environment protection.

Ordering Information

G PHA204 - XX XX A 001 A 1 B X


No. of Pins per Row
03~32

Standard Plating
02=Gold Flash
01=Tin
Selective Plating
05=Gold Flash/Tin
14=底鍍30-50u" 鍍全金30u"

Color
1=Black

Standard Packing
△ B=Tray
Selective Packing
A=Box
C=Tube
E=Cap+Tube
F=Cap+Tape&Reel

Recommended P.C.Board
Layout
(Tolerance:±0.05)



格菱股份有限公司
Greenconn Corporation

GENERAL TOLERANCE	
X.*±5.0°	X.±0.30
.X*±3.0°	.X±0.25
.XX*±2.0°	.XX±0.15
.XXX*±1.0°	.XXX±0.10

DESIGN: 李芳忠	DATE: 2013.09.03
CHECKED: 劉北平	DATE: 2013.09.03
AUDITED:	DATE:
APPROVED:	DATE:

DWG. NO. △	TITLE. 2.54 BOX HEADER DUAL ROW DIP TYPE BASE 9.10H
GPHA204-CA1AB	
PART NO.	GPHA204-XXXX A001A1BX

REV. 04	UNIT. mm	SCALE. 2:1	PAGE. 1/1	⊕
---------	----------	------------	-----------	---

1 2 3 4 5 6 7 8 9