



VERSION	CHANGE CONTENT	DATE
V00	FIRST ISSUE	2023-12-06

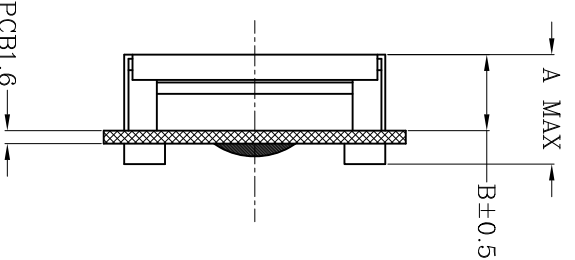

TYPE	A	B
LED B/L	13.9	9.3

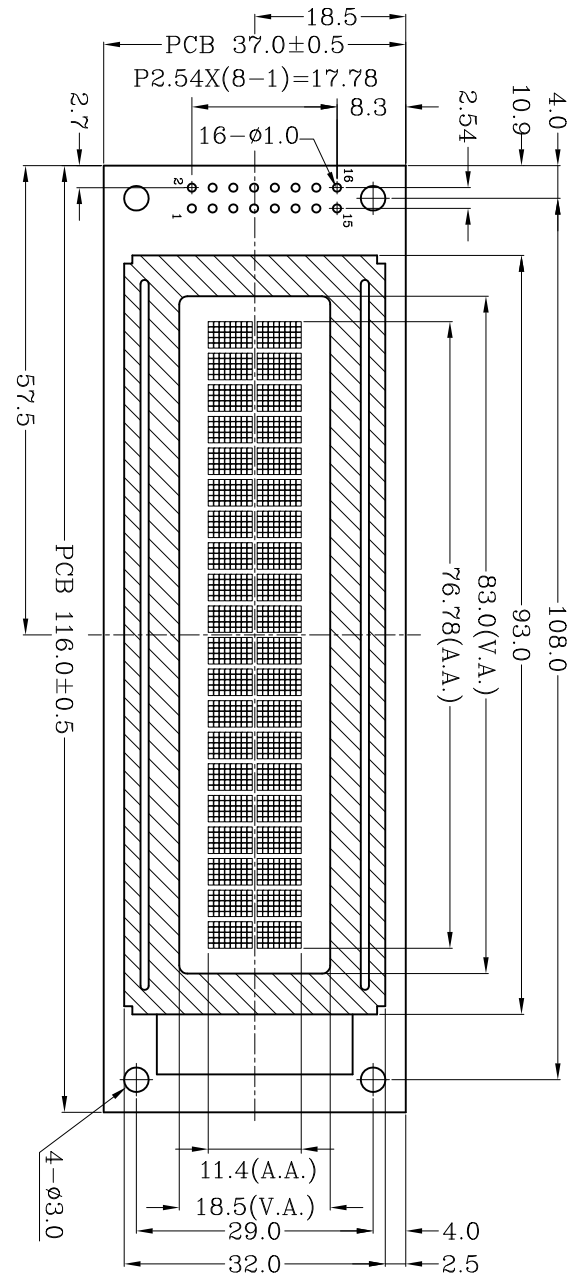

VIEWING

DETAIL DOTS
SCALE: 3:1

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
NAME	VSS	VDD	V0	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	LED+	LED-

SPECIFICATIONS

- DISPLAY TYPE: DEST/TRANSMISSIVE/NEGATIVE/B-W/Anti UV
- LCD DRIVING VOLTAGE:4.7V
- LOGIC VOLTAGE:5.0V
- VIEWING DIRECTION:6.0° CLCOK
- OPERATING TEMP: -20°C~70°C
- STORAGE TEMP: -30°C~80°C
- DRIVE MODE: 1/16 DUTY,1/5 BIAS
- BACKLIGHT:BLUE/SIDE BACKLIGHT/5.0V
- OTHER:

NOTE:

DESCRIPTION:

C/D

SCALE: FIT

SHEET: 1 OF 1

TINSHARP ELECTRONICS CO.,LTD.

PROJECTION

MODEL

SERIAL NUMBER

UNIT: mm

TC2002A-37

XLL1293

APP:

CHK:

DWN:

DATE:

DATE:

DATE:

MECHANICAL TOL.±0.3 UNLESS SPECIFIED