



C-LVRC16SC01S

REV	ECN	DESCRIPTION	DATE	MODIFIED
A	C3003	RELEASE		LUIK.PENG





Amphenol PCD SZ
ORIGINAL
PDF Format
R&D



安费诺精密连接器(深圳)有限公司
Amphenol PCD Shenzhen

受控文件

2018年10月11日

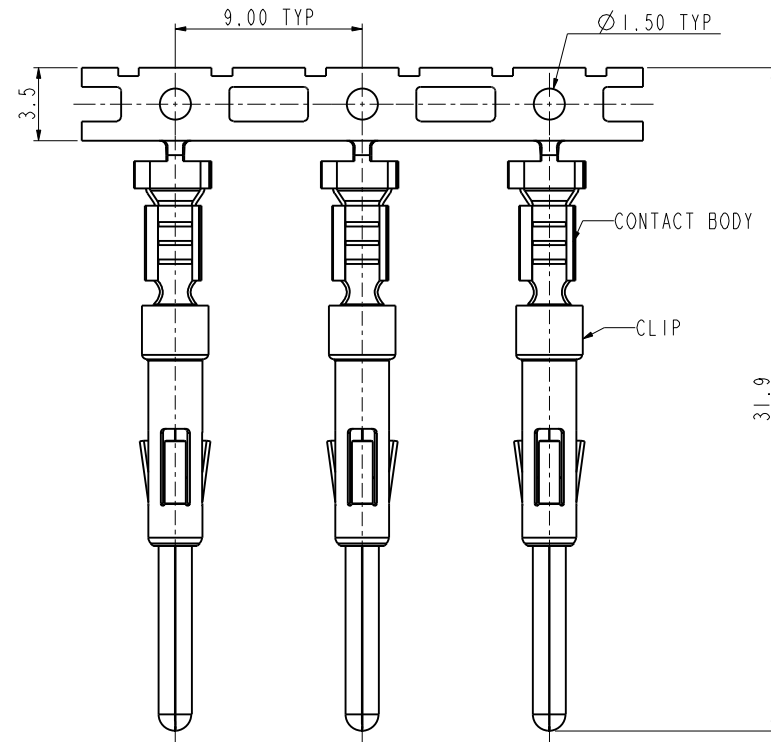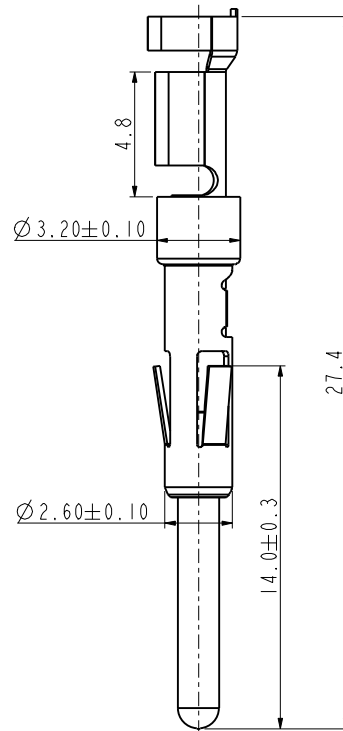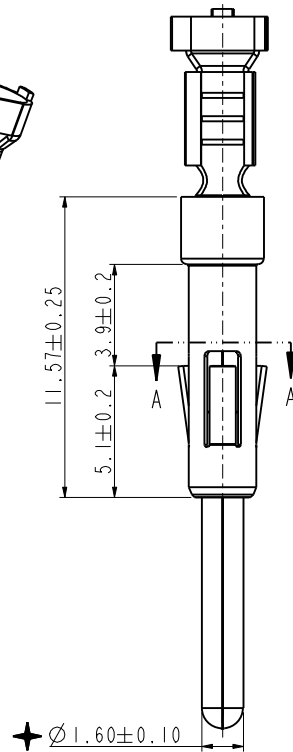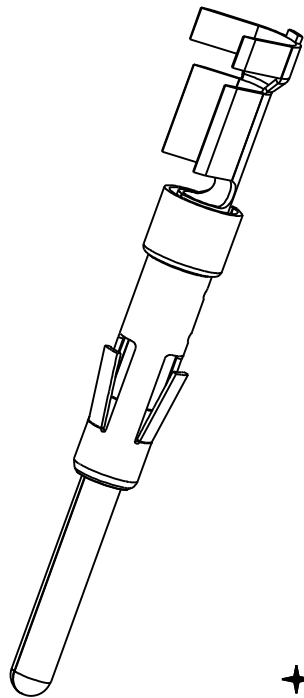

SCALE 4:1

★: IS CRITICAL CHARACTERISTIC SYMBOL, ◎: IS IMPORTANT CHARACTERISTIC SYMBOL.

NOTES:

- ★ 1. MATERIAL: CONTACT BODY: COPPER ALLOY; T=0.3mm, CLIP: STAINLESS STEEL, T=0.15mm.
2. CONTACT BODY PLATING: TIN PLATING.
- ◎ 3. WIRE RANGE: 18~14AWG(0.75~2.0 SQ MM), WIRE INSULATION OD RANGE: FROM 2.2MM TO 3.0MM.
- ★ 4. ROHS COMPLIANCE.
5. REEL PACKING 3000PCS PER REEL.

DIMENSIONS		TOLERANCES		PROJECTION	TITLE							
ANSI Y14.5M		.X ±0.5			Amphenol Pcd Shenzhen							
UNITS: MM		.XX ±0.05			ENGR							
Pro/E FILE		ANGLES ±3.0°			LUIK.PENG Mar-23-18							
ORIGINAL	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD SHENZHEN				CHKD	Jouk				SIZE	DWG NO.	REV
					APPD	Derek				A3	C-LVRC16SC01S	A
									CODE: 58982	SCALE: 5:1	SHEET 1 OF 1	