


DC Brushless FAN
120x120x25mm-D Type


轴承结构：双滚珠、含油、液压、其他
Bearing: two ball、sleeve、HY、other
框外材质: 塑胶(等级:UL94V-0)
Frame:Plastic(Flammability:UL94V-0)
扇叶材质:塑胶:(等级:UL94V-0)
Impeller:Plastic:(Flammability:UL94V-0)
风扇单重:185g(Weight:185g)



P@Q CURVE(AT RATEDVOLTAGE)

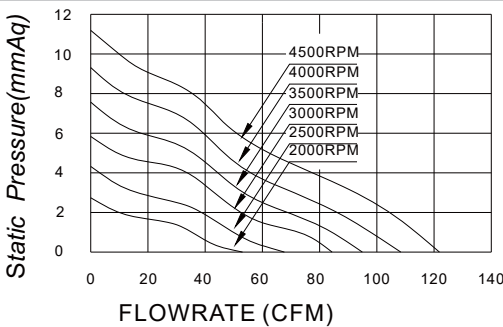

DIMENSIONS DRAWING(unit:mm)

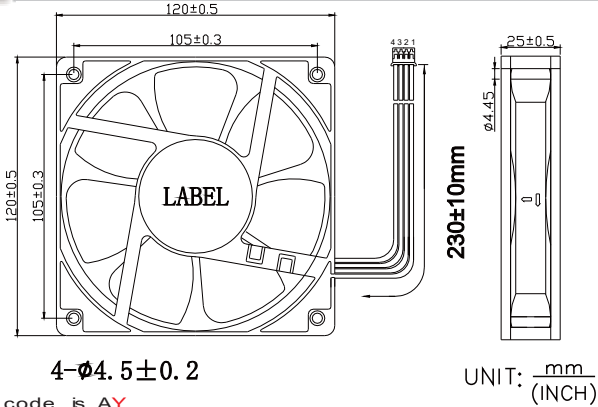

编码规则 Code Rule

例子 Example 12038H12B-1701
12038H12X-AY

Model No. is 12038H12X; Extro P/N code is AY
X means bearing type, can be S(sleeve bearing), can be B(ball bearing), can be Y(HY bearing), can be SU(sleeve with UL), can be BU(ball with UL), can be YU(HY with UL)
Y means special function code, it will be used for a certain parts no. or client.
产品型号 12038H12X; 附加代码 AY. X是一个不确定值, 它代表了不同的轴承类型, S(含油轴承), B(滚珠轴承), Y(液压轴承), SU(含油轴承带UL), BU(滚珠轴承带UL), YU(液压轴承带UL)
Y是一个不确定的值, 它代表不同特殊风机功能, 由具体客户或者料号来确定

Model	P/N Code	Rated Voltage	Operationg Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Noise
型号	P/N 附加码	额定电压	工作电压范围	额定电流	额定输入功率	转速	最大风量		最大风压		噪音
PART.NO.	DY	VDC	VDC	Amp	Watt	R.P.M	M³/min	CFM	mmH2O	InH2O	dB-A
MG12025L12X		12	7.5~13.5	0.3	3.6	2000	1.534	54.19	2.81	0.111	33.3
MG12025M12X		12	7.5~13.5	0.4	4.8	2500	1.910	67.49	4.25	0.167	41.3
MG12025H12X		12	7.5~13.5	0.5	6	3000	2.345	82.86	5.92	0.233	46.1
MG12025HH12X		12	7.5~13.5	0.6	7.2	3500	2.692	95.13	7.56	0.298	50.6
MG12025VH12X		12	7.5~13.5	0.7	8.4	4000	3.065	108.29	9.43	0.371	53
MG12025HV12X		12	7.5~13.5	0.8	9.6	4500	3.426	121.06	11.31	0.445	57.1
MG12025L24X		24	18~26.5	0.15	3.6	2000	1.534	54.19	2.81	0.111	33.3
MG12025M24X		24	18~26.5	0.2	4.8	2500	1.910	67.49	4.25	0.167	41.3
MG12025H24X		24	18~26.5	0.25	6	3000	2.345	82.86	5.92	0.233	46.1
MG12025HH24X		24	18~26.5	0.3	7.2	3500	2.692	95.13	7.56	0.298	50.6
MG12025VH24X		24	18~26.5	0.35	8.4	4000	3.065	108.29	9.43	0.371	53
MG12025HV24X		24	18~26.5	0.4	9.6	4500	3.426	121.06	11.31	0.445	57.1
MG12025L48X		48	36~54	0.075	3.6	2000	1.534	54.19	2.81	0.111	33.3
MG12025M48X		48	36~54	0.1	4.8	2500	1.910	67.49	4.25	0.167	41.3
MG12025H48X		48	36~54	0.125	6	3000	2.345	82.86	5.92	0.233	46.1
MG12025HH48X		48	36~54	0.15	7.2	3500	2.692	95.13	7.56	0.298	50.6
MG12025VH48X		48	36~54	0.175	8.4	4000	3.065	108.29	9.43	0.371	53
MG12025HV48X		48	36~54	0.2	9.6	4500	3.426	121.06	11.31	0.445	57.1