

NOTES:

UL Standard

1.

Use group	B	C	D
Rated Current	8A	8A	8A
Rated Voltage	300V	300V	300V

2. Wire range:28-16AWG

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	250V
Rate Current(A)	12A

2. Wire range:0.2-15mm²

NOTES2:

- 1.Housing: PA66(UL94V-0)
- 2.Cover: PA66(UL94V-0)
- 3.Clamp: Phosphor Brons(Ni Plated)
- 4.Spring: Stainless Steel
- 5.Button: PA66(UL94V-0)
- 6.Screw: Steel(Zn Plated)

NOTES3:

- 1.Pitch: 3.81mm Poles: XXP
- 2.Operating temperature: -40℃~+105℃
- 3.Stripping length:9.0mm
- 4.RoHS Compliance


How to order

UL0-TB13 - 15KD/3.81 - XXP - Y 0.0 0A

Certificate Factory poles Customer requirements
Series NO. Code

color:

- 1:Grey 2:Blue 3:Black
- 4:Green 5:Orange 6:Red
- 7:transparent 8:Yellow 9:White

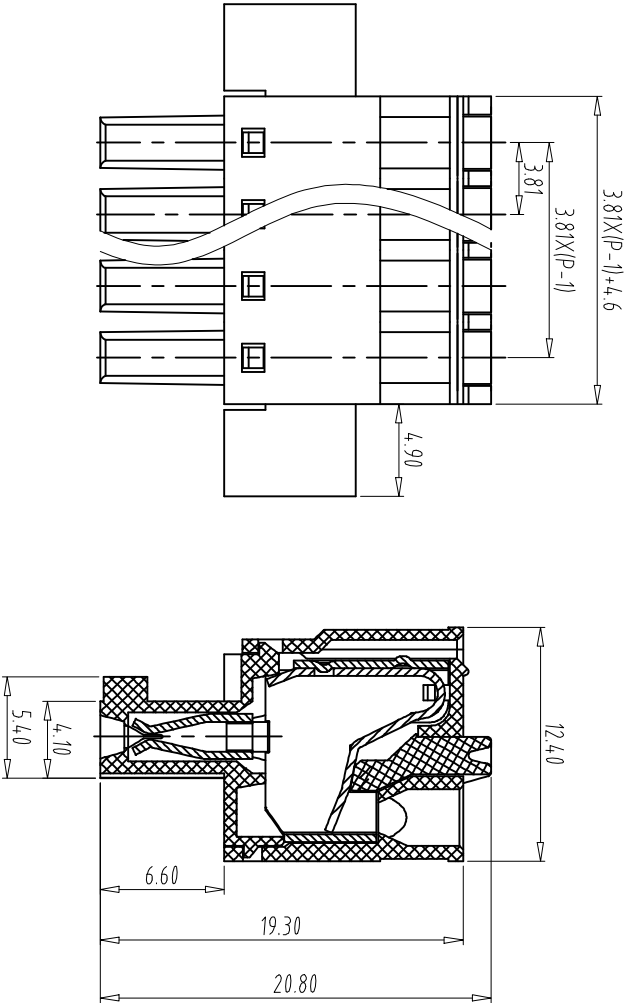

Total Pitch Tolerances		Nominal dimension range												—	//
in mm		in mm													

over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70
6									5						4

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.05.12	UNITS	MM
CHK.	DATE	SCALE	1:1	SHEET/OF	1/1
APP.	DATE	NAME	UL0-TB13-15KD/3.81-XXP-Y000A		
NINGBO UL0 ELECTRONICS CO.,LTD.			DWGNO.	UL0TB13Y000A	