
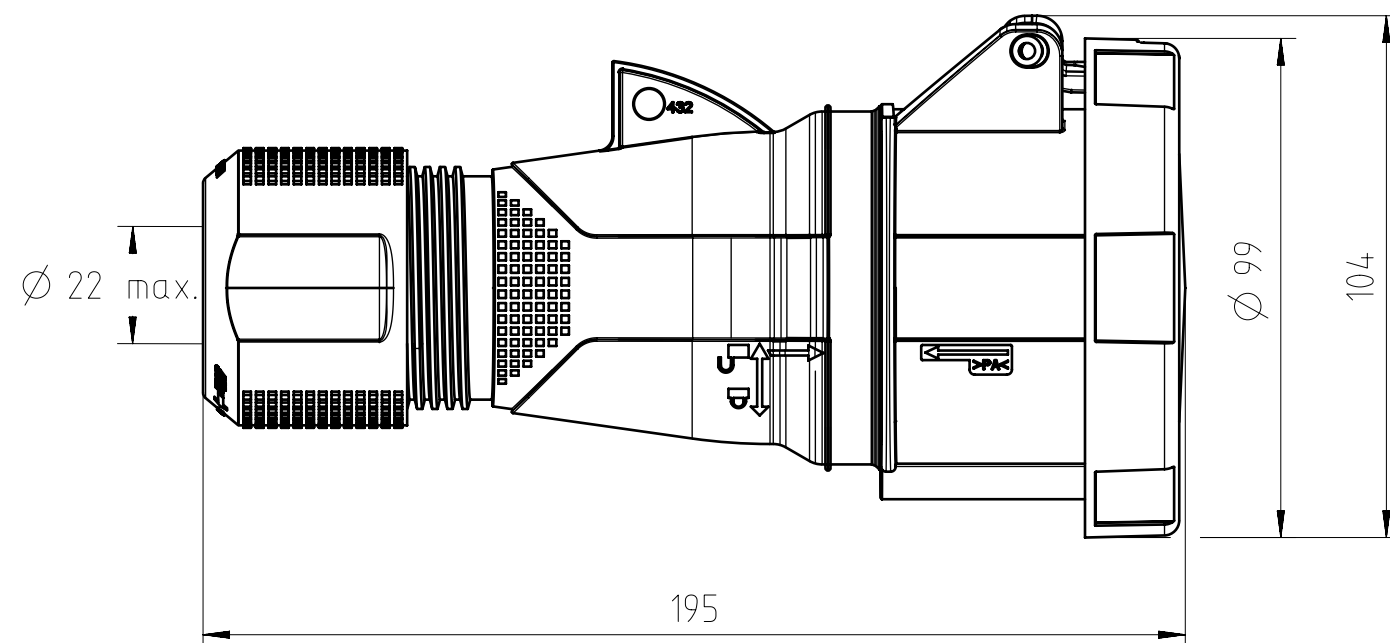


Amphenol Global ID	Product Group	Product Type	Function	Additional Information	Color
2CMA101159R1000	Easy&Safe	432EC6W	Connector	3P+N+E	Red

Rated Current	Rated Voltage	Clock position	Frequency	Degree of Protection	Housing Material
32 A	200/346 - 240/415 V	6 h	50 Hz/60 Hz	IP67	Plastic (PA)

Cable Cross Section	Wire Size	ConnectionType	Mounting Holes	Plug Angle	Product Weight
2.5 - 6 mm ²	12 - 10 AWG	Screw		Straight	0.30 Kg

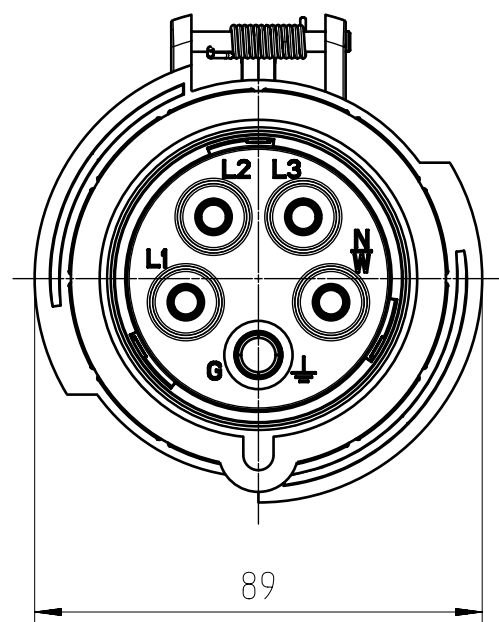

NOT TO SCALE



CE
IEC 60309

All dimensions are in mm.

Gewicht (errechnet) / Calc WT : 350 g				Zul. Abw./Tolerances :		Maßstab / Scale : 1:1		A3		
 Prüfmaß / Testdimension				ISO 2768-m		 DIN / ISO 13715		CUSTOMER DRAWING		
Teileindex / Partindexnumber:										
minor change:										
				Gez.	29.05.2026	432EC6W Industrial Connector				
				Drawn	WBENHASSINE					
				Status	Released					
				Gepr.	01.06.2026					
				Checked	HBENMANAA					
				Amphenol Tuchel Industrial GmbH		M		2CMA101159R1000		Blatt/ Sheet 1
01	202600053	01.06.2026	WBEN							1 Bl.
Index	Änderung/Description	Datum/Date	Name			Ers. f. / Replacement for :				