



# Specification For Approval

## 承認書

客 戶 (Customer)			
品 名 (Product Name)	ECM ASS'Y		
機 種 (Model No.)			
客戶料號 (Customer Parts No.)			
供應商料號 (Supplier Model No.)	PVMW9750B-CC473A-7RBE		
客戶承認簽章 Customer Approval Signature	In Charge	Checked	Approval

Revision History			
Version	Date	Description	Author
V 00	2026.03.30	Creation	VIVIAN

紘立企業有限公司 E-mail: [vecot@veco.com.tw](mailto:vecot@veco.com.tw)

Vansononic Enterprise Co., Ltd. Tel: +886-2-2267 2389 Fax: +886-2-2267 2588

佛山鋳利電子有限公司 E-mail: [vecof@vansononic.net](mailto:vecof@vansononic.net) Office: [fs\\_sales@veco.com.cn](mailto:fs_sales@veco.com.cn)

Vanson Electronics(Nanhai)Co., Ltd. Tel: +86-757-8853 6828 Fax: +86-757-8853 6826

合肥宏立電子有限公司 E-mail: [reception@veco-hf.com](mailto:reception@veco-hf.com)

HeFei Vanson Electronics Inc. Tel: +86-551-568 9589 Fax: +86-551-568 9593

重慶弘立電子有限公司 E-mail: [cq\\_sales@veco.com.cn](mailto:cq_sales@veco.com.cn)

Vanson Electronics (ChongQing)Co.,Ltd. Tel: +86-023-49521999 Fax: +86-023-49655990

創達電子有限公司 E-mail: [vecot@veco.com.tw](mailto:vecot@veco.com.tw)

VENTRONICS ELECTRONICS (WEIFANG) CO.,LT Tel: +86-0536 8669723 Fax: +86-0536 8662357

Design :     VIVIAN     Checked :     VIVIAN     Approval :     VIVIAN

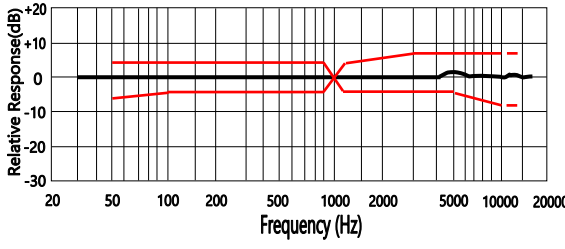
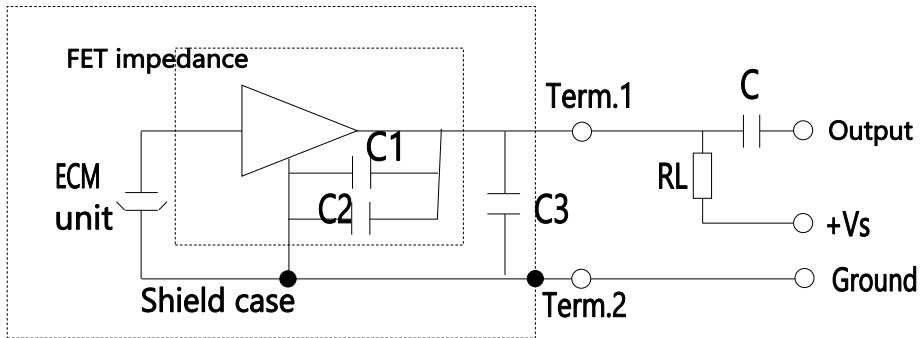
# VECO VANSONIC ENTERPRISE CO.,LTD.

3F., No. 123, Zhongcheng Rd., Tucheng Dist., New Taipei City, Taiwan.


E-mail: [vecot@veco.com.tw](mailto:vecot@veco.com.tw) <http://www.veco.com.tw>

TEL: +886-2-2267 2389

FAX: +886-2-2267 2588

<b>1.</b>	<b>Name :</b>	Omni directional Back Electret Condenser Microphone																																	
<b>2.</b>	<b>Model No.</b>	<b>PVMW9750B-CC473A-7RBE</b>	C1 = 10PF	C2 = 33PF	C3 = 10PF	<b>IP65</b>																													
<b>3.</b>	<b>Scope :</b>	This specification applies back electret condenser microphone (Temp=20±2°C Room Humidity=65±5%)																																	
	No	Parameter	Symbol	Condition	Limits			Unit																											
					Min.	Center	Max.																												
	3.1	Sensitivity	S	0dB=1V/Pa , at 1kHz	-50	-47	-44	dB																											
	3.2	Output impedance	Z out	f=1kHz			2.2	KΩ																											
	3.3	Current Consumption	I <sub>DSS</sub>	V <sub>CC</sub> =1.5V,R <sub>L</sub> =0.68KΩ			500	μA																											
	3.4	Signal to Noise Ratio	S/N	at 1kHz S.P.L=1Pa (A-Weighted Curve)	58			dB																											
	3.5	Decreasing Voltage	ΔS	V <sub>CC</sub> =3.0V to2.0V			-3	dB																											
	3.6	Operating Voltage			1.0		5.0	V																											
	3.7	Maximum input S.P.L					110	dB																											
3.8	Typical Frequency Response Curve																																		
	Frequency Response				Microphone Response Tolerance Window																														
					<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: center;">Frequency(Hz)</th> <th style="text-align: center;">Lower Limit(dB)</th> <th style="text-align: center;">Upper Limit(dB)</th> </tr> </thead> <tbody> <tr><td style="text-align: center;">50</td><td style="text-align: center;">-6</td><td style="text-align: center;">+3</td></tr> <tr><td style="text-align: center;">100</td><td style="text-align: center;">-3</td><td style="text-align: center;">+3</td></tr> <tr><td style="text-align: center;">800</td><td style="text-align: center;">-3</td><td style="text-align: center;">+3</td></tr> <tr><td style="text-align: center;">1000</td><td style="text-align: center;">0</td><td style="text-align: center;">0</td></tr> <tr><td style="text-align: center;">1200</td><td style="text-align: center;">-3</td><td style="text-align: center;">+3</td></tr> <tr><td style="text-align: center;">3000</td><td style="text-align: center;">-3</td><td style="text-align: center;">+8</td></tr> <tr><td style="text-align: center;">5000</td><td style="text-align: center;">-3</td><td style="text-align: center;">+8</td></tr> <tr><td style="text-align: center;">10000</td><td style="text-align: center;">-8</td><td style="text-align: center;">+8</td></tr> </tbody> </table>				Frequency(Hz)	Lower Limit(dB)	Upper Limit(dB)	50	-6	+3	100	-3	+3	800	-3	+3	1000	0	0	1200	-3	+3	3000	-3	+8	5000	-3	+8	10000	-8	+8
Frequency(Hz)	Lower Limit(dB)	Upper Limit(dB)																																	
50	-6	+3																																	
100	-3	+3																																	
800	-3	+3																																	
1000	0	0																																	
1200	-3	+3																																	
3000	-3	+8																																	
5000	-3	+8																																	
10000	-8	+8																																	
3.9	Measurement Circuit																																		
							R <sub>L</sub> =0.68KΩ																												
							V <sub>S</sub> =1.5V																												
							C1 = 10PF																												
							C2 = 33PF																												
							C3=6.8PF																												
							C=1μF																												

**4. Test Setup Drawing**



**5. Appearance And Dimension**

Unit : mm

Waterproof cloth:IP65

$5.0 \pm 0.2$

$\Phi 9.7 \pm 0.2$

Term.1 Output

Term.2 Ground

**6. Drawing**

10	CAP		1	6.8PF
9	FET	Contains 10PF&33PF capacitors	1	
8	P.C.B		1	FR-4
7	Copper ring	Copper tube	1	
6	HOUSING CHAMBER	Gather formaldehyde	1	
5	ELECTRET BACK	Copper blank	1	
4	SPACER	Mylar	1	
3	POLARIZED DIAPHRAGM	DUPONT	1	
2	CASE	Al-Mg alloy	1	
1	FELT	Waterproof cloth	1	IP65
<b>No.</b>	<b>Name</b>	<b>material</b>	<b>QTY</b>	<b>Remark</b>

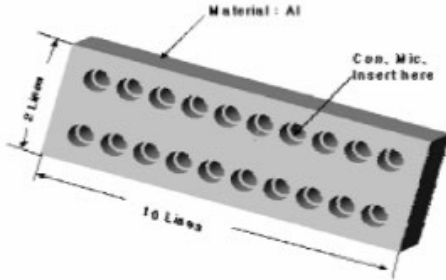
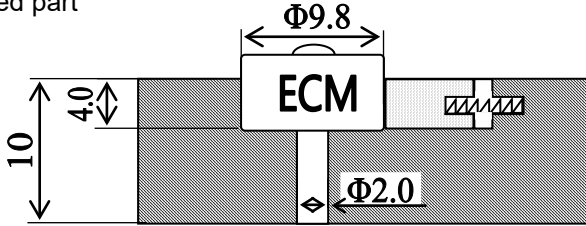
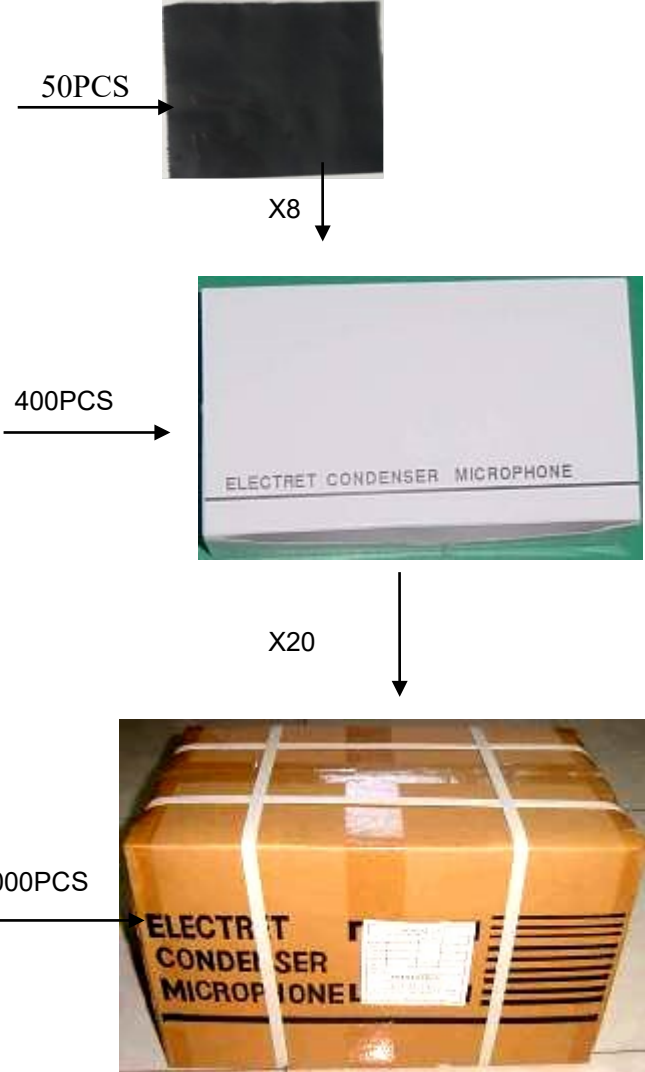
**7. Temperature Conditions**

Storage Temperature Range	Operation Temperature Range
-40°C ~ +85°C	-40°C ~ +85°C

**8. Terminal Mechanical Strength**

Terminal mechanical strength to be no interference in operation after pulled the terminal with 1kg strength for 1 minute.

<p><b>9.</b></p>	<p><b>Reliability Test</b></p> <p>After each of following test, the sensitivity of the microphone should be within <math>\pm 3\text{dB}</math> of initial sensitivity after 3 hours of conditioning at <math>20^{\circ}\text{C}</math>.</p> <p>1. <b>Vibration Test</b></p> <p><b>Frequency : 10Hz~55Hz</b></p> <p>Amplitude : 1.52mm</p> <p>Change of Frequency : 1 octave/min</p> <p>2 hours in each of axes</p> <p><b>2. High Temperature Test</b></p> <p>+85°C for 240 hours.</p> <p><b>3. Low Temperature Test</b></p> <p>-40°C for 240 hours.</p> <p><b>4. Humidity Test</b></p> <p>90%~95%RH,+60°C for 240 hours.</p> <p><b>5. Thermal shocking test</b></p> <p>-40°C, 30 minutes <math>\leftrightarrow</math> +80°C, 30 minutes, repeated 32 cycles <math>\rightarrow</math> room temperature, 3 hours.</p> <p><b>6. Temperature Cycles</b></p> <p>-40°C <math>\leftrightarrow</math> +20°C <math>\leftrightarrow</math> +85°C <math>\leftrightarrow</math> +20°C <math>\leftrightarrow</math> -40°C</p> <p>(2h) (0.5h) (2h) (0.1h) (2h) (0.5h) (2h) (0.5h) (2h) for 5 cycles.</p> <p><b>7. Packing Drop Test</b></p> <p>Height : 1.5m</p> <p><b>Procedure: 5 times from each of axes</b></p> <p><b>8. Electrostatic discharge</b></p> <p>Tested to IEC61000-4-2 level 3 :</p> <p>a) Contact discharge</p> <p>The microphone shall operate normally after 10 discharges to is 6KV DC and the discharge network is 150pF and 330<math>\Omega</math>.</p> <p>b) Air discharge</p> <p>The microphone shall operate normally after 10 discharges to is 8KV DC and the discharge network is 150pF and 330<math>\Omega</math></p>
<p><b>10.</b></p>	<p><b>Soldering Condition</b></p> <p>1. We suggest using anti-static welding machine which can control soldering temperature automatically.</p> <p>2. Soldering temperature should be controlled under <math>320^{\circ}\text{C}</math> and soldering time for each terminal should be 1~2 sec..</p> <p>3. Microphone should be fixed on the metal block (heat sink), which has high radiation effects, and heat sink shall contact with MIC tightly.</p> <p>4. Microphone may easily be destroyed by the static electricity and the countermeasure for eliminating the static electricity shall be executed (worktable and human body shall be ground connection).</p>

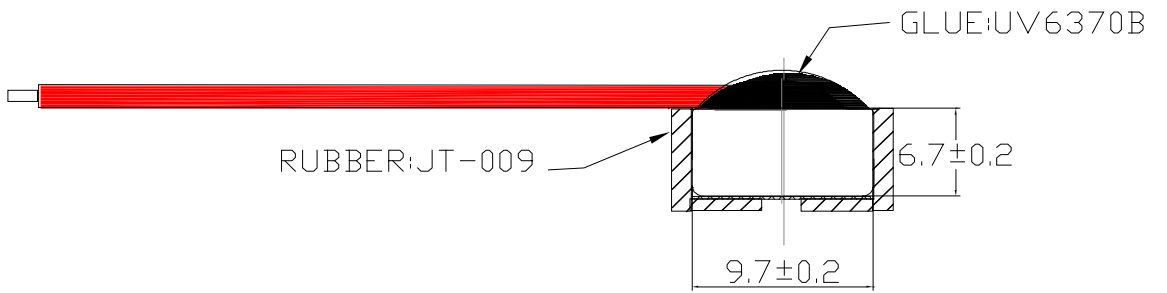
	10-5 Heat Sink      Shape of heat sink	
	Shape of hole at fixed part	
11.	<p style="text-align: center;"><b>Packing Introduction</b></p> <p><b>DIMENSION:(LENGTH*WIDTH *HEIGHT)</b></p> <p>a) SMAIL PACKET 100mm*100mm*10mm</p> <p>b) MID PACKET: 205mm*150mm*50mm</p> <p>c) PAPER CASE: 550mm*230mm*235mm</p> <p><b>EQUIPMENT</b></p> <p>a) ADHENSIVE TAPE MACHINE</p> <p>b) AUTO PACKER</p> <p><b>PACKING INTRODUCTION</b></p> <p>c) 50PCS/ SMAIL PACKET</p> <p>d) 400PCS/MID PACKET</p> <p>e) 8000PCS/PAPER CASE</p> <p><b>QUANTITY INTRODUCTION</b></p> <p>f) 1PC=1.0g</p> <p>g) NET WEIGHT : 8.0kg GROSS WEIGHT : 11.0kg</p> <p><b>LABEL STIPULATION</b></p> <p>a) LABELEDEVERY BOXES (SEE THE CHART)</p> <p>b) DIMENSIONS SHOULD BE SEEN EASILY.</p>	<p style="text-align: center;"><b>Packing chart</b></p> 

# Accessory Drawing (Unit: mm)

TOP VIEW



SIDE VIEW



BOTTOM VIEW

