


DC Brushless FAN 60x60x15m-B Type


轴承结构：双滚珠、含油、液压、其他
Bearing: two ball、sleeve、HY、other
框外材质: 塑胶(等级:UL94V-0)
Frame:Plastic(Flammability:UL94V-0)
扇叶材质:塑胶:(等级:UL94V-0)
Impeller:Plastic:(Flammability:UL94V-0)
风扇单重:30g(Weight:30g)



P@Q CURVE(AT RATEDVOLTAGE)

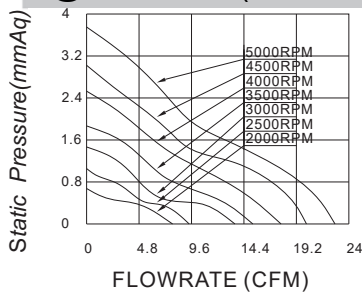

DIMENSIONS DRAWING(unit:mm)

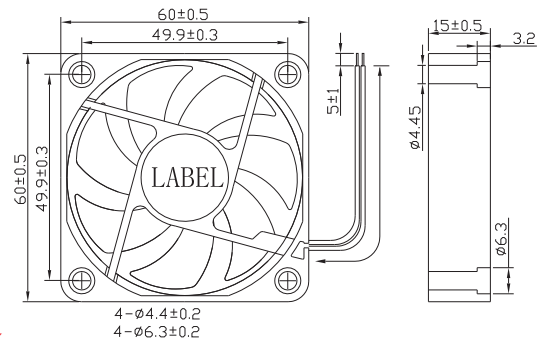

编码规则 Code Rule

例子 Example 12038H12B-1701
12038H12X-AY

Model No. is 12038H12 X; Extro P/N code is AY

X means bearing type, can be S(sleeve bearing), can be B(ball bearing), can be Y(HY bearing), can be SU(sleeve with UL), can be BU(ball with UL), can be YU(HY with UL)

Y means special function code, it will be used for a certain parts no. or client.

产品型号 12038H12X; 附加代码 AY. X是一个不确定值, 它代表了不同的轴承类型,

S(含油轴承), B(滚珠轴承), Y(液压轴承), SU(含油轴承带UL), BU(滚珠轴承带UL), YU(液压轴承带UL)

Y是一个不确定的值, 它代表不同特殊风机功能, 由具体客户或者料号来确定

Model	P/N Code	Rated Voltage	Operationg Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Noise
型号	P/N 附加码	额定电压	工作电压范围	额定电流	额定输入功率	转速	最大风量		最大风压		噪音
PART.NO.	BY	VDC	VDC	Amp	Watt	R.P.M	M³/min	CFM	mmH2O	InH2O	dB-A
MG6015L05X		5	1.8~3~6	0.12	0.6	2000	0.225	7.95	0.67	0.026	19.2
MG6015LM05X		5	1.8~3~6	0.192	0.96	2500	0.265	9.35	1.08	0.043	22.9
MG6015M05X		5	1.8~3~6	0.24	1.2	3000	0.381	13.4	1.46	0.057	24.2
MG6015ML05X		5	1.8~3~6	0.29	1.44	3500	0.439	15.5	1.93	0.076	26.9
MG6015H05X		5	1.8~3~6	0.36	1.8	4000	0.498	17.5	2.49	0.098	30.8
MG6015L12X		12	7~13.5	0.05	0.6	2000	0.225	7.95	0.67	0.026	19.2
MG6015LM12X		12	7~13.5	0.08	0.96	2500	0.265	9.35	1.08	0.043	22.9
MG6015M12X		12	7~13.5	0.10	1.2	3000	0.381	13.4	1.46	0.057	24.2
MG6015ML12X		12	7~13.5	0.12	1.44	3500	0.439	15.5	1.93	0.076	26.9
MG6015H12X		12	7~13.5	0.15	1.8	4000	0.498	17.5	2.49	0.098	30.8
MG6015HL12X		12	7~13.5	0.2	2.4	4500	0.570	20.1	3.07	0.121	34.4
MG6015HH12X		12	7~13.5	0.25	3	5000	0.636	22.4	3.72	0.146	35.2
MG6015L24X		24	18~26.5	0.025	0.6	2000	0.225	7.95	0.67	0.026	19.2
MG6015LM24X		24	18~26.5	0.04	0.96	2500	0.265	9.35	1.08	0.043	22.9
MG6015M24X		24	18~26.5	0.05	1.2	3000	0.381	13.4	1.46	0.057	24.2
MG6015ML24X		24	18~26.5	0.06	1.44	3500	0.439	15.5	1.93	0.076	26.9
MG6015H24X		24	18~26.5	0.075	1.8	4000	0.498	17.5	2.49	0.098	30.8
MG6015HL24X		24	18~26.5	0.1	2.4	4500	0.570	20.1	3.07	0.121	34.4
MG6015HH24X		24	18~26.5	0.125	3	5000	0.636	22.4	3.72	0.146	35.2