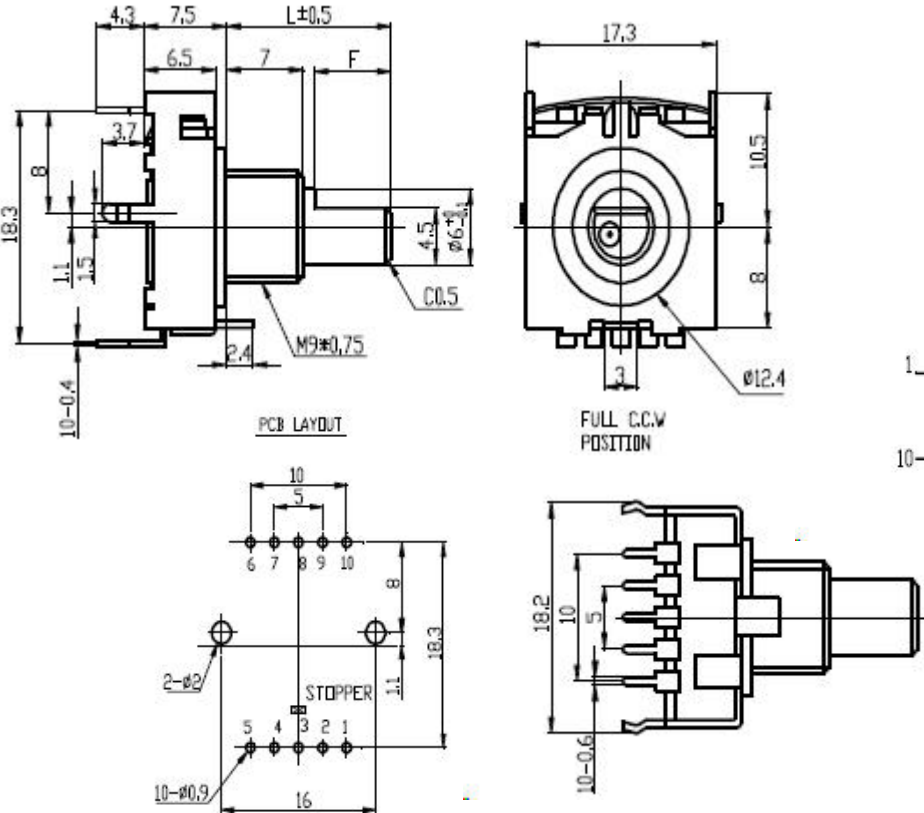





	1	2	3	4	5	6	7																					
A	RoHS Compliance							A																				
B	Product Dimensions			Operating temperature -10 °C ~ +70 °C Manual soldering 300±10°C 3±0.5sec				B																				
C				CIRCUIT 				C																				
D				Rated power(W) contact resistance Rated power(W) contact resistance Changeover angle 30° Rotational torque 200±100gfcm Number of positions 2 to 8 Number of timing 1 Changeover timing Non-shorting Nut strength ≥8kgf .cm Shaft style Flat shaft Teeth knurl Terminal style For printed wiring Switch life 10,000 cycles				D																				
E								E																				
F								F																				
G								G																				
H	KC TYPE:  <table><tr><td>L=</td><td>15</td><td>20</td></tr><tr><td>A=</td><td>7</td><td>12</td></tr></table>			L=	15	20	A=	7	12	F TYPE:  <table><tr><td>L=</td><td>15</td><td>20</td></tr><tr><td>F=</td><td>7</td><td>12</td></tr></table>				L=	15	20	F=	7	12	<table><tr><td>Description:</td><td>Mini Slide Switches</td></tr><tr><td>Part Number:</td><td>SW-R017A1320F39N-CT</td></tr><tr><td>Manufacturer:</td><td>CONN THERM</td></tr></table>		Description:	Mini Slide Switches	Part Number:	SW-R017A1320F39N-CT	Manufacturer:	CONN THERM	H
L=	15	20																										
A=	7	12																										
L=	15	20																										
F=	7	12																										
Description:	Mini Slide Switches																											
Part Number:	SW-R017A1320F39N-CT																											
Manufacturer:	CONN THERM																											
I	1	2	3	4	5	6	7	I																				